

# REALTEK

**RTL8324P**

**RTL8324P-LF**

## **24-PORT 10/100M ETHERNET SWITCH CONTROLLER WITH EMBEDDED MEMORY**

### **DATASHEET**

**Rev. 1.1**

**10 April 2006**

**Track ID: JATR-1076-21**



**Realtek Semiconductor Corp.**

No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Tel.: +886-3-578-0211. Fax: +886-3-577-6047

[www.realtek.com.tw](http://www.realtek.com.tw)

## COPYRIGHT

©2006 Realtek Semiconductor Corp. All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the written permission of Realtek Semiconductor Corp.

## DISCLAIMER

Realtek provides this document “as is”, without warranty of any kind, neither expressed nor implied, including, but not limited to, the particular purpose. Realtek may make improvements and/or changes in this document or in the product described in this document at any time. This document could include technical inaccuracies or typographical errors.

## TRADEMARKS

Realtek is a trademark of Realtek Semiconductor Corporation. Other names mentioned in this document are trademarks/registered trademarks of their respective owners.

## USING THIS DOCUMENT

This document is intended for the software engineer’s reference and provides detailed programming information.

Though every effort has been made to ensure that this document is current and accurate, more information may have become available subsequent to the production of this guide. In that event, please contact your Realtek representative for additional information that may help in the development process.

## REVISION HISTORY

Revision	Release Date	Summary
1.0	2006/02/07	First release.
1.1	2006/04/10	Correct EEPROM description (see Table 31, page 48). Add Absolute Maximum Ratings, page 92. Add pin description of internal pull-up or pull-down (see Table 1, page 6).

## Table of Contents

---

<b>1. General Description .....</b>	<b>1</b>
<b>2. Features .....</b>	<b>2</b>
<b>3. System Applications .....</b>	<b>3</b>
<b>4. Block Diagram .....</b>	<b>3</b>
<b>5. Functional Block Diagram.....</b>	<b>4</b>
<b>6. Pin Assignments.....</b>	<b>5</b>
6.1. PIN ASSIGNMENT FIGURE .....	5
6.2. LEAD (PB)-FREE PACKAGE IDENTIFICATION .....	5
6.3. PIN ASSIGNMENT TABLE (128-PIN PQFP) .....	6
<b>7. Pin Descriptions.....</b>	<b>8</b>
7.1. SMII INTERFACE .....	8
7.2. SERIAL MANAGEMENT INTERFACE (SMI) .....	10
7.3. SERIAL EEPROM INTERFACE .....	10
7.4. SYSTEM PINS .....	10
7.5. MODE CONTROL PINS .....	11
7.6. LED PINS .....	13
7.6.1. Scan LED Pins.....	13
7.6.2. Serial LED Pins.....	14
7.7. POWER/GROUND PINS .....	16
7.8. TEST PINS .....	16
<b>8. Functional Description.....</b>	<b>17</b>
8.1. RESET.....	17
8.1.1. Hardware Reset .....	17
8.1.2. Software Reset .....	17
8.2. MAC TO PHY INTERFACE.....	17
8.3. FAST ETHERNET PORT (SMII INTERFACE) .....	18
8.4. MAC ADDRESS TABLE SEARCH AND LEARNING.....	18

8.5.	MAC TABLE AGING FUNCTION .....	18
8.6.	ILLEGAL FRAME FILTERING.....	18
8.7.	IEEE 802.1D RESERVED GROUP ADDRESSES FILTERING CONTROL .....	18
8.8.	BACKOFF ALGORITHM .....	19
8.9.	INTER-PACKET GAP.....	19
8.10.	BUFFER MANAGEMENT .....	19
8.11.	FLOW CONTROL .....	19
8.11.1.	<i>IEEE 802.3x Pause Flow Control</i> .....	19
8.11.2.	<i>Half Duplex Back Pressure Flow Control</i> .....	20
8.12.	BROADCAST STORM FILTERING CONTROL .....	20
8.13.	HEAD-OF-LINE BLOCKING PREVENTION .....	20
8.14.	PORT TRUNKING AND FAULT RECOVERY SUPPORT .....	21
8.14.1.	<i>Load Balancing</i> .....	21
8.14.2.	<i>Trunk Fault Auto Recovery</i> .....	21
8.15.	IGMP SNOOPING SUPPORT.....	22
8.16.	VLAN FUNCTION.....	22
8.16.1.	<i>Port-Based VLAN</i> .....	23
8.16.2.	<i>IEEE 802.1Q Tag-Based VLAN</i> .....	23
8.16.3.	<i>Ingress/Egress Filtering Control Parameters</i> .....	23
8.16.4.	<i>Leaky VLAN</i> .....	24
8.16.5.	<i>Insert/Remove VLAN Priority Tag</i> .....	24
8.17.	QOS FUNCTION .....	25
8.17.1.	<i>Port-Based Priority</i> .....	25
8.17.2.	<i>IEEE 802.1p/Q Based Priority</i> .....	25
8.17.3.	<i>Differentiated Services Based Priority</i> .....	26
8.17.4.	<i>Flow Control Auto Turn Off</i> .....	26
8.18.	INGRESS AND EGRESS BANDWIDTH CONTROL.....	27
8.19.	SIMPLE MIB COUNTER SUPPORT .....	27
8.20.	REALTEK REMOTE CONTROL PROTOCOL .....	28
8.20.1.	<i>RRCP® Capabilities</i> .....	29
8.20.2.	<i>Management Security Scheme</i> .....	29
8.20.3.	<i>RRCP® Protocol Packet Format</i> .....	30
8.21.	NETWORK LOOP CONNECTION FAULT DETECTION .....	33
8.22.	REALTEK ECHO PROTOCOL .....	34
8.23.	DISABLE PORT.....	34

8.24. PORT PROPERTIES CONFIGURATION .....	34
8.25. SERIAL CPU INTERFACE .....	35
8.25.1. <i>Serial-CPU Access Format</i> .....	35
8.25.2. <i>EEPROM RW Command Format</i> .....	38
8.26. PHY SERIAL MANAGEMENT INTERFACE.....	40
8.26.1. <i>SMI (MDC, MDIO) Interface</i> .....	40
8.26.2. <i>PHY Register Indirect Access</i> .....	41
8.27. LED INTERFACES .....	41
8.28. PARALLEL LED INTERFACE .....	41
8.29. SERIAL LED INTERFACE .....	42
8.29.1. <i>Serial LED Display Panel Example (4 LEDs, Register 0x0005)</i> .....	43
8.29.2. <i>Serial LED Shift Out Sequence Order</i> .....	43
8.29.3. <i>Serial LED Bi-Color LED Mode</i> .....	44
8.30. SCAN LED INTERFACE .....	44
8.31. PORT MIRRORING.....	47
<b>9. Serial EEPROM Configuration (24LC08).....</b>	<b>48</b>
9.1. EEPROM CONFIGURATION VS. INTERNAL REGISTER MAPPING .....	48
<b>10. Internal Register Descriptions .....</b>	<b>53</b>
10.1. SYSTEM CONFIGURATION REGISTER .....	53
10.2. SYSTEM STATUS REGISTER .....	53
10.3. MANAGEMENT CONFIGURATION REGISTER.....	53
10.4. ADDRESS LOOKUP TABLE (ALT) CONTROL REGISTER .....	54
10.5. QUEUE CONTROL REGISTER.....	58
10.6. PHY ACCESS CONTROL REGISTER.....	58
10.7. PORT CONTROL REGISTER.....	58
10.8. MIB COUNTER REGISTER.....	59
10.8.1. <i>Port MIB Counter 1 Register (RX Counter) (32-bits)</i> .....	60
10.8.2. <i>Port MIB Counter 2 Register (TX Counter) (32-bits)</i> .....	61
10.8.3. <i>Port MIB Counter 3 Register (Diagnostic Counter) (32-bits)</i> .....	62
10.9. SYSTEM PARAMETER REGISTER (RESERVED).....	62
<b>11. Internal Register Settings .....</b>	<b>63</b>
11.1. SYSTEM CONFIGURATION REGISTER .....	63
11.1.1. <i>0x0000H: System Reset Control Register</i> .....	63

11.1.2.	<i>0x0001H: Switch Parameter Register .....</i>	64
11.1.3.	<i>0x0002H: EEPROM Check ID .....</i>	64
11.1.4.	<i>0x0004H: General Purpose User Defined I/O Data Register .....</i>	65
11.1.5.	<i>0x0005H: LED Display Configuration.....</i>	65
11.2.	<b>SYSTEM STATUS REGISTER .....</b>	66
11.2.1.	<i>0x0100H: Board Trapping Status Register.....</i>	66
11.2.2.	<i>0x0101H: Loop Detect Status Register (32-Bit Register).....</i>	66
11.2.3.	<i>0x0102H: System Fault Indication Register.....</i>	67
11.3.	<b>MANAGEMENT CONFIGURATION REGISTER.....</b>	68
11.3.1.	<i>0x0200H: Realtek Protocol Control Register.....</i>	68
11.3.2.	<i>0x0201H: RRCP Security Mask Configuration Register 0.....</i>	68
11.3.3.	<i>0x0202H: RRCP Security Mask Configuration Register 1.....</i>	69
11.3.4.	<i>0x0203H: Switch MAC ID Register 0.....</i>	69
11.3.5.	<i>0x0204H: Switch MAC ID Register 1.....</i>	69
11.3.6.	<i>0x0205H: Switch MAC ID Register 2.....</i>	69
11.3.7.	<i>0x0206H: Chip Model ID.....</i>	70
11.4.	<b>0x0207H: SYSTEM VENDER ID REGISTER 0 .....</b>	70
11.5.	<b>0x0208H: SYSTEM VENDER ID REGISTER 1 .....</b>	70
11.6.	<b>0x0209H: RRCP AUTHENTICATION KEY CONFIGURATION REGISTER.....</b>	71
11.7.	<b>0x020AH: PORT 0, 1 BANDWIDTH CONTROL REGISTER .....</b>	71
11.7.1.	<i>0x020BH~0x0215H: Port 2~23 Bandwidth Control Register .....</i>	73
11.8.	<b>0x0217H~0x0218: EEPROM RW CONTROL REGISTER .....</b>	73
11.8.1.	<i>0x0217H: EEPROM RW Command Register.....</i>	73
11.8.2.	<i>0x0218H: EEPROM RW Data Register .....</i>	73
11.9.	<b>0x0219H~0x021EH: PORT MIRROR CONTROL REGISTER.....</b>	74
11.9.1.	<i>0x0219H: Port Mirror Control Register 0 for P15-P0.....</i>	74
11.9.2.	<i>0x021AH: Port Mirror Control Register 1 for P23-P16 .....</i>	74
11.9.3.	<i>0x021BH: RX Mirror Port Register 0 for P15-P0.....</i>	74
11.9.4.	<i>0x021CH: RX Mirror Port Register 1 for P23-P16.....</i>	74
11.9.5.	<i>0x021DH: TX Mirror Port Register 0 for P15-P0.....</i>	75
11.9.6.	<i>0x021EH: TX Mirror Port Register 1 for P23-P16 .....</i>	75
11.10.	<b>ADDRESS LOOKUP TABLE (ALT) CONTROL REGISTER .....</b>	75
11.10.1.	<i>0x0300H: ALT Configuration Register.....</i>	75
11.10.2.	<i>0x0301H: Address Learning Control Register 0 .....</i>	76
11.10.3.	<i>0x0302H: Address Learning Control Register 1 .....</i>	76

11.10.4.	<i>0x0307H: Port Trunking Configuration Register .....</i>	76
11.10.5.	<i>0x0308H: IGMP Snooping Control Register.....</i>	77
11.10.6.	<i>0x0309H: IP Multicast Router Port Discovery Register (32 bits).....</i>	77
11.10.7.	<i>0x030BH: VLAN Control Register.....</i>	77
11.10.8.	<i>0x030C~0x0317H: Port VLAN ID Assignment Index Register 0~11.....</i>	79
11.10.9.	<i>0x0319~0x031BH: VLAN Output Port Priority-Tagging Control Register 0, 1, 2 .....</i>	79
11.11.0	<b>X031D~0x037CH: VLAN TABLE CONFIGURATION REGISTER .....</b>	80
11.11.1.	<i>Register VLAN(m)_Entry_Configuration_0 (Addr: (0x031DH+3m)).....</i>	80
11.11.2.	<i>Register VLAN(m)_Entry_Configuration_1 (Addr: (0x031DH+3m+1)) .....</i>	80
11.11.3.	<i>Register VLAN(m)_Entry_Configuration_2 (Addr: (0x031DH+3m+2)) .....</i>	80
11.12.0	<b>X037D~0x037EH: INSERT PER-PORT VID (PVID) ENABLING REGISTER .....</b>	81
11.12.1.	<i>0x037D: Insert Per-Port VID (PVID) Enabling Register 0 (P15~P0) .....</i>	81
11.12.2.	<i>0x037E: Insert Per-Port VID (PVID) Enabling Register 1 (P23~P16).....</i>	81
11.13.	<b>QoS CONFIGURATION REGISTER.....</b>	82
11.13.1.	<i>0x0400H: QoS Control Register.....</i>	82
11.13.2.	<i>0x0401: Port Priority Configuration Register 0.....</i>	83
11.13.3.	<i>0x0402: Port Priority Configuration Register 1 .....</i>	83
11.14.	<b>PHY ACCESS CONTROL REGISTER.....</b>	84
11.14.1.	<i>0x0500H: PHY Access Control Register.....</i>	84
11.14.2.	<i>0x0501H: PHY Access Write Data Register .....</i>	84
11.14.3.	<i>0x0502H: PHY Access Read Data Register.....</i>	84
11.15.	<b>PORT CONTROL REGISTER.....</b>	85
11.15.1.	<i>0x0607H: Global Port Control Register.....</i>	85
11.15.2.	<i>0x0608H: Port Disable Control Register 0 .....</i>	86
11.15.3.	<i>0x0609H: Port Disable Control Register 1 .....</i>	86
11.15.4.	<i>0x060AH~0x0615. Port Property Configuration Register 0 ~ 11 .....</i>	86
11.15.5.	<i>0x0619H~0x0624. Port Link Status Register 0 ~ 11 .....</i>	87
<b>12.</b>	<b>MIB Counter Register.....</b>	<b>89</b>
12.1.	<i>0x0700H~0x070BH: PORT MIB COUNTER OBJECT SELECTION REGISTER 0~11 .....</i>	89
12.2.	<i>0x070DH ~0724H: PORT MIB COUNTER 1 REGISTER (RX COUNTER) (32 BITS) .....</i>	90
12.2.1.	<i>For Port(n) MIB Counter 1 Register (32-bit). n=0, 1, 2, ... 23 (Addr: 0x070DH+n) .....</i>	91
12.2.2.	<i>0x0727~073EH: Port MIB Counter 2 Register (TX Counter) (32-bits) .....</i>	91
12.2.3.	<i>0x0741~0758H: Port MIB Counter 3 Register (Diagnostic Counter) (32-bits).....</i>	91

---

<b>13. Characteristics .....</b>	<b>92</b>
13.1. ABSOLUTE MAXIMUM RATINGS .....	92
13.2. OPERATING RANGE .....	92
13.3. DC CHARACTERISTICS .....	92
13.4. AC CHARACTERISTICS .....	93
13.4.1. <i>PHY Management (SMI) Timing</i> .....	93
13.4.2. <i>SMII Transmit Timing</i> .....	94
13.4.3. <i>SMII Receive Timing</i> .....	94
<b>14. Thermal Data.....</b>	<b>95</b>
<b>15. Mechanical Information .....</b>	<b>97</b>
15.1. MECHANICAL DIMENSIONS NOTES.....	98
<b>16. Ordering Information .....</b>	<b>98</b>

---

## List of Tables

TABLE 1. PIN ASSIGNMENT TABLE (PQFP-128).....	6
TABLE 2. SMII INTERFACE.....	8
TABLE 3. SERIAL MANAGEMENT INTERFACE (SMI).....	10
TABLE 4. SERIAL EEPROM INTERFACE.....	10
TABLE 5. SYSTEM PINS.....	10
TABLE 6. MODE CONTROL PINS .....	11
TABLE 7. SCAN LED PINS .....	13
TABLE 8. SERIAL LED PINS.....	14
TABLE 9. POWER/GROUND PINS.....	16
TABLE 10. TEST PINS .....	16
TABLE 11. VLAN TABLE FORMAT .....	22
TABLE 12. MIB OBJECT SELECTION .....	27
TABLE 13. HELLO/GET/SET/GET_REPLY PACKET FORMAT.....	30
TABLE 14. HELLO/GET/SET/GET_REPLY PACKET FORMAT DESCRIPTION.....	30
TABLE 15. HELLO_REPLY PACKET FORMAT.....	31
TABLE 16. HELLO_REPLY PACKET FORMAT DESCRIPTION.....	32
TABLE 17. LOOP DETECT PACKET FORMAT .....	33
TABLE 18. CONFIGURING PAUSE AND ASYMMETRIC PAUSE .....	34
TABLE 19. TX/RX PAUSE ABILITY IN FORCED MODE .....	35
TABLE 20. SERIAL CPU 16-BIT READ/WRITE FORMAT .....	37
TABLE 21. SERIAL CPU 32-BIT READ FORMAT .....	37
TABLE 22. 0x0217H: EEPROM RW COMMAND REGISTER .....	38
TABLE 23. 0x0218H: EEPROM RW DATA REGISTER .....	38
TABLE 24. SMI (MDC, MDIO) MANAGEMENT PACKET FORMAT .....	40
TABLE 25. SERIAL LED INTERFACE.....	42
TABLE 26. DIAGNOSTIC LED DISPLAY .....	42
TABLE 27. SCAN LED STATUS.....	44
TABLE 28. PORT MIRROR CONTROL REGISTER FOR P23-P0.....	47
TABLE 29. RX MIRROR PORT REGISTER FOR P23-P0.....	47
TABLE 30. TX MIRROR PORT REGISTER FOR P23-P0.....	47
TABLE 31. EEPROM CONFIGURATION VS. INTERNAL REGISTER MAPPING .....	48
TABLE 32. SYSTEM CONFIGURATION REGISTER.....	53
TABLE 33. SYSTEM STATUS REGISTER.....	53

TABLE 34. MANAGEMENT CONFIGURATION REGISTER .....	53
TABLE 35. ADDRESS LOOKUP TABLE (ALT) CONTROL REGISTER .....	54
TABLE 36. QUEUE CONTROL REGISTER .....	58
TABLE 37. PHY ACCESS CONTROL REGISTER .....	58
TABLE 38. PORT CONTROL REGISTER .....	58
TABLE 39. MIB COUNTER REGISTER .....	59
TABLE 40. PORT MIB COUNTER 1 REGISTER (RX COUNTER) (32-BITS) .....	60
TABLE 41. PORT MIB COUNTER 2 REGISTER (TX COUNTER) (32-BITS) .....	61
TABLE 42. PORT MIB COUNTER 3 REGISTER (DIAGNOSTIC COUNTER) (32-BITS).....	62
TABLE 43. SYSTEM PARAMETER REGISTER (RESERVED) .....	62
TABLE 44. 0x0000H: SYSTEM RESET CONTROL REGISTER.....	63
TABLE 45. 0x0001H: SWITCH PARAMETER REGISTER.....	64
TABLE 46. 0x0002H: EEPROM CHECK ID .....	64
TABLE 47. 0x0004H: GENERAL PURPOSE USER DEFINED I/O DATA REGISTER.....	65
TABLE 48. 0x0005H: LED DISPLAY CONFIGURATION .....	65
TABLE 49. 0x0100H: BOARD TRAPPING STATUS REGISTER .....	66
TABLE 50. 0x0101H: LOOP DETECT STATUS REGISTER (32-BIT REGISTER).....	66
TABLE 51. 0x0102H: SYSTEM FAULT INDICATION REGISTER.....	67
TABLE 52. 0x0200H: REALTEK PROTOCOL CONTROL REGISTER.....	68
TABLE 53. 0x0201H: RRCP SECURITY MASK CONFIGURATION REGISTER 0 .....	68
TABLE 54. 0x0202H: RRCP SECURITY MASK CONFIGURATION REGISTER 1 .....	69
TABLE 55. 0x0203H: SWITCH MAC ID REGISTER 0.....	69
TABLE 56. 0x0204H: SWITCH MAC ID REGISTER 1.....	69
TABLE 57. 0x0205H: SWITCH MAC ID REGISTER 2.....	69
TABLE 58. 0x0206H: CHIP MODEL ID .....	70
TABLE 59. 0x0207H: SYSTEM VENDER ID REGISTER 0 .....	70
TABLE 60. 0x0208H: SYSTEM VENDER ID REGISTER 1 .....	70
TABLE 61. 0x0209H: RRCP AUTHENTICATION KEY CONFIGURATION REGISTER .....	71
TABLE 62. 0x020AH: PORT 0, 1 BANDWIDTH CONTROL REGISTER.....	71
TABLE 63. 0x020BH~0x0215H: PORT 2~23 BANDWIDTH CONTROL REGISTER .....	73
TABLE 64. 0x0217H: EEPROM RW COMMAND REGISTER .....	73
TABLE 65. 0x0218H: EEPROM RW DATA REGISTER .....	73
TABLE 66. PORT MIRROR CONTROL REGISTER FOR P15-P0.....	74
TABLE 67. PORT MIRROR CONTROL REGISTER FOR P23-P16.....	74
TABLE 68. RX MIRROR PORT REGISTER 0 FOR P15-P0.....	74

TABLE 69. RX MIRROR PORT REGISTER 1 FOR P23-P16.....	74
TABLE 70. TX MIRROR PORT REGISTER 0 FOR P15-P0 .....	75
TABLE 71. RX MIRROR PORT REGISTER 1 FOR P23-P16.....	75
TABLE 72. 0x0300H: ALT CONFIGURATION REGISTER.....	75
TABLE 73. 0x0301H: ADDRESS LEARNING CONTROL REGISTER 0 .....	76
TABLE 74. 0x0302H: ADDRESS LEARNING CONTROL REGISTER 1 .....	76
TABLE 75. 0x0307H: PORT TRUNKING CONFIGURATION REGISTER .....	76
TABLE 76. 0x0308H: IGMP SNOOPING CONTROL REGISTER .....	77
TABLE 77. 0x0309H: IP MULTICAST ROUTER PORT DISCOVERY REGISTER (32 BITS).....	77
TABLE 78. 0x030BH: VLAN CONTROL REGISTER.....	77
TABLE 79. 0x030C~0x0317H: PORT VLAN ID ASSIGNMENT INDEX REGISTER 0~11 .....	79
TABLE 80. 0x0319~0x031BH: VLAN OUTPUT PORT PRIORITY-TAGGING CONTROL REGISTER 0, 1, 2 .....	79
TABLE 81. REGISTER VLAN(M)_ENTRY_CONFIGURATION_0 (ADDR: (0x031DH+3M)) .....	80
TABLE 82. REGISTER VLAN(M)_ENTRY_CONFIGURATION_1 (ADDR: (0x031DH+3M+1)) .....	80
TABLE 83. REGISTER VLAN(M)_ENTRY_CONFIGURATION_2 (ADDR: (0x031DH+3M+2)) .....	80
TABLE 84. INSERT PER-PORT VID (PVID) ENABLING REGISTER 0 .....	81
TABLE 85. INSERT PER-PORT VID (PVID) ENABLING REGISTER 1 .....	81
TABLE 86. 0x0400H: QOS CONTROL REGISTER .....	82
TABLE 87. 0x0401: PORT PRIORITY CONFIGURATION REGISTER 0 .....	83
TABLE 88. 0x0402: PORT PRIORITY CONFIGURATION REGISTER 1 .....	83
TABLE 89. 0x0500H: PHY ACCESS CONTROL REGISTER .....	84
TABLE 90. 0x0501H: PHY ACCESS WRITE DATA REGISTER .....	84
TABLE 91. 0x0502H: PHY ACCESS READ DATA REGISTER .....	84
TABLE 92. 0x0607H: GLOBAL PORT CONTROL REGISTER.....	85
TABLE 93. 0x0608H: PORT DISABLE CONTROL REGISTER 0 .....	86
TABLE 94. 0x0609H: PORT DISABLE CONTROL REGISTER 1 .....	86
TABLE 95. 0x060AH~0x0615. PORT PROPERTY CONFIGURATION REGISTER 0 ~ 11 .....	86
TABLE 96. 0x0619H~0x0625. PORT LINK STATUS REGISTER 0 ~ 11.....	87
TABLE 97. 0x0700H~0x070BH: PORT MIB COUNTER OBJECT SELECTION REGISTER 0~11 .....	89
TABLE 98. MIB COUNTER TIMEOUT .....	90
TABLE 99. 0x070DH ~0724H: PORT MIB COUNTER 1 REGISTER (RX COUNTER) (32 BITS) .....	91
TABLE 100. 0x0727~073EH: PORT MIB COUNTER 2 REGISTER (TX COUNTER) (32 BITS) .....	91
TABLE 101. 0x0741~0758H: PORT MIB COUNTER 3 REGISTER (DIAGNOSTIC COUNTER) (32 BITS) .....	91
TABLE 102. ABSOLUTE MAXIMUM RATINGS .....	92
TABLE 103. OPERATING RANGE.....	92

---

TABLE 104. DC CHARACTERISTICS.....	92
TABLE 105. PHY MANAGEMENT (SMI) TIMING.....	93
TABLE 106. PHY MANAGEMENT (SMI) TIMING.....	94
TABLE 107. SMII RECEIVE TIMING.....	94
TABLE 108. THERMAL OPERATING RANGE.....	96
TABLE 109. THERMAL RESISTANCES .....	96
TABLE 110. ORDERING INFORMATION .....	98

---

---

## List of Figures

---

FIGURE 1. BLOCK DIAGRAM.....	3
FIGURE 2. FUNCTIONAL BLOCK DIAGRAM .....	4
FIGURE 3. PIN ASSIGNMENTS .....	5
FIGURE 4. 802.1Q VLAN TAG FRAME FORMAT.....	26
FIGURE 5. IPv4 FRAME FORMAT .....	26
FIGURE 6. REALTEK REMOTE CONTROL PROTOCOL .....	28
FIGURE 7. REALTEK ECHO PROTOCOL FRAME .....	34
FIGURE 8. SERIAL CPU INTERFACE .....	35
FIGURE 9. START AND STOP DEFINITION .....	36
FIGURE 10. OUTPUT ACKNOWLEDGE (ACK) .....	36
FIGURE 11. EEPROM READ/WRITE PROCEDURE .....	39
FIGURE 12. SERIAL LED DISPLAY .....	43
FIGURE 13. SCAN LED TIMING DIAGRAM .....	45
FIGURE 14. EXTERNAL CIRCUIT FOR SCAN LED .....	46
FIGURE 15. MDC/Mdio WRITE TIMING .....	93
FIGURE 16. MDC/Mdio READ TIMING.....	93
FIGURE 17. MDC/Mdio RESET TIMING.....	93
FIGURE 18. SMII TRANSMIT TIMING.....	94
FIGURE 19. SMII RECEIVE TIMING .....	94

---

## 1. General Description

The RTL8324P is a layer-2 switch controller that integrates 1.25Mbits of high-speed SSRAM, an 8K-entry MAC address lookup table, 24 Ethernet/Fast Ethernet MACs, and a switch engine into one chip.

The Remote Management Tool (RMT) software package is bundled with the RTL8324P. The RMT is a Windows-based tool developed to enhance the functionality of Realtek's dumb layer 2 switches via software. The RMT gives network administrators the ability to remotely configure and monitor dumb layer 2 switches as though they were intelligent switches. With QoS, Trunking, VLAN, bandwidth control, remote control, and an  $0.18\mu\text{m}$  process, the RTL8324P is a cost effective switch controller for a 24-Port 10/100 dumb or smart switch application.

Port trunking is supported on all ports to increase bandwidth. Load balancing and fault tolerance provide top performance and reliability. The RTL8324P provides 2-level priority queues for multimedia or real-time network applications. The CoS (Class of Service) can be port-based, IEEE 802.1p tag-based, and/or TCP/IP header TOS/DS field-based. The RTL8324P supports up to 32 VLAN groups that may be configured as port-based VLANs and/or IEEE 802.1Q tagged VLANs. ARP broadcast and Leaky VLAN are also supported.

The RTL8324P supports diagnostics and analysis. Counters are included for: RX byte count, RX packet count, TX byte count, TX packet count, CRC error packet count, collision packet count, dropped packet count, and dropped byte count. The RTL8324P supports TX and RX bandwidth control on each port; 128Kbps, 256Kbps, 512kbps, 1Mbps, 2Mbps, 4Mbps, or 8Mbps may be selected in each direction.

The RTL8324P provides for a Scan LED Group to display each port's status, without extra component cost. A loop-detection function is provided to notify whether a network loop exists, either via a visual LED, or via a register flag for smart applications. LED displays for broadcast storm, trunking status, flow control, and traffic utilization are also provided.

Maximum packet length can be up to 1552 bytes. The RTL8324P supports the ability to drop 802.1D specified reserved group MAC addresses: (01-80-C2-00-00-04 to 01-80-C2-00-00-0F) according to pin strapping upon reset, or register setting. The RTL8324P default setting enables dropping of these reserved group MAC address control frames. Frames with group MAC address 01-80-C2-00-00-01 (802.3x Pause), 01-80-C2-00-00-02 (802.3ad LACP) will always be filtered.

The RTL8324P supports IEEE 802.3x full duplex flow control and back pressure half duplex flow control. Full duplex flow control can be disabled both manually or automatically to ensure QoS control or bandwidth control operates correctly. Broadcast storm filtering prevents network crashes caused by abnormal broadcast activity.

As well as supporting IEEE 802.3u auto-negotiation, the RTL8324P supports PHY Read/Write registers to access PHY registers through an MDC/MDIO interface. This expands system configuration options. In-band management of the functions provided by the RTL8324P may be implemented using a simple 8051 microprocessor, or via the RTL8324P's RRCP® protocol based Remote Management Tool (RMT).

The RTL8324P is designed with a link-list buffer management architecture and provides 4.8Gbps of bandwidth to achieve wire-speed performance. It also has an intelligent switching engine to prevent Head-of-Line blocking. Only a single 25MHz crystal is required for clock generation.

## 2. Features

- 24-port 10/100Mbps layer-2 Ethernet switch controller with embedded lookup table and packet buffer
- Supports SMII on all ports
- Built-in 8K entry MAC address lookup table plus 64-entry CAM to eliminate hash collision problems
- Built-in 1.25Mbit SSRAM packet buffer
- Non-blocking wire-speed forwarding and filtering (4.8Gbps throughput)
- Store and forward architecture and head-of-line blocking prevention
- All ports support Speed, Duplex, and 802.3x flow-control ability auto-negotiation
- Supports broadcast storm filtering control
- Supports Trunking function with load balancing and fault tolerance
- Supports up to 32 VLAN groups for port-based VLAN and 802.1Q tag VLAN
- Supports Leaky VLAN
- Two priority queues for three types of Class of Service (CoS)
  - ◆ Port-based
  - ◆ IEEE 802.1p priority tag
  - ◆ TCP/IP header's TOS/DS classifier
- Weighted round robin queue scheduling
- Priority tag insert and remove function
- Supports ASIC based IGMPv1 and IGMPv2 snooping function
- Supports pin strapping, EEPROM, or serial CPU configuration interface
- Supports PHY register read/write access
- Supports Realtek Management Tool (RMT<sup>®</sup>) for in-band configuration and management
- Supports simple MIB counters
- TX/RX packet/byte, CRC error, and collision counter for diagnostics/statistics
- Supports per-port bandwidth control
- Supports loop detection and indication function
- Provides Scan LED, serial LED, and parallel LED interface for port properties and diagnostic display
- Provides Write EEPROM function via software (RMT<sup>®</sup> or MPU) for Smart Switch applications
- Provides configurable Port Mirror function
- Needs only one low cost 25MHz crystal or OSC input
- 0.18μm, 128-pin PQFP, 3.3V single power, 5V I/O tolerance

### 3. System Applications

10/100Mbps switch controller for a 24-Port 10/100 dumb or smart switch application.

In-band management of the functions provided by the RTL8324P may be implemented using a simple 8051 microprocessor, or via the RTL8324P's RRCP® protocol based Remote Management Tool (RMT)

### 4. Block Diagram

#### Dumb/Smart

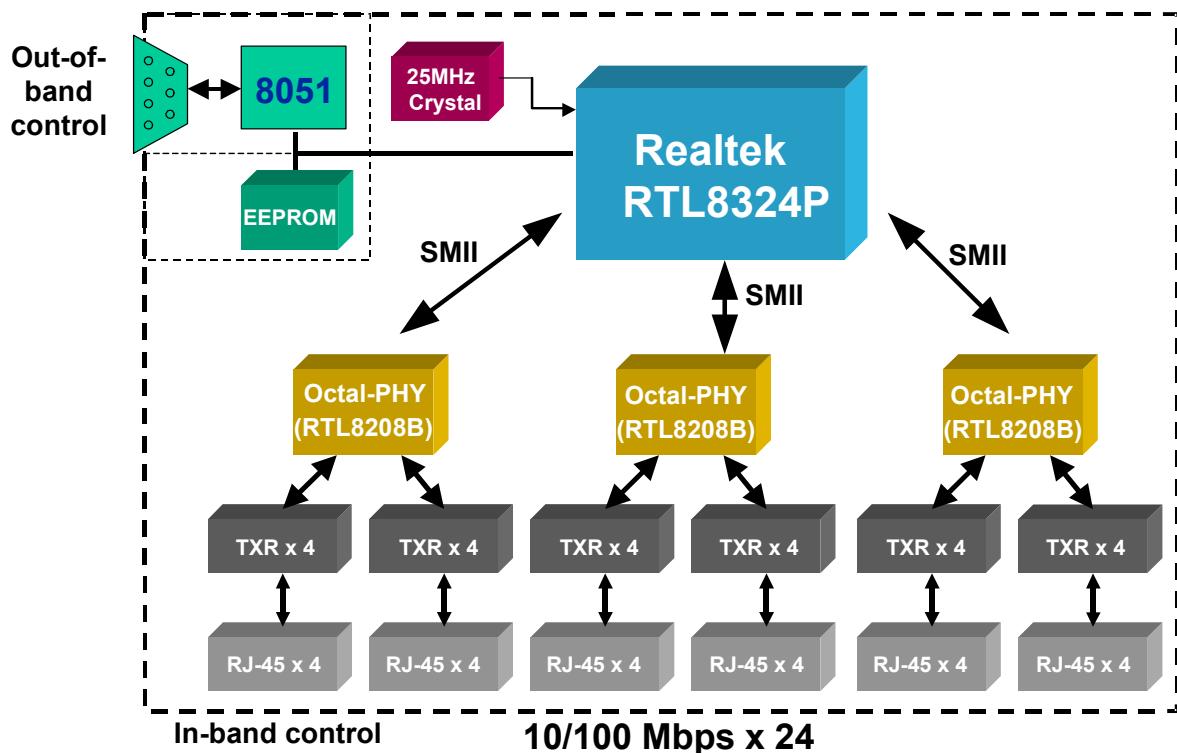


Figure 1. Block Diagram

## 5. Functional Block Diagram

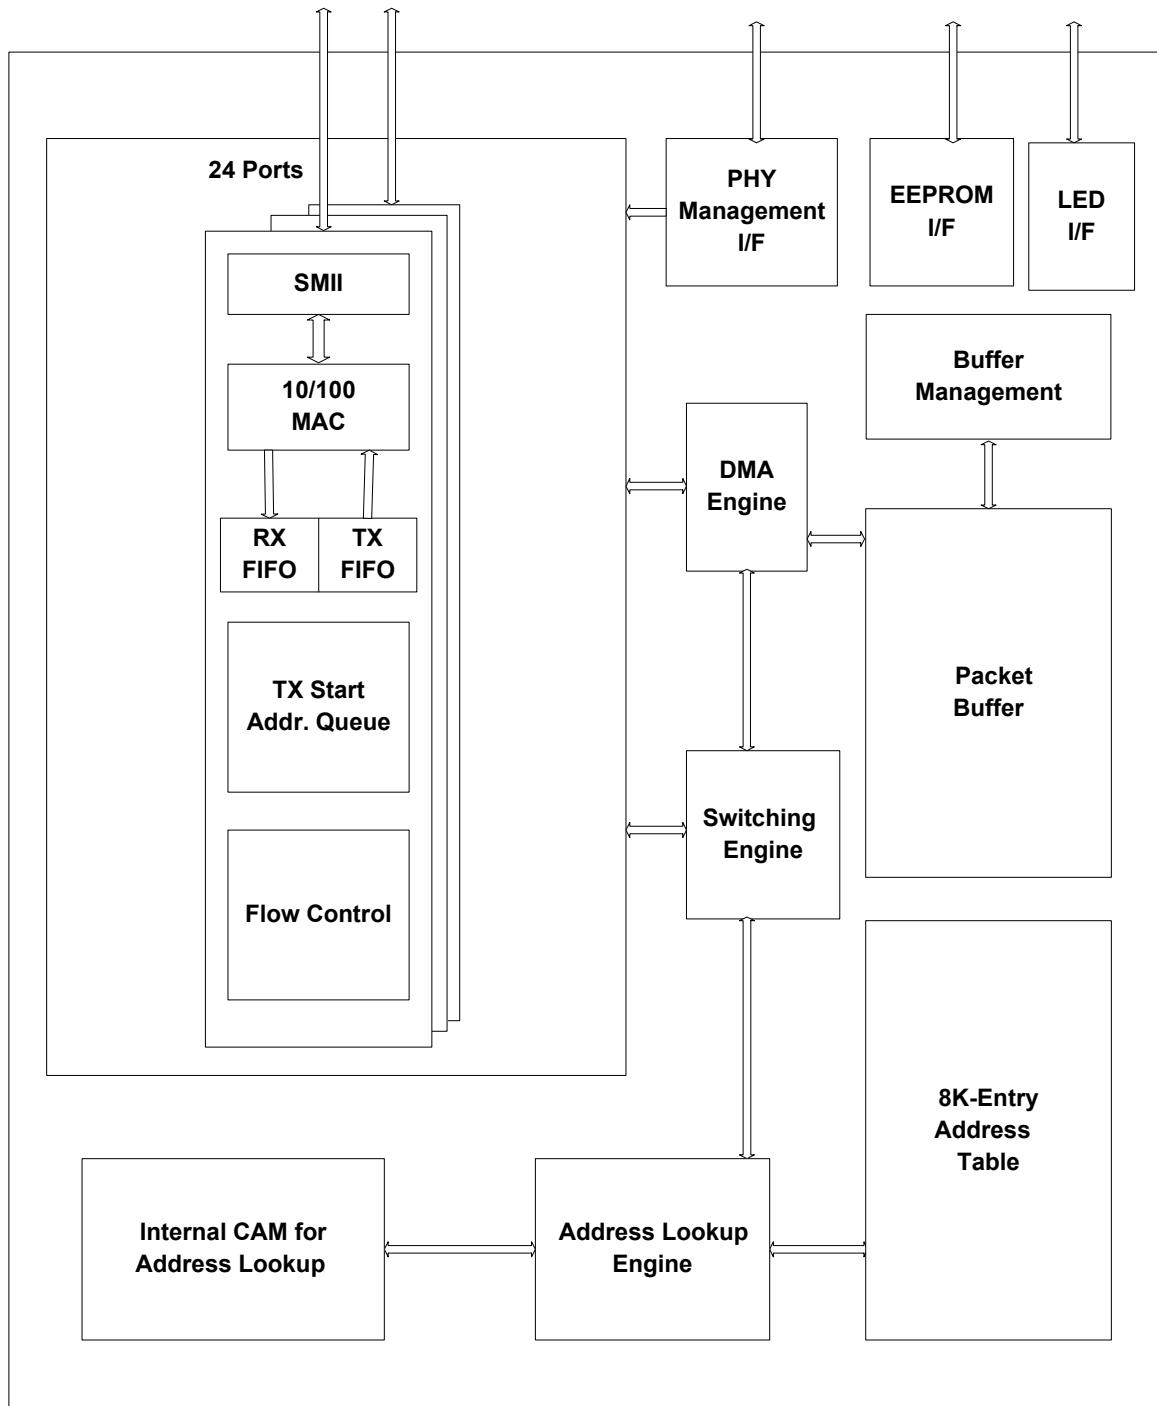


Figure 2. Functional Block Diagram

## 6. Pin Assignments

### 6.1. Pin Assignment Figure

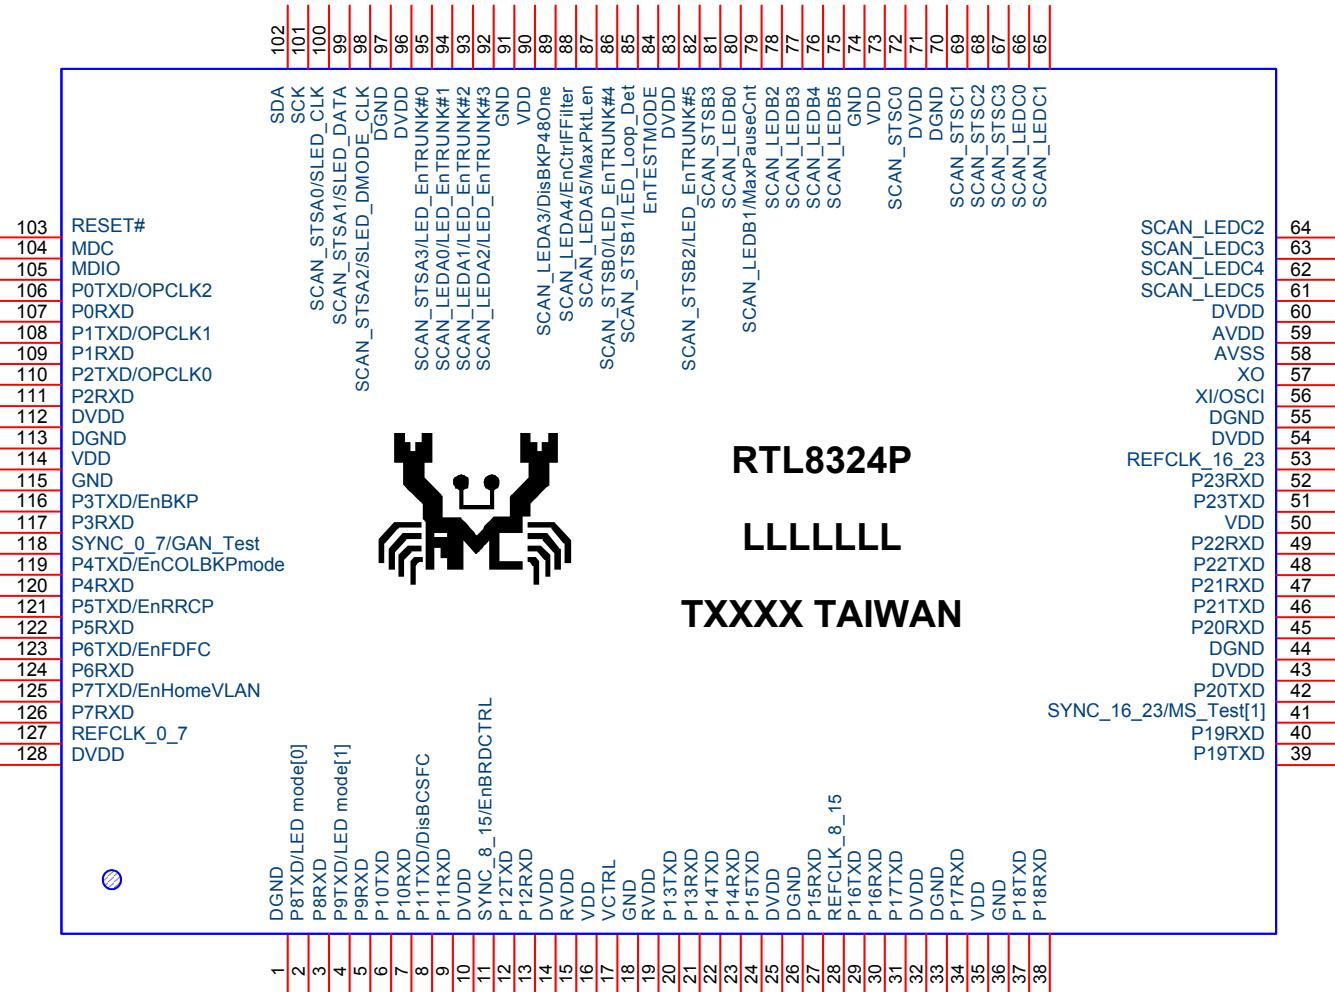


Figure 3. Pin Assignments

### 6.2. Lead (Pb)-Free Package Identification

Lead (Pb)-free package is indicated by an 'L' in the location marked 'T' in Figure 3.

### 6.3. Pin Assignment Table (128-Pin PQFP)

Type codes used: P=Power; G=Ground, I=Input, O=Output. PU= Internal Pull-up. PD= Internal Pull-down. Internal resistor = 40KΩ

**Table 1. Pin Assignment Table (PQFP-128)**

Pin No.	Type	Pin Name
1	G	DGND
2	I/O <sub>PU</sub>	P8TXD/LED mode[0]
3	I <sub>PD</sub>	P8RXD
4	I/O <sub>PD</sub>	P9TXD/LED mode[1]
5	I <sub>PU</sub>	P9RXD
6	O <sub>PU</sub>	P10TXD
7	I <sub>PD</sub>	P10RXD
8	O <sub>PD</sub>	P11TXD/DisBCSFC
9	I <sub>PD</sub>	P11RXD
10	P	DVDD
11	I/O <sub>PD</sub>	SYNC_8_15/EnBRDCTRL
12	O <sub>PD</sub>	P12TXD
13	I <sub>PD</sub>	P12RXD
14	P	DVDD
15	P	RVDD
16	P	VDD
17	O	VCTRL
18	G	GND
19	P	RVDD
20	O <sub>PD</sub>	P13TXD
21	I <sub>PD</sub>	P13RXD
22	O <sub>PD</sub>	P14TXD
23	I <sub>PD</sub>	P14RXD
24	O <sub>PD</sub>	P15TXD
25	P	DVDD
26	G	DGND
27	I <sub>PD</sub>	P15RXD
28	O <sub>PD</sub>	REFCLK_8_15
29	O <sub>PD</sub>	P16TXD
30	I <sub>PD</sub>	P16RXD
31	O <sub>PD</sub>	P17TXD
32	P	DVDD
33	G	DGND
34	I <sub>PD</sub>	P17RXD
35	P	VDD
36	G	GND
37	O <sub>PU</sub>	P18TXD

Pin No.	Type	Pin Name
38	I <sub>PD</sub>	P18RXD
39	O <sub>PU</sub>	P19TXD
40	I <sub>PU</sub>	P19RXD
41	I/O <sub>PU</sub>	SYNC_16_23/MS_Test[1]
42	O <sub>PU</sub>	P20TXD
43	P	DVDD
44	G	DGND
45	I <sub>PD</sub>	P20RXD
46	O <sub>PD</sub>	P21TXD
47	I <sub>PD</sub>	P21RXD
48	O <sub>PD</sub>	P22TXD
49	I <sub>PD</sub>	P22RXD
50	P	VDD
51	O <sub>PD</sub>	P23TXD
52	I <sub>PD</sub>	P23RXD
53	O <sub>PD</sub>	REFCLK_16_23
54	P	DVDD
55	G	DGND
56	I	XI/OSCI
57	O	XO
58	G	AVSS
59	P	AVDD
60	P	DVDD
61	O <sub>PU</sub>	SCAN_LED5
62	O <sub>PU</sub>	SCAN_LED4
63	O <sub>PU</sub>	SCAN_LED3
64	O <sub>PU</sub>	SCAN_LED2
65	O <sub>PU</sub>	SCAN_LED1
66	O <sub>PU</sub>	SCAN_LED0
67	O <sub>PU</sub>	SCAN_STSC3
68	O <sub>PU</sub>	SCAN_STSC2
69	O <sub>PU</sub>	SCAN_STSC1
70	G	DGND
71	P	DVDD
72	O <sub>PU</sub>	SCAN_STSC0
73	P	VDD
74	G	GND

Pin No.	Type	Pin Name
75	O <sub>PU</sub>	SCAN_LED_B5
76	O <sub>PD</sub>	SCAN_LED_B4
77	O <sub>PD</sub>	SCAN_LED_B3
78	O <sub>PD</sub>	SCAN_LED_B2
79	I/O <sub>PD</sub>	SCAN_LED_B1/MaxPauseCnt
80	O <sub>PU</sub>	SCAN_LED_B0
81	O <sub>PU</sub>	SCAN_STSB3
82	O <sub>PU</sub>	SCAN_STSB2/ LED_EnTRUNK#5
83	G	DVDD
84	O	EnTESTMODE
85	O <sub>PU</sub>	SCAN_STSB1/LED_Loop_Det
86	O <sub>PU</sub>	SCAN_STSB0/ LED_EnTRUNK#4
87	I/O <sub>PD</sub>	SCAN_LED_A5/MaxPktLen
88	I/O <sub>PD</sub>	SCAN_LED_A4/EnCtrlFFFilter
89	I/O <sub>PU</sub>	SCAN_LED_A3/DisBKP48One
90	P	VDD
91	G	GND
92	O <sub>PU</sub>	SCAN_LED_A2/LED_EnTRUNK#3
93	O <sub>PU</sub>	SCAN_LED_A1/LED_EnTRUNK#2
94	O <sub>PU</sub>	SCAN_LED_A0/LED_EnTRUNK#1
95	O <sub>PU</sub>	SCAN_STSA3/LED_EnTRUNK#0
96	P	DVDD
97	G	DGND
98	O <sub>PU</sub>	SCAN_STSA2/SLED_DMODE_CLK
99	O <sub>PU</sub>	SCAN_STSA1/SLED_DATA
100	O <sub>PU</sub>	SCAN_STSA0/SLED_CLK
101	I/O <sub>PU</sub>	SCK
102	I/O <sub>PU</sub>	SDA
103	I <sub>PU</sub>	RESET#
104	O <sub>PU</sub>	MDC
105	I/O <sub>PU</sub>	MDIO
106	O <sub>PD</sub>	P0TXD/OPCLK2
107	I <sub>PD</sub>	P0RXD
108	O <sub>PD</sub>	P1TXD/OPCLK1
109	I <sub>PD</sub>	P1RXD
110	O <sub>PD</sub>	P2TXD/OPCLK0
111	I <sub>PU</sub>	P2RXD
112	P	DVDD
113	G	DGND
114	P	VDD
115	G	GND
116	I/O <sub>PU</sub>	P3TXD/EnBKP
117	I <sub>PU</sub>	P3RXD

Pin No.	Type	Pin Name
118	I/O <sub>PU</sub>	SYNC_0_7/GAN_Test
119	I/O <sub>PD</sub>	P4TXD/EnCOLBKPmode
120	I <sub>PD</sub>	P4RXD
121	I/O <sub>PD</sub>	P5TXD/EnRRCP
122	I <sub>PD</sub>	P5RXD
123	I/O <sub>PU</sub>	P6TXD/EnFDFC
124	I <sub>PD</sub>	P6RXD
125	I/O <sub>PD</sub>	P7TXD/EnHomeVLAN
126	I <sub>PD</sub>	P7RXD
127	O <sub>PU</sub>	REFCLK_0_7
128	P	DVDD

## 7. Pin Descriptions

Type codes used: P=Power; G=Ground, I=Input, O=Output, Pu=Internal pull up (40K ohm), Pd=Internal pull down (40K ohm).

### 7.1. SMII Interface

**Table 2. SMII Interface**

Pin Name	Type	Pin No.	Description
P0TXD	O	106	SMII Transmit Data Output: SMII transmit data is formed in 10-bit serial words. Each word contains one data byte (two nibbles of 4B coded data) and two status bits.
P1TXD		108	
P2TXD		110	
P3TXD		116	
P4TXD		119	The SMII operates at 125MHz using a global reference clock (REFCLK) and frame synchronization signal (SYNC).
P5TXD		121	
P6TXD		123	
P7TXD		125	SMII transmit data is input on these pins, where:
P8TXD		2	Ports 0~7 transmit data is sent synchronously to SYNC_0_7 and REFCLK_0_7.
P9TXD		4	
P10TXD		6	
P11TXD		8	Ports 8~15 transmit data is sent synchronously to SYNC_8_15 and REFCLK_8_15.
P12TXD		12	
P13TXD		20	
P14TXD		22	Ports 16~23 transmit data is sent synchronously to SYNC_16_23 and REFCLK_16_23.
P15TXD		24	
P16TXD		29	
P17TXD		31	
P18TXD		37	
P19TXD		39	
P20TXD		42	
P21TXD		46	
P22TXD		48	
P23TXD		51	

Pin Name	Type	Pin No.	Description
P0RXD	I	107	SMII Receive Data Input: SMII receive data is input on these pins. Where:
P1RXD		109	
P2RXD		111	
P3RXD		117	Ports 0~7 receive data is received synchronously to SYNC_0_7 and REFCLK_0_7.
P4RXD		120	
P5RXD		122	
P6RXD		124	Ports 8~15 receive data is received synchronously to SYNC_8_15 and REFCLK_8_15.
P7RXD		126	
P8RXD		3	
P9RXD		5	Ports 16~23 receive data is received synchronously to SYNC_16_23 and REFCLK_16_23.
P10RXD		7	
P11RXD		9	
P12RXD		13	
P13RXD		21	
P14RXD		23	
P15RXD		27	
P16RXD		30	
P17RXD		34	
P18RXD		38	
P19RXD		40	
P20RXD		45	
P21RXD		47	
P22RXD		49	
P23RXD		52	
SYNC_0_7	O	118	SMII Synchronization Output.
SYNC_8_15		11	SMII transmit/receive data 10-bit word frame synchronization. Where:
SYNC_16_23		41	SYNC_0_7 synchronizes data for ports 0~7. SYNC_8_15 synchronizes data for ports 8~15. SYNC_16_23 synchronizes data for ports 16~23.
REFCLK_0_7	O	127	SMII Reference Clock Output.
REFCLK_8_15		28	The SMII reference clock output is a 125MHz +- 50ppm clock used to synchronize the SMII data.
REFCLK_16_23		53	Ports 0~7 data is sent or received synchronously to SYNC_0_7. Ports 8~15 data is sent or received synchronously to SYNC_8_15. Ports 16~23 data is sent or received synchronously to SYNC_16_23.

## 7.2. Serial Management Interface (SMI)

**Table 3. Serial Management Interface (SMI)**

Pin Name	Type	Pin No	Description
MDC	O (Pu)	104	Serial Management Data Clock (MDC). MDC typically operates at 730KHz. MDC is in tri-state when RST# is active low.
MDIO	IO (Pu)	105	Serial Management Data Input/Output. MDIO is in tri-state when RST# is active low.

## 7.3. Serial EEPROM Interface

**Table 4. Serial EEPROM Interface**

Pin Name	Type	Pin No	Description
SCK	IO (Pu)	101	Serial EEPROM Interface Clock Output/ Serial CPU Access Clock Input. SCLK acts as an output pin after hardware reset for EEPROM read access. When the configuration download from EEPROM is finished, or if the EEPROM does not exist, then the SCLK will act as an input pin driven by an external CPU to access the RTL8324P internal registers.  SCLK Frequency: Output: Operates at 100KHz Input: Max limit: 10MHz
SDA	IO (Pu)	102	Serial EEPROM Data Input/Output/Serial CPU Access Data Input/Output. After power on, this pin is EEPROM serial data IO. When the configuration download from EEPROM is finished, or if the EEPROM does not exist, then this pin acts as a serial CPU data IO.

## 7.4. System Pins

**Table 5. System Pins**

Pin Name	Type	Pin No	Description
RESET#	I (Pu)	103	System Reset. Active low to reset the system to a known state. After power-on reset (low to high), the configuration modes from Mode Control Pins (page 11) are strapped and determined.
XI/OSCI	I	56	Crystal Input/Oscillator Input. This is a 25Mhz +-50 ppm crystal input or oscillator input. When crystal is used, a capacitor connected from this pin to ground is recommended.
XO	O	57	Crystal Output. When crystal is used, a capacitor connected from this pin to ground is recommended. When an oscillator is used, keep this pin floating.

## 7.5. Mode Control Pins

The Mode Control pin values are strapped on power on reset. The strapped values may be updated via EEPROM configuration if it exists. They can also be modified by internal register access from the CPU interface.

**Table 6. Mode Control Pins**

Pin Name	Pin No.	Type	Description
MaxPktLen (SCAN_LED_A5)	87	I/O (P-down)	Max. Valid Packet Length Control. 0: 1536 bytes (Default) 1: 1552 bytes
MaxPauseCnt (SCAN_LED_B1)	79	I/O (P-down)	Max Pause frame Count for Congestion Control. 0: 128 (Default) 1: Continuous
EnCOLBKPMODE (P4TXD)	119	I/O (P-down)	Enable Carrier-Based Back Pressure Mode. Half duplex back pressure flow control algorithm selection. 0: Carrier-based back pressure mode (Default) 1: Collision-based back pressure mode
EnRRCP (P5TXD)	121	I/O (P-down)	Disable Realtek Remote Control Protocol Function. 0: Disable RRCP (Default) 1: Enable RRCP
EnCtrlFFilter/ (SCAN_LED_A4)	88	I/O (P-down)	Enable 802.1D Specified Reserved Control Frame Filtering. When network control frames are received with the destination MAC address as the group MAC address: (01-80-C2-00-00-04 ~ 01-80-C2-00-00-0F), the switch will drop the frames if the EnCtrlFilter=1. If EnCtrlFilter=0 the frames will be flooded. 0: Disable Filtering (Default) 1: Enable Filtering
EnHomeVLAN (P7TXD)	125	I/O (P-down)	Enable Home-VLAN Configuration. When enabled, the switch will be configured in Home-VLAN mode. The “Home-Vlan topology” is shown below: 0: Disable Home-VLAN Function (Default) 1: Enable (set VLAN as 22 VLANs with 2 overlapping port).
EnFDFFC (P6TXD)	123	I/O (P-up)	Global Disable Full Duplex 802.3x Pause Flow Control Ability. Globally disables the 802.3x Pause ability flow control of all ports. 1: Enable 802.3x Pause flow control ability (Default) 0: Disable 802.3x Pause flow control ability
EnBKP (P3TXD)	116	I/O (P-up)	Global Disable Half Duplex Back Pressure Flow Control Ability. Globally disables the back pressure flow control ability of all ports. 1: Enable back pressure flow control ability (Default) 0: Disable back pressure flow control ability
EnBKP48One (SCAN_LED_A3)	89	I/O (P-up)	Enable Back Pressure 48 Pass One Algorithm. When the 48 Pass One algorithm is enabled, the switch will pass one incoming packet for every 48 collisions. 0: Disable 48 Pass One algorithm 1: Enable 48 Pass One algorithm (Default)

Pin Name	Pin No.	Type	Description
DisBCSFC (P11TXD)	8	I/O (P-down)	<p>Disable Broadcast Packet Strict Flood Control.</p> <p>Set to disable broadcast packet (DA: 'FF-FF-FF-FF-FF-FF') strict flood mode and configure to loose flood mode.</p> <p>Strict flood mode will drop all broadcast packets if any one destination port is congested.</p> <p>Loose flood mode allows broadcast packets to be flooded to all non-congested ports.</p> <p>0: Enable Broadcast Packet Strict Flood (Strict flood mode) (Default) 1: Disable Broadcast Packet Strict Flood (Loose flood mode)</p>
EnBRDCTRL (SYNC_8_15)	11	I/O (P-down)	<p>Broadcast Storm Filtering Control.</p> <p>Disables broadcast storm filtering control.</p> <p>0: Disable Broadcast storm filtering control (Default) 1: Enable Broadcast storm filtering control</p>
LED mode[1:0] P9TXD P8TXD	4 2	I/O (P-down, P-up)	<p>00: Scan LED mode. 01: Serial LED mode (single color) (default) 10: Serial LED mode (bi-color) 11: Reserved</p>

## 7.6. LED Pins

### 7.6.1. Scan LED Pins

**Table 7. Scan LED Pins**

Pin Name	Pin No.	Type	Description
Port 0_7		I/O	Scan LED pins display for port0~port7 link status.
Scan_LED Group			In Scan LED mode, this LED group display each port's (1)Speed (2) Link/Active (3) Collision/Duplex status without external TTL.
SCAN_LED A5	87		
SCAN_LED A4	88		
SCAN_LED A3	89		
SCAN_LED A2	92		
SCAN_LED A1	93		
SCAN_LED A0	94		
SCAN_STSA3	95		
SCAN_STSA2	98		
SCAN_STSA1	99		
SCAN_STSA0	100		
Port 8_15		I/O	Scan LED pins display for port8~port15 link status.
Scan_LED Group			In Scan LED mode, this LED group display each port's (1) Speed (2) Link/Active (3) Collision/Duplex status without external TTL.
SCAN_LED B5	75		
SCAN_LED B4	76		
SCAN_LED B3	77		
SCAN_LED B2	78		
SCAN_LED B1	79		
SCAN_LED B0	80		
SCAN_STSB3	81		
SCAN_STSB2	82		
SCAN_STSB1	85		
SCAN_STSB0	86		
Port 16_23		I/O	Scan LED pins display for port16~port23 link status.
Scan_LED Group			In Scan LED mode, this LED group display each port's (1) Speed (2) Link/Active (3) Collision/Duplex status without external TTL.
SCAN_LED C5	61		
SCAN_LED C4	62		
SCAN_LED C3	63		
SCAN_LED C2	64		
SCAN_LED C1	65		
SCAN_LED C0	66		
SCAN_STSC3	67		
SCAN_STSC2	68		
SCAN_STSC1	69		
SCAN_STSC0	72		

## 7.6.2. Serial LED Pins

**Table 8. Serial LED Pins**

Pin Name	Pin No.	Type	Description
SLED_CLK (SCAN_STSA0)	100	O	<p>Serial LED Shift Clock.</p> <p>In Serial LED mode, when Serial LED mode is enabled, periodically active to enable SLED_DATA to shift into the external shift register.</p>
SLED_DATA (SCAN_STSA1)	99	O	<p>Serial LED Data Output.</p> <p>In Serial LED mode, when Serial LED mode is enabled, serial LED data is shifted out when SLED_CLK is active.</p>
SLED_DMODE_CLK (SCAN_STSA2)	98	I	<p>Serial LED Diagnostic Mode Item Select Control Pulse Input.</p> <p>This is an external signal pulse input signal for diagnostic item selection. The diagnostic LED display item will change whenever there is a signal pulse clock input on this pin.</p> <p>The diagnostic items list and its display sequence is as follows:</p> <ul style="list-style-type: none"> <li>(1) DisablePort/RxError (active low)           <ul style="list-style-type: none"> <li>On: Port disabled</li> <li>Blinking: Error Packet Received (includes dropped packets)</li> </ul> </li> <li>(2) FlowControl/FCActive (active low)           <ul style="list-style-type: none"> <li>On: Flow control ability enabled</li> <li>Blinking: Congestion flow control active</li> </ul> </li> <li>(3) TrunkPort/TKFault (active low)           <ul style="list-style-type: none"> <li>On: Trunk Port</li> <li>Blinking: Trunk link fault port</li> </ul> </li> <li>(4) HighPriorityPort (active low)           <ul style="list-style-type: none"> <li>On: High priority port</li> </ul> </li> <li>(5) LoopDetectPort (active low)           <ul style="list-style-type: none"> <li>On: Loop event detected.</li> </ul> </li> <li>(6) BroadcastStormAlarmPort (active low)           <ul style="list-style-type: none"> <li>On: Broadcast Storm detected</li> </ul> </li> <li>(7) Reserved</li> <li>(8) Reserved</li> </ul>

Pin Name	Pin No.	Type	Description
LED_EnTRUNK#0 (SCAN_STSA3)	95	O	Trunk Port Enabled LED output. 0 (On): Trunk Enabled 1 (Off): Trunk Disabled.
LED_EnTRUNK#1 (SCAN_LED A0)	94		The LED blinks to indicate that there is a trunk member port link down. For Serial LED Mode: act as Trunk 0 (port 0~3) Enable LED.
LED_EnTRUNK#2 (SCAN_LED A1)	93		For Serial LED Mode: act as Trunk 1 (port 4~7) Enable LED.
LED_EnTRUNK#3 (SCAN_LED A2)	92		For Serial LED Mode: act as Trunk 2 (port 8~11) Enable LED.
LED_EnTRUNK#4 (SCAN_STSB0)	86		For Serial LED Mode: act as Trunk 3 (port 12~15) Enable LED.
LED_EnTRUNK#5 (SCAN_STSB2)	82		For Serial LED Mode: act as Trunk 4 (port 16~20) Enable LED.
LED_Loop_Det (SCAN_STSB1)	85	O	For Serial LED mode: act as Loop detect for global port. Loop Detect LED output. 0: Loop detected 1: Loop not detected

## 7.7. Power/Ground Pins

**Table 9. Power/Ground Pins**

Pin Name	Pin No	Type	Description
DVDD	10, 14 25, 32 43, 54 60, 71 83, 96, 112, 128	3.3V(I)	3.3V for I/O digital power.
DGND	1, 26 33, 44 55, 70 97, 113	GND	GND for I/O.
RVDD	15 19	3.3V(I)	3.3V for internal 3.3V to 1.8V regular power input.
VDD	16, 35 50, 73 90, 114	1.8V(I)	1.8V input for internal test used. Do not supply 1.8V if RVDD is used.
GND	18, 36 74, 91 115	GND	GND for Core power.
VCTRL	17	1.8V(o)	Voltage control: This pin controls a PNP transistor to generate the 1.8V power supply for VDD pins. Normally keep this pin floating.
AVDD	59	3.3V(I)	3.3V for PLL power.
AVSS	58	GND	GND for PLL.

## 7.8. Test Pins

**Table 10. Test Pins**

Pin Name	Pin No.	Type	Description
EnTESTMODE	84	I/O (Pd)	Test pin. Normally not pulled up or down.
MS_Test[1]	41	I/O (P-Up)	Must use 1K resistor to pull up to 3.3V.
GAN_Test (SYNC_0_7)	118	I/O	Must use 1K resistor to pull up to 3.3V.
OPCLK2 (P0TXD)	106	I/O (P-down)	Test pin. Normally not pulled up or down.
OPCLK1 (P1TXD)	108	I/O (P-down)	Test pin. Normally not pulled up or down.
OPCLK0 (P2TXD)	110	I/O (P-down)	Test pin. Normally not pulled up or down.

## 8. Functional Description

### 8.1. Reset

#### 8.1.1. Hardware Reset

In a power-on reset, an internal power-on reset pulse (44ms) will be generated and the RTL8324P will start the reset initialization procedures. These are:

- Determine various default settings via the hardware strap pins at the end of the RST# signal
- Auto load the configuration from EEPROM if EEPROM is detected (approx. 10ms)
- Complete the embedded SSRAM BIST process (approx. 24 ms)
- Initialize the packet buffer descriptor allocation
- Initialize the internal registers and prepare them to be accessed by the serial CPU interface
- Start MDC/MDIO configuration and polling

*Note 1: To guarantee register access is valid and correct, the RTL8324P registers should not be accessed before the reset initialization process is finished.*

*Note 2: The connected PHY should have completed the reset process before the RTL8324P starts the MDC/MDIO configuration and polling process.*

#### 8.1.2. Software Reset

The software reset command resets the system control circuit and restarts auto-negotiation. It keeps the user configured settings. Hardware pin strapping, EEPROM auto load, and SSRAM BIST are NOT done when using the software reset command.

### 8.2. MAC to PHY Interface

The MAC to PHY interface supports SMII for all ports.

### ***8.3. Fast Ethernet Port (SMII Interface)***

Ports 0~23 are 10/100M Fast Ethernet ports supporting a Serial Media Independent Interface (SMII). The RTL8324P provides three SMII synchronous 125MHz clock outputs for three octal PHYs.

### ***8.4. MAC Address Table Search and Learning***

The RTL8324P MAC address lookup table consists of an 8K-entry hash table and 64-entry Content Addressable Memory (CAM). The RTL8324P uses the last 13 bits of the MAC address to index the 8K-entry lookup table for address searching and learning. If the mapped location in the 8K entries is occupied, then the RTL8324P will compare the destination MAC address with the contents of the CAM for address searching, and store the source MAC address in the CAM for address learning. The 64-entry CAM helps avoid address hash collisions and improves switch performance.

### ***8.5. MAC Table Aging Function***

In a dynamic network topology, address aging allows the contents of the address table to always be the most recent and correct. A learned source address entry will be cleared (aged out) if it is not updated by the address learning process within a set aging time period. The default aging timer of the MAC address lookup table is between 200 ~ 300 seconds.

### ***8.6. Illegal Frame Filtering***

Illegal frames such as CRC error packets, runt packets (length < 64 bytes) and oversize packets (length > maximum length) will be discarded. The maximum packet length may be 1536 or 1552 bytes.

This function is controlled by register 0x0001 [1:0].

Hardware Strapping Pin: MaxPKLen (87).

### ***8.7. IEEE 802.1D Reserved Group Addresses Filtering Control***

The RTL8324P supports the ability to drop 802.1D specified reserved group MAC addresses: 01-80-C2-00-00-04 to 01-80-C2-00-00-0F. The default setting disables dropping of these reserved group MAC address control frames. Frames with group MAC address 01-80-C2-00-00-01 (802.3x Pause), 01-80-c2-00-00-02 (802.3ad LACP) will always be filtered. MAC address 01-80-C2-00-00-03 is not filtered.

This function is controlled by register 0x0300 [2].

Hardware Strapping Pin: EnCtrlFFilter (88).

## ***8.8. Backoff Algorithm***

The RTL8324P implements the truncated exponential backoff algorithm compliant with the IEEE 802.3 standard. The collision counter is restarted after 16 consecutive collisions.

## ***8.9. Inter-Packet Gap***

The Inter-Packet Gap is 9.6 $\mu$ s for 10Mbps Ethernet, 960ns for 100Mbps Fast Ethernet.

The RTL8324P supports Transmit Inter-Packet Gap compensation for the frequency shift tolerance of the on-board oscillator.

This function is controlled by register 0x0001 [2].

## ***8.10. Buffer Management***

An embedded 1.25Mbit SSRAM is built-in as a packet storage buffer. To efficiently utilize the packet buffer, the RTL8324P divides the SSRAM into 1280 x 128-byte page-based buffers that are linked by a descriptor link list. For an Ethernet packet, a minimum of one, and maximum of 12 pages can be used. The system supports non-blocking wire-speed switching via 24 10/100M ports.

## ***8.11. Flow Control***

The RTL8324P supports IEEE 802.3x full-duplex flow control, and half-duplex back pressure congestion control.

### ***8.11.1. IEEE 802.3x Pause Flow Control***

IEEE 802.3x flow control is auto-negotiated between the remote device and the RTL8324P by writing the flow control ability, via MDIO, to an external connected PHY.

If a good PAUSE frame is received from any PAUSE flow-control-enabled port with DA=0180C2000001, the corresponding port of the RTL8324P will stop its packet transmission until a PAUSE timer timeout, or another PAUSE frame with zero PAUSE time is received.

The maximum transmitted Pause frame count during a congestion event is controllable. (1) limited to a 128 count (2) unlimited count. The limited count is used to avoid unexpectedly long pause time locks for some network topology traffic.

This function is controlled by register 0x0001 [3].

Hardware Strapping Pin: MaxPauseCnt (79).

### **8.11.2. Half Duplex Back Pressure Flow Control**

The RTL8324P supports two back pressure flow control schemes to force incoming packet backoff when the switch destination port is congested. This back pressure mode is controlled by register 0x0001 [7] and Hardware Strapping Pin: EnCOLBKPMode (119).

**Collision-based back pressure:** Uses a 4-byte jam pattern to force collisions with each incoming packet to force the link partner to back off transmissions according to CSMA/CD until the destination port congestion event is cleared. The RTL8324P uses a special half-duplex back pressure design; after 48 forced collisions it unconditionally receives and forwards one packet successfully. This prevents the connected repeater from being partitioned due to excessive collisions.

**Carrier-sense-based back pressure:** When a congested event is asserted, the RTL8324P continuously sends 4k jam packets with a minimum Inter-Packet Gap to prevent the link partner from transmitting more packets.

### **8.12. Broadcast Storm Filtering Control**

The Broadcast Storm Filtering Control function enables each port to drop broadcast packets (Destination MAC ID is ‘ff ff ff ff ff ff’) after a ***continuous received broadcast packets counter*** count of 64. The counter is reset to 0 every 800ms or when receiving non-broadcast packets (Destination MAC ID is not ‘ff ff ff ff ff ff’).

This Broadcast Storm Filtering Control function is controlled by register 0x0607 [4].

Hardware Strapping Pin: EnBRDCTRL (11).

### **8.13. Head-Of-Line Blocking Prevention**

The RTL8324P incorporates a simple mechanism to prevent Head-Of-Line blocking problems when flow control is disabled. When the flow control function is disabled, the RTL8324P first checks the destination address of an incoming packet. If the destination port is congested, then the RTL8324P discards this packet to avoid blocking following packets destined for a non-congested port.

## **8.14. Port Trunking and Fault Recovery Support**

Port Trunking is the ability to aggregate several 10/100Mbps ports into a single logical link. There are 6 trunk groups supported by the RTL8324P. They are identified as:

Trunk 0: (Port 0, 1, 2, 3)

Trunk 1: (Port 4, 5, 6, 7)

Trunk 2: (Port 8, 9, 10, 11)

Trunk 3: (Port 12, 13, 14, 15)

Trunk 4: (Port 16, 17, 18, 19)

Trunk 5: (Port 20, 21, 22, 23)

They are individually enabled by Register 0x0307[6:1], EnTrunk[5:0] during hardware reset. Each trunk supports a trunking port status LED. The LED will be active low when the trunking function is enabled.

The RTL8324P trunking port always sends packets over the same link path in the trunk with a given source and destination MAC address to prevent frames from getting out of order, but the reverse path may follow a different link.

### **8.14.1. Load Balancing**

The load balancing scheme between links in a trunk group is determined by an Index[2:0] value that is calculated by a DA and SA hash algorithm.

Mapping algorithm. Given a number between 8 values of Index[2:0]:

If link up port is 4. Index value {(7, 6), (5, 4), (3, 2), (1, 0)} maps to LinkUpPort[3:0]

If link up port is 3. Index value {(7, 6, 5), (4, 3, 2), (1, 0)} maps to LinkUpPort[2:0]

If link up port is 2. Index value {(7, 6, 5, 4), (3, 2, 1, 0)} maps to LinkUpPort[1:0]

If link up port is 1. Index value {(7, 6, 5, 4, 3, 2, 1, 0)} maps to LinkUpPort[0]

### **8.14.2. Trunk Fault Auto Recovery**

If a physical port of a trunk group is link down, then the EnTrunkLED will blink to warn of a link-down fault event. The Fault flag will be reported on register 0x0102 (System Fault Indication Register).

The RTL8324P will auto-start the Auto Fault Recovery scheme to distribute the trunk load to the remaining link up ports.

## 8.15. *IGMP Snooping Support*

The RTL8324P supports ASIC-based IGMP (Internet Group Management Protocol) snooping. This can be enabled via register 0x0308[0]. No other external CPU handling is required. It supports the ability to parse the IGMP control protocol packets and IP multicast data packets and learn the multicast router port and group address member ports into the multicast address table.

The RTL8324P differentiates between IGMP control protocol packets according to the message type:

- Router protocol packets (IGMP query packets and multicast routing protocol packets) are broadcast to all ports
- Group member protocol packets (IGMP v1, v2, Report and Leave packets) are sent directly to multicast router ports

IP multicast data packets involve multicast group table lookup and forwarding operations. If the table lookup returns a hit, the data packet is forwarded to all member ports and router ports. If the multicast address is not stored in the address table (i.e. lookup miss), the packet is broadcast to all ports of the broadcast domain.

The multicast table is combined with a L2 MAC table with a maximum of 8k entries. For a given multicast entry, the valid port member bit will auto age out after about 5 minutes if the port does not receive a corresponding group address IGMP report packet.

## 8.16. *VLAN Function*

The RTL8324P supports a VLAN function to segregate the switch into 32 VLANs. Each VLAN is a broadcast domain and each VLAN may be flexibly configured from 0 to 24 port members. Both port-based and tag-based VLAN functions are supported. The PVID, Tagging Control, and Ingress/Egress rules are manually configured on the VLAN Table at registers 0x030B~0x037C. The VLAN table format is shown as follows:

**Table 11. VLAN Table Format**

VLAN Entry Index	VID (12-Bit)	Port Member Set (26-bit Bitmap)
0		
1		
2		
:		
31		

'VID' defines the 802.1Q VLAN ID. The value of 'VID' must NOT be '0x000' or '0xffff'.

A VLAN is used to divide the broadcast domain to cut broadcast scope. The VLAN Frame Forwarding Rules are defined as follows:

- A received broadcast/multicast frame will be flood forwarded to VLAN member ports only ('Port Member Set' in the VLAN table) of the VLAN except the source port.
- A received unicast frame will be forwarded to its destination port only if the destination port is in the same VLAN as the source port. If the destination port belongs to a different VLAN, the frame will be discarded unless Leaky VLAN control is enabled.
- All VLAN groups share the same layer-2 learned MAC address table (Shared Learning).

### **8.16.1. Port-Based VLAN**

By setting the 0x030B register to disable the En8021Qaware control bit, port-based VLAN is enabled and 802.1Q VLAN tagging is ignored. All other VLAN table configurations are the same as tag-based VLAN functions. The VLAN classification of an incoming packet on a port-based VLAN is defined by the port PVID. The RTL8324P uses the Port VLAN Identifier (PVID) to search the VLAN table for the VLAN member.

### **8.16.2. IEEE 802.1Q Tag-Based VLAN**

By setting the 0x030B register to enable the En8021Qaware control bit, 802.1Q tag-based VLAN is enabled.

VLAN classification is the first step before VLAN table lookup. The method of assigning a unique VID value to a received packet is as follows:

1. For a VLAN-tagged packet.
  - If the tagged 12-bit VID != 0, then the tagged VID value is used.
  - If the tagged VID = 0 (Null VID, priority tag), then the port's PVID value is used.
2. For a non-VLAN-tagged packet, the port's 12-bit PVID value is used.

*Note: The 'insert PVID' function for non-VLAN-tagged packets is controlled by registers 0x037D~0x037E.*

After a unique 12-bit VID is assigned, the RTL8324P checks the VLAN table ingress/egress rule, and then forwards the packet to valid destination ports.

### **8.16.3. Ingress/Egress Filtering Control Parameters**

Two VLAN filtering rule control parameters are provided on register 0x030B:

- Acceptable frame type control: Admits all frames or admits only VLAN-tagged frames
- Ingress filtering control: Enables filtering of frames received from a port that is not in this port's VLAN group

## 8.16.4. Leaky VLAN

The Leaky VLAN feature enables specific frames to be forwarded between different VLANs.

For example, if the VLAN table entry is:

VLAN 1: Port members = {Port 1, 2, 3}

VLAN 2: Port members = {Port 4, 5, 6}

Normally, broadcast, multicast, and unicast packets are not allowed to be switched between these two VLANs. Port 1 broadcast packets will only flood to Port 2 and 3. A Port 1 unicast packet is not allowed to be forwarded to a member of VLAN 2.

If the Leaky VLAN function is enabled, three types of packets may be forwarded to destination ports outside the current VLAN.

1. Unicast Packet: May be forwarded to a destination port (L2 table lookup hit) on a different VLAN
2. ARP Broadcast Packet: May be broadcast to all ports on a switch
3. IP Multicast Packet: May be flooded to all the multicast address group member set, ignoring the VLAN member set domain limitation

These types of leaky control are used when:

- A switch is divided into multiple VLANs and host to host communication is required between the different VLANs without using a router
- You want to improve router performance

## 8.16.5. Insert/Remove VLAN Priority Tag

The RTL8324P supports Output Priority tagging control via register set 0x0319~0x031B. There are four types of VLAN tagging:

1. Remove the VLAN tag from all tagged packets
2. Insert a priority tag into untagged high-priority packets (Set priority field: 7, VID field: 0 for high priority packets)
3. Insert a priority tag into all untagged packets  
(Set priority field: 7, VID field: 0 for high priority packet. Set priority field: 0, VID field: 0 for low priority packets)
4. Don't touch (No modification made to the packet)

*Note: This function may be enabled whether the VLAN function is enabled or not.*

## **8.17. QoS Function**

The RTL8324P can recognize QoS priority information in an incoming packet and send the packet to different priority queues for different service priority. The RTL8324P identifies the packet's priority based on three types of QoS priority information:

- Port-based priority
- IEEE 802.1p/Q VLAN tag
- TCP/IP TOS/DiffServ (DS) priority field

These three types of QoS can be configured via hardware pins, EEPROM, or Registers 0x0400 ~ 0x0402.

The RTL8324P supports two priority level queues. The queue service rate is based on the Weighted Round Robin algorithm. The packet-based service weight ratio of high-priority and low-priority queuing can be set to 4:1, 8:1, 16:1 or 'Always high priority first'.

### **8.17.1. Port-Based Priority**

When port-based priority is applied, any packet received from a high priority port will be treated as a high priority packet.

### **8.17.2. IEEE 802.1p/Q Based Priority**

When 802.1p tag priority is applied, the RTL8324P recognizes 802.1Q VLAN tagged packets and extracts the 3-bit User Priority information from the VLAN tag. The RTL8324P sets the User Priority threshold to 3. VLAN tagged packets with User Priority values 4~7 are treated as high priority packets, and other User Priority values (0~3) as low priority packets (follows the IEEE 802.1p standard).

### 8.17.3. Differentiated Services Based Priority

When TCP/IP's TOS/DiffServ (DS) based priority is applied, the RTL8324P recognizes TCP/IP Differentiated Services Codepoint (DSCP) priority information from the DS-field defined in RFC2474. The DS field byte for IPv4 is the Type-of-Service (TOS) octet. Recommended DiffServ Codepoints are defined in RFC2597 for classifying traffic into different service classes. The RTL8324P extracts the codepoint value of the DS field from IPv4 packets and identifies the priority of the incoming IP packet following the definitions listed below:

High Priority. DS-field = 101110 (EF, Expected Forwarding)

001010; 010010; 011010; 100010 (AF, Assured Forwarding)

11x000 (Network Control)

Low Priority. DS-field = Other values

VLAN tagged packet formats are shown below:

6 bytes	6 bytes	2 bytes	3 bits	1 bit	12 bits		4 bytes
DA	SA	81-00	User Priority (0~3: Low-pri; 4~7: High-pri)	CFI	VLAN Identifier	Data	CRC

**Figure 4. 802.1Q VLAN Tag Frame Format**

6 bytes	6 bytes	4 bytes	2 bytes	4 bits	4 bits	6 bits	2 bits		4 bytes
DA	SA	802.1Q Tag (Optional)	08-00	Version IPv4: 0100	IHL	TOS[0:5]: DS-field	----	Data	CRC

**Figure 5. IPv4 Frame Format**

### 8.17.4. Flow Control Auto Turn Off

The RTL8324P can automatically turn off IEEE 802.3x flow control and back pressure flow control for 1~2 seconds whenever the port receives a high priority packet. Flow control is re-enabled when no priority packets are received for 1~2 seconds. This auto-turn off function is enabled via Register 0x0400[2].

## 8.18. Ingress and Egress Bandwidth Control

The RTL8324P supports bandwidth control on all ports. Each port's bandwidth is configurable on both ingress and egress traffic independently. Port bandwidth may be configured to 128kbps, 256kbps, 512kbps, 1Mbps, 2Mbps, 4Mbps, or 8Mbps.

When the ingress or egress traffic bandwidth exceeds the configured threshold, flow control is triggered to limit the throughput. The control description is shown in register 0x020A ~0x0215.

## 8.19. Simple MIB Counter Support

Three 32-bit MIB counters (Counter 1, Counter 2, and Counter 3) are implemented on each port for basic traffic management and diagnostic purposes.

The MIB object of each counter is configurable. The MIB object selection on each counter is shown in Table 12. A detailed description is given in 10.8 MIB Counter Register, page 59.

**Table 12. MIB Object Selection**

MIB Object	Counter 1	Counter 2	Counter 3
RX Packet Count	V	-	-
RX Byte Count	V	-	-
TX Packet Count	-	V	-
TX Byte Count	-	V	-
Drop Packet Count	-	-	V
Drop Byte Count	-	-	V
CRC Error Packet Count	V	V	V
Collision Count	V	V	V

## 8.20. Realtek Remote Control Protocol

The Realtek Remote Control Protocol (RRCP<sup>®</sup>) is a Realtek proprietary simple and easy device management program that is implemented for in-band remote control purposes.

The protocol is hardware ASIC-based and does not require an external CPU. It allows the system administrator to get/set the switch configuration, to read the statistic counters, and to find RRCP aware devices.

The Remote Management Tool (RMT) software package is bundled with the RTL8324P. The RMT is a Windows-based tool developed to enhance the functionality of Realtek's dumb layer 2 switches via software. The RMT gives network administrators the ability to remotely configure and monitor dumb layer 2 switches as though they were intelligent switches.

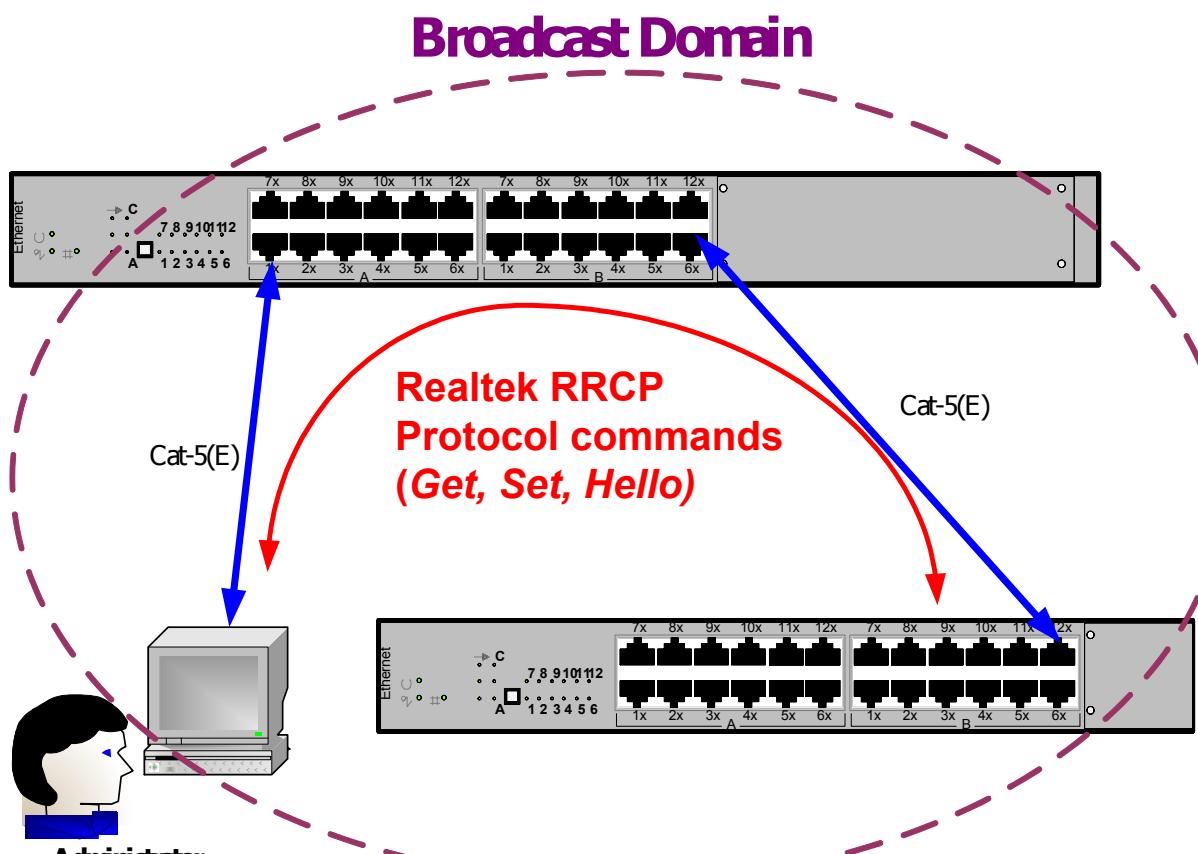


Figure 6. Realtek Remote Control Protocol

### **8.20.1. RRCP® Capabilities**

The RRCP is limited to the same network domain.

The RRCP supports the following:

1. Network Topology Discovery
2. Get/Set Configuration value of Register
3. Security Management by an Authentication Key and management port setting

Operation commands are:

Management Operation      (1) register Get  
                                  (2) register Set  
                                  (3) Hello

Switch Operation      (1) register Get Reply  
                                  (2) Hello Reply

The Hello Reply packet reports the switch's link vector information back to the manager (Downlink MAC, Downlink Port), (Uplink MAC, Uplink Port). The link vector information enables discovery of the network topology.

### **8.20.2. Management Security Scheme**

Two RRCP security schemes are implemented:

#### **RRCP Management Authorized Port Control**

An authorized port can be configured via registers 0x0201~0x0202. Only RRCP packets originating from an authorized port will be processed and responded to. Other RRCP with DA=switch's MAC address will be dropped.

#### **Protocol Authentication Key control**

Each RRCP packet must contain the Authentication Key defined in the register 0x0209. After powering on, the Authentication Key is reset to the default value (0x2379). It can be updated through a valid RRCP Set command or through a Serial CPU interface.

### 8.20.3. RRCP® Protocol Packet Format

#### Hello/Get/Set/Get\_Reply Packet Format

**Table 13. Hello/Get/Set/Get\_Reply Packet Format**

0	8	16	24 ~ 32			
DA (6)						
DA		SA (6)				
SA						
RealtekEtherType (2)	Protocol (1)	r	OP Code (7bit)			
Authentication Key (2)	Register Address (2)					
Register Data (4)						
Reserved (4)						
Reserved (4)						
Pad 00						
:						
:						
CRC (4)						

#### Hello/Get/Set/Get\_Reply Packet Format Description

**Table 14. Hello/Get/Set/Get\_Reply Packet Format Description**

Field	Length	Description	Value
DA	6B	Destination MAC Address. -For a Get, Set packet, this is the unicast address of a switch. -For a Get_Reply packet, this is the unicast address of the management station. -For a Hello packet, this can be the unicast address of a switch or a broadcast address to all RRCP aware switches. <i>Note: If the Authentication Key register has been updated after power on, the switch will only respond to a unicast Hello packet.</i>	--
SA	6B	Source MAC address.	--
RealtekEtherType	2B	Identifies the packet as a Realtek Remote Control packet. The EtherType value=0x8899.	0x8899
Protocol	1B	Realtek Proprietary protocol type definition. 01: Realtek Remote Control Protocol Others: Reserved	01h
OP Code	7bit	Operation Code (7bit). Code definition: 00: Hello packet 01: Get configuration 02: Set configuration	--

Field	Length	Description	Value
r	1 bit	Reply flag. On receiving a control packet reply from the switch to the management station, this flag will be set to 1. Otherwise, this bit should be 0.	Station to switch: 0 Switch to station: 1
Authentication Key	2B	Authentication Key. Used for security of the management operation. The Key value can be modified by the administrator via a remote control packet. A received control packet with a valid Destination MAC address but with an unmatched authentication key will be dropped with no reply. If the DA is a broadcast address or is the address of another switch, it will still be relayed.	Default: 0x2379
Register Address	2B	Register address of the configuration.	--
Register Data	4B	Register data of the configuration.	--

### Hello\_Reply Packet Format

**Table 15. Hello\_Reply Packet Format**

0	8	16	24 ~ 32		
DA (6)					
DA		SA (6)			
SA (=Downlink MAC)					
RealtekEtherType (2)	Protocol (1)	r	OP Code (7bit)		
Authentication Key (2)	Downlink Port (1)	Uplink Port (1)			
Uplink MAC (6)					
Uplink MAC		Chip ID (2)			
Vender ID (4)					
Pad 00					
:					
:					
CRC (4)					

## Hello\_Reply Packet Format Description

**Table 16. Hello\_Reply Packet Format Description**

Field	Length	Description	Default
Downlink Port	1B	Downlink Port number of the link vector. Indicates the port number on the Hello Reply switch that is connected to the Uplink switch. This is set by the Hello reply switch.	--
Uplink Port	1B	Uplink Port number of the link vector. Indicates the port number of the Uplink switch that is connected to the Hello reply switch. This is set by the Uplink switch.	00h Updated by the Uplink_MAC switch
Uplink MAC	6B	The MAC address of the Uplink switch. The default value is 000000000000h and is updated by the Uplink switch. When a switch receives a Hello_Reply frame with zero UplinkMAC, then it will enter the SA MAC address here.	0
Chip ID	2B	Realtek Chip ID. This is set by the Hello_Reply switch. Each Realtek switch controller that is aware of the RRCP has a unique Chip ID (see 11.3.7 0x0206H: Chip Model ID, page 70).	EEPROM
Vender ID	4B	Vender ID. This is set by the Hello_Reply switch. The 4-byte vender ID is reserved for the system vender to configure its company name or the device model ID.	EEPROM

## 8.21. Network Loop Connection Fault Detection

The RTL8324P periodically transmits a Realtek-EtherType (=0x8899) protocol frame to detect network loop faults.

- Normal transmission time interval is five minutes
- If a port detects a loop, the loop event flag will be set (register 0x0101) and the transmission time interval will change to one second to speed up the new topology change detection
- The loop event flag will be cleared and the transmission time interval will return to five minutes if the port does not receive a self-loop detect packet for 3 seconds

### Loop Detect Packet Format

The Loop Detect Packet Format is shown below:

**Table 17. Loop Detect Packet Format**

0	8	16	24	~	32				
DA (6) [=0xffffffffffff]									
DA		SA (6)[=Switch MAC]							
SA									
RealtekEtherType (2) [=0x8899]		Protocol (1) [=03]		Pad 0000					
Pad 00000000									
:									
:									
CRC (4)									

## 8.22. Realtek Echo Protocol

The Realtek Echo Protocol (REP) supports the Layer 2 Echo test. It is easy for a host to do network connection diagnostics through a simple test packet, with or without other hosts on the network. No IP assignment is required.

When the RTL8324P receives a REP packet, it replies by sending the original REP frame to the source MAC address with the DA and SA exchanged.

### Realtek Echo Protocol Frame

The REP frame format is shown below:

0	8	16	24	~	32
DA (6) [=0xffffffffffff]					
DA		SA (6)[=Switch MAC]			
SA					
RealtekEtherType (2) [=0x8899]		Protocol (1) [=02]		Pad 0000	
Pad 00000000					
:					
:					
CRC (4)					

Figure 7. Realtek Echo Protocol Frame

## 8.23. Disable Port

A port can be disabled via the Port Disable Control Register (register 0x0608~0x0609). When a port is disabled, the port will cease all packet transmission and reception except for Realtek Remote Control Protocol (RRCP) packets. The physical link status is not changed.

## 8.24. Port Properties Configuration

The RTL8324P supports a flexible method to configure port properties via the PHY MII register. Configurable properties include Media Speed (10M/100M), Duplex Mode, and 802.3x PAUSE flow control. The properties of each can be configured by auto-negotiation or forced mode (auto negotiation disabled).

The port link state will be reported in the port Link Status register. The configuration description is shown in registers 0x060A ~ 0x0624.

The following shows how to configure the Pause and Asymmetric Pause ability on port property registers (0x060A~0x0615) to get an expected negotiation result.

Table 18. Configuring Pause and Asymmetric Pause

PAUSE	Asymmetric PAUSE	Expected PAUSE Result
0	0	Disable
0	1	Asymmetric to Link Partner
1	0	Symmetric(Default)
1	1	Asymmetric to Link Local or Symmetric


When a port is configured to ‘Forced Mode’ (auto negotiation disabled), the following table shows how to configure flow control ability (TX pause/RX pause) on port property registers (0x060A~0x0615) to get an expected negotiation result.

**Table 19. TX/RX Pause Ability in Forced Mode**

(0x060A~0x0615) bit[6] Asymmetric PAUSE	(0x060A~0x0615) bit[5] Asymmetric PAUSE	RTL8324P Flow Control Ability
0	0	RX pause ability only
0	1	No Flow Control ability
1	0	TX pause ability only
1	1	Both TX/RX pause ability

## 8.25. Serial CPU Interface

The RTL8324P supports a serial CPU interface (Slave mode) that shares the same hardware pin (SCK, SDA) as the EEPROM interface (Master mode). The EEPROM and Serial interface can coexist by assigning a different device ID. Define EEPROM device ID=1010-000, RTL8324P device ID=1010-100. The interface is compatible with EEPROM 24LC08.

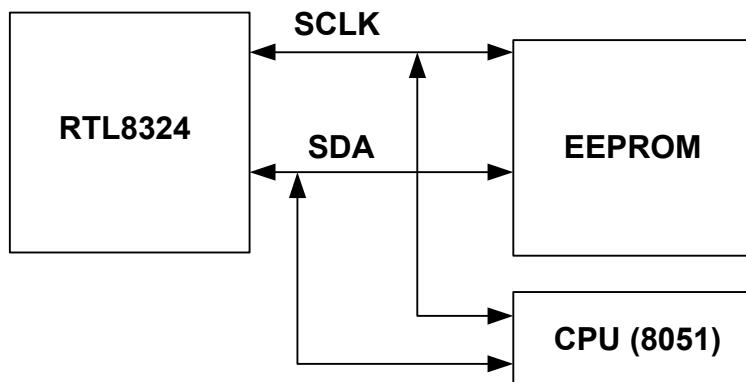

**Figure 8. Serial CPU Interface**

The serial CPU interface is enabled after the EEPROM download has finished. When operating in serial CPU mode the SCK is an input pin. The SDA is an IO pin with internal pull high.

### 8.25.1. Serial-CPU Access Format

In Serial CPU mode, 16-bit and 32-bit data access are both supported by the RTL8324P. The Serial Read Write access format is as follows.


- 16-bit Address (MSB first)
- 16/32-bit data Burst Read (Low byte (Byte0) first; MSB first)
- 16/32-bit data Burst Write (Low byte (Byte0) first; MSB first)

*Note: Each burst is one byte.*

### Start and Stop Definition (START; STOP)

A high-to-low transition of SDA with SCLK high is a START condition and it must precede any other command.

A low-to-high transition of the SDA line while the clock (SCLK) is HIGH determines a STOP condition. All operations must end with a STOP.

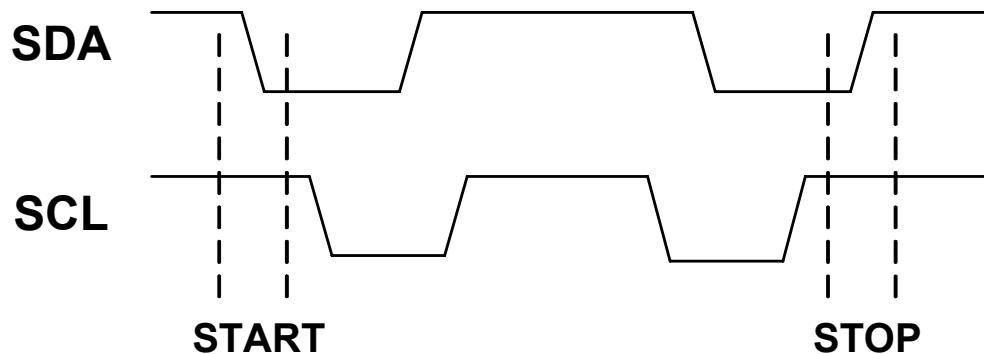


**Figure 9. Start and Stop Definition**

### Output Acknowledge (ACK)

When addressed, each receiving device is obliged to generate an acknowledgment after reception of each byte.

The master device must generate an extra clock pulse that is associated with this acknowledgement bit.

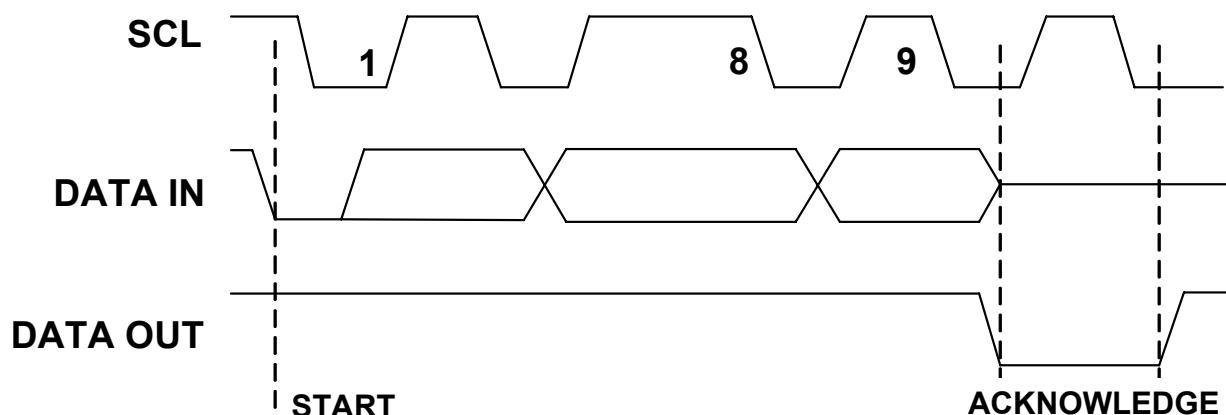

**Figure 10. Output Acknowledge (ACK)**

## Data Valid

The state of the data line represents valid data when, after a START condition, the data line is stable for the duration of the HIGH period of the clock signal.

The data on the line must be changed during the LOW period of the clock signal. There is one clock pulse per bit of data.

## Serial CPU 16-Bit Read/Write Format

**Table 20. Serial CPU 16-Bit Read/Write Format**

Bit Width	1	4	3	1	1	8	1	8	1	8	1	8	1	1	1
Operation	Start Bit	Control code	Chip Select	RW	Ack	Reg. Addr. [7:0] (MSB first)	Ack	Reg. Addr. [15:8] (MSB first)	Ack	Reg. Data. [7:0] (MSB first)	Ack	Reg. Data. [15:8] (MSB first)	Ack	Stop Bit	
16-bit Read	Start	1010		100	1	0 (*A)	Write Data	0 (*A)	Write Data	0 (*A)	Read Data	0 (*B)	Read Data	1 (*B)	Stop
16-bit Write	Start	1010		100	0	0 (*A)	Write Data	0 (*A)	Write Data	0 (*A)	Write Data	0 (*A)	Write Data	1 (*A)	Stop

Note: \*A = ACK by RTL8324P. \*B = ACK by CPU

## Serial CPU 32-Bit Read Format

**Table 21. Serial CPU 32-Bit Read Format**

Bit Width	1	4	3	1	1	8	1	8	1	8	1	8	1	8	1	1	1		
Operation	Start Bit	Control Code	Chip Select	R W	Ack	Reg. Addr. [7:0] (MSB first)	Ack	Reg. Addr. [15:8] (MSB first)	Ack	Reg. Data. [7:0] (MSB first)	Ack	Reg. Data. [15:8] (MSB first)	Ack	Reg. Data. [23:16] (MSB first)	Ack	Reg. Data. [31:24] (MSB first)	Ack	Stop Bit	
32-bit Read	Start	1010		100	1	0 (*A)	Write Data	0 (*A)	Write Data	0 (*A)	Read Data	0 (*B)	Read Data	0 (*B)	Read Data	0 (*B)	Read Data	1 (*B)	Stop

Note: \*A = ACK by RTL8324P. \*B = ACK by CPU

## 8.25.2. EEPROM RW Command Format

The RTL8324P provides a self-Read/Write EEPROM function, which can save and recall user configuration via the Realtek Remote Management Tool (RMT). Read/Write EEPROM function control is via register 0x0217~0x0218.

**Table 22. 0x0217H: EEPROM RW Command Register**

Bits	Name	Description	RW	Default
7:0	EEPROM Address	Assigns EEPROM address bits	RW	0
10:8	CHIP_SEL[2:0]]	Assigns chip selection bits	RW	0
11	Read/Write Operation	0: Write Operation 1: Read Operation	RW	0
12	Status	0: Idle 1: Busy	RW	0
13	Operation Success status	0: Operation Succeeded 1: Operation Failed (Read to Clear)	RW	0
15:14	Reserved			

**Table 23. 0x0218H: EEPROM RW Data Register**

Bits	Name	Description	RW	Default
7:0	WdataEE[7:0]	Data to be written to EEPROM	RW	0
15:8	RdataEE[15:8]	Data Read from EEPROM	R	0

### EEPROM Read/Write Procedure

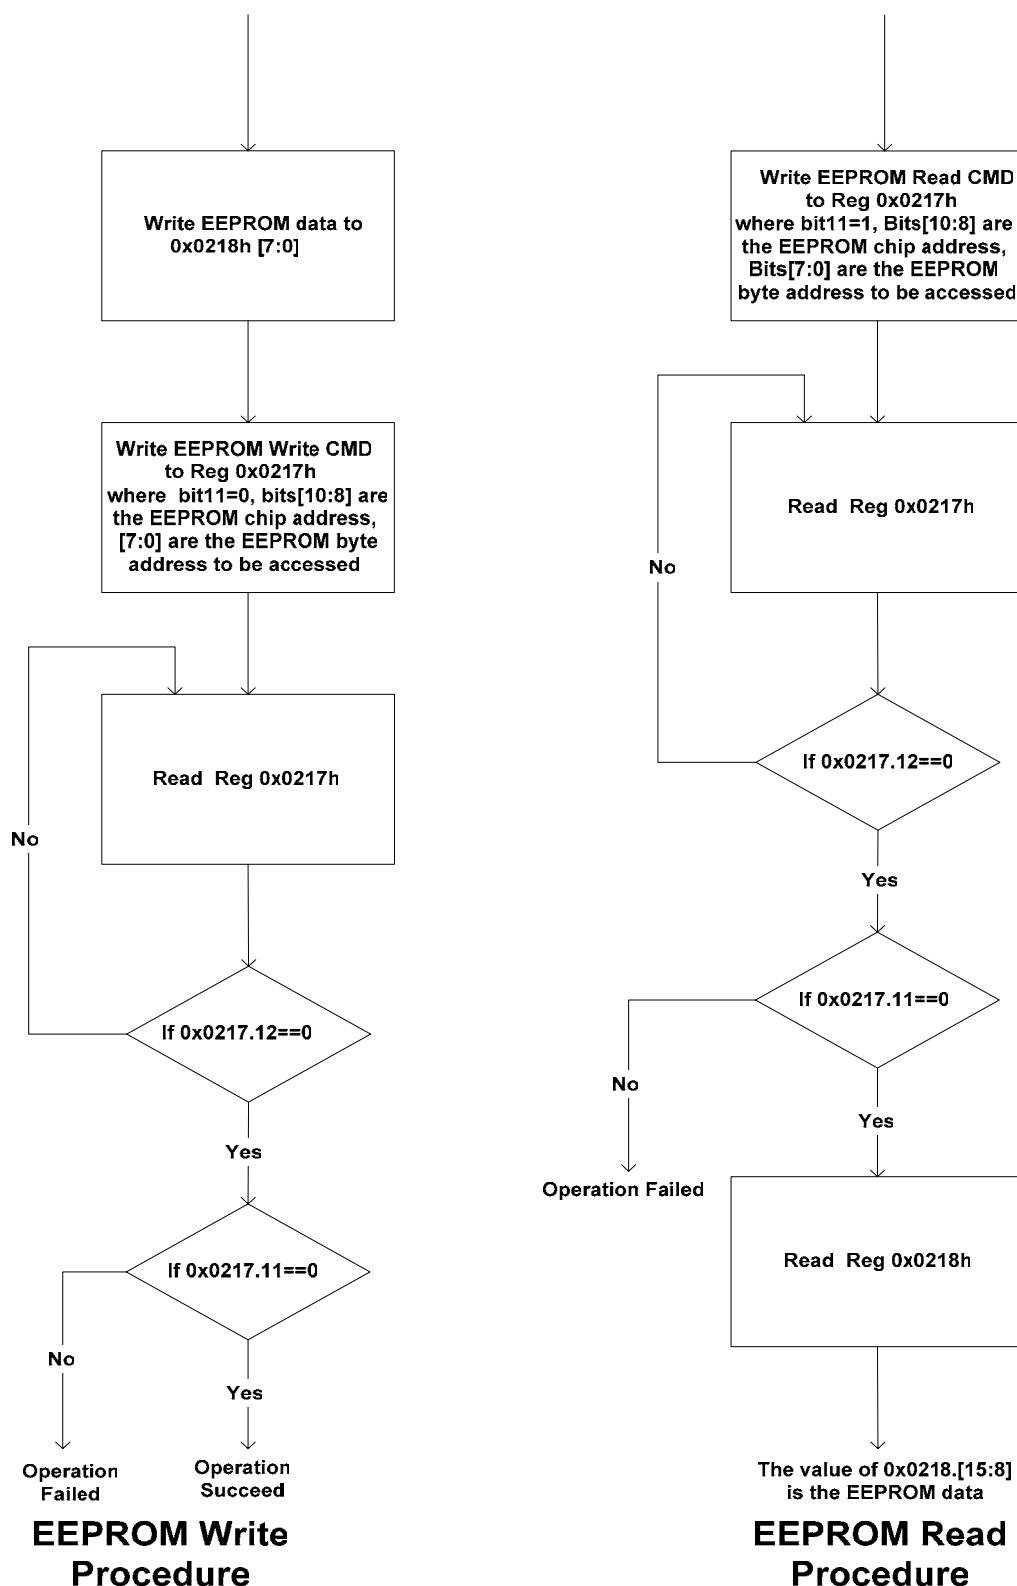


Figure 11. EEPROM Read/Write Procedure

## 8.26. *PHY Serial Management Interface*

The RTL8324P supports PHY management through the serial MDIO and MDC signal (SMI) to start the auto-negotiation process. After a power-on reset, the RTL8324P writes its abilities to the advertisement registers 0, and 4 of the connected PHY and commands the PHY to restart the auto negotiation process. The PHY device address setting is defined as:

Address 16~31 for Fast Ethernet ports 0~15

Address 8~15 for Fast Ethernet ports 16~23

After restarting auto-negotiation, the RTL8324P will continuously read the link status and abilities of local and link partners to determine the link state.

Port properties (speed, duplex, 802.3x flow control) can be configured via auto-negotiation or force mode. The configuration is described in register 0x060A ~ 0x0615. The final link status is reported in register 0x0619~0x0624.

### 8.26.1. **SMI (MDC, MDIO) Interface**

#### **SMI (MDC, MDIO) Management Packet Format**

**Table 24. SMI (MDC, MDIO) Management Packet Format**

Management Frame Fields								<b>IDLE</b>
	<b>PRE</b>	<b>ST</b>	<b>OP</b>	<b>PHYAD</b>	<b>REGAD</b>	<b>TA</b>	<b>DATA</b>	
<b>Read</b>	1...1	01	10	AAAAAA	RRRRR	Z0	DDDDDDDDDDDDDDDDDD	Z
<b>Write</b>	1...1	01	01	AAAAAA	RRRRR	10	DDDDDDDDDDDDDDDDDD	Z

## **8.26.2. PHY Register Indirect Access**

The RTL8324P supports the ability to randomly access the PHY register through a set of control registers at 0x0500~0x0502. Users need to define the PHY address ID, PHY Register ID, Data content of the write command, and operating command type (Read or Write) on the above registers. Then the RTL8324P will auto process the PHY Read/Write access through the MDC/MDIO interface.

### **Read PHY Register Procedure**

Configure PHY Access Control Register (0x0500)

Read the result on PHY Access Read Data Register (0x0502)

### **Write PHY Register Procedure**

Write the PHY Access Write Data Register (0x0501)

Configure the PHY Access Control Register (0x0500)

### **PHY Address ID Definition**

The PHY address ID corresponds to the port location. The PHY address ID of Ports 0~15 are 0x10, 0x11, 0x12 ...., 0x1F, Ports 16~23 are 0x08, 0x09.....0x0F

## **8.27. LED Interfaces**

The RTL8324P provides a flexible per-port LED display to show the per-port link status and diagnostic information. Both a parallel and serial interface are provided to drive the LEDs.

During power on reset, the parallel LED signals are driven low and the serial interface shifts to a low value for about two seconds to turn on all the LEDs for testing purposes.

## **8.28. Parallel LED Interface**

The parallel interface only provides a system status LED.

LED signals include: LED\_loopDet, LED\_EnTrunk[5:0].

## 8.29. Serial LED Interface

The serial interface, SLED\_CLK, and SLED\_DATA provide clock and data to enable the external shift registers 74164 to capture the per-port link status and diagnostic information.

Another pin, LED\_DMODE\_CLK, provides the diagnostic items selection control. Each pulse signal input from this pin changes the diagnostic item to be displayed on the diagnostic LED.

Each port provides three port-state LEDs (StateLED) and one diagnostic LED (DiagLED). The LED display type can be flexibly configured and can be enabled or disabled to achieve the optimal BOM cost.

The LED display configuration is controlled by register 0x0005h ‘LED Display Configuration Register’, and can also be configured via EEPROM.

The StateLED display is defined by StatLED\_mode[2:0] on register 0x0005. The available display types are shown in the following table.

**Table 25. Serial LED Interface**

<b>StatLEDn_mode[2:0]</b>	<b>000</b>	<b>001</b>	<b>010</b>	<b>011</b>	<b>100</b>	<b>101</b>	<b>110</b>	<b>111</b>
StateLEDn Display Type	Link /Act	100Spd	Duplex /Col	Link/Act /100Spd	Duplex	Act	Link	Col

The display items of the diagnostic LED (DiagLED) are internally defined and are as follows:

**Table 26. Diagnostic LED Display**

<b>Item</b>	<b>Description</b>
(DiagItem_0) DisablePort/RxError	ON: Disabled port Blinking: RX CRC error
(DiagItem_1) FlowControl/FCActive	ON: Flow control enabled Blinking: Flow control active
(DiagItem_2) TrunkPort/TKFault	ON: Trunking enabled port Blinking: Trunk fault warning
(DiagItem_3) HighPriorityPort	ON: High priority port
(DiagItem_4) LoopDetectPort	ON: Network loop connection fault detect
(DiagItem_5) BroadcastStormAlarmPort	ON: Broadcast Storm Alarm port
(DiagItem_6) NULL	Reserved
(DiagItem_7) NULL	Reserved

The DiagLED display item is changed by a trigger signal input from hardware pin ‘LED\_DMODE\_CK’. The change sequence order of the DiagLED is:

DiagItem\_0 → DiagItem\_1 → DiagItem\_2 → ..... → DiagItem\_7 → Loop to DiagItem\_0

### 8.29.1. Serial LED Display Panel Example (4 LEDs, Register 0x0005)

Enable Serial LED Display Mode:

→ set EnSerialMode: 1

Define Per-port 4 LED Display Mode:

→ Configuration. set EnLED[3:0]: 1111

Define the statLED display type as: StatLED0=Link/Act, StatLED1=10/100M, StatLED2=Duplex/Collision:

→ Configuration. set StatLED0\_mode[2:0]=000, StatLED1\_mode[2:0]=001, StatLED2\_mode[2:0]=010

Follow the same method to configure the per-port 1 LED, per-port 2 LED, and per-port 3 LED display mode, with or without enabling the diagnostic LED.

The LED panel is shown in Figure 12.

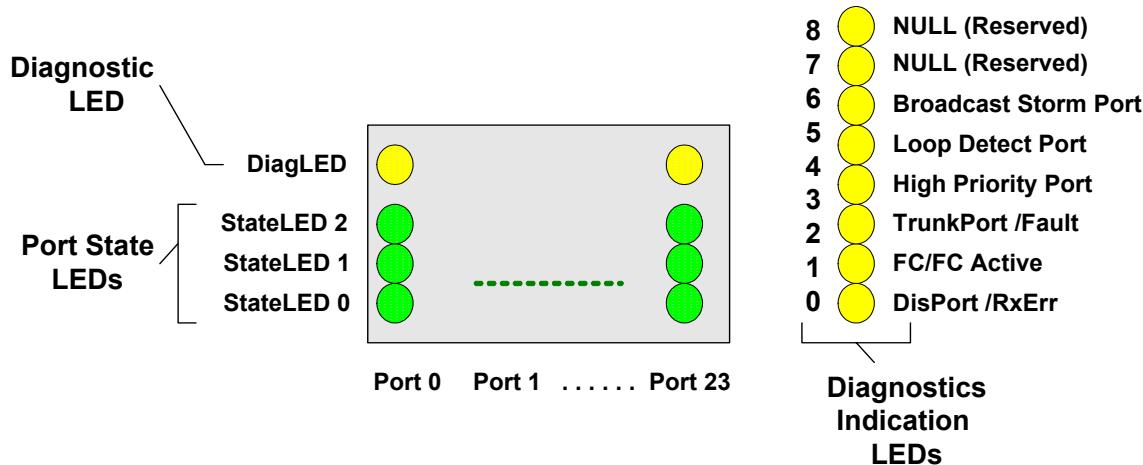


Figure 12. Serial LED Display

### 8.29.2. Serial LED Shift Out Sequence Order

The Serial LED output sequence is defined as follows: (first bit → .... → last bit).

Each port has four LEDs. There are eight diagnostic LEDs:

```



→ [P0 StateLED0] → [P0 StateLED1] → [P0 StateLED2] → [P0 DiagLED0]
→ [P1 StateLED0] → [P1 StateLED1] → [P1 StateLED2] → [P1 DiagLED0]
→ ----- → ----- → ----- → -----
→ [P23 StateLED0] → [P23 StateLED1] → [P23 StateLED2] → [P23 DiagLED0]
→ [Reserved_(DiagS0)] → [Reserved_(DiagS1)] → [Reserved_(DiagS2)] → [Reserved_(DiagS3)]
→ [Reserved_(DiagS4)] → [Reserved_(DiagS5)] → [Reserved_(DiagS6)] → [Reserved_(DiagS7)]

```

### 8.29.3. Serial LED Bi-Color LED Mode

For RTL8324P 3-bit Bi-color LED mode, Link/Act and Spd are used for one Bi-color LED package, which is a single LED package with two LEDs connected in parallel with opposite polarities.

Spd	Link/Act	Indication	Bi-Color state
0	0	No Link	Off
0	1	100Mb/s Link up	Green
1	0	10Mb/s Link up	Yellow

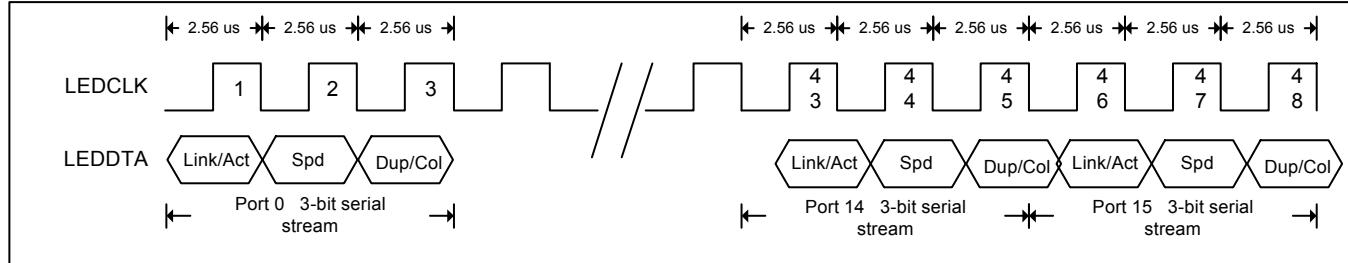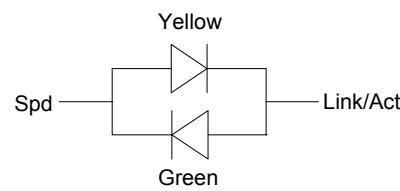

**3-Bit Serial Stream Mode**

### 8.30. SCANLED Interface

The RTL8324P supports Scan LED display mode. The forms of LED status streams, as shown below, are controlled by HW pin LEDMODE[1:0] = 2b'00 , and are latched upon reset.

**Table 27. Scan LED Status**

LED Status	Description
Spd	Speed Indicator High for 100Mbps and low for 10Mbps
Link/Act	Link, Activity Indicator High for link established Blinks when the corresponding port is transmitting or receiving
Col/Fulldup	Full duplex, Collision Indicator High for full duplex, and low for half duplex mode Blinks when there are collisions on the corresponding port

The RTL8324P provides three Scan LED groups that display each port's status:

#### Group A

(Scan\_LED\_A[5:0], Scan\_STSA[3:0]) displays status for port0~port7

#### Group B

(Scan\_LED\_B[5:0], Scan\_STSB[3:0]) displays status for port8~port15

**Group C**

(Scan\_LED[5:0], Scan\_STSC[3:0]) displays status for port16~port23.

Scan\_LED[5:0], Scan\_LED[5:0] and Scan\_LED[5:0] operate with the same timing phase. The Scan LED timing diagram is shown below:

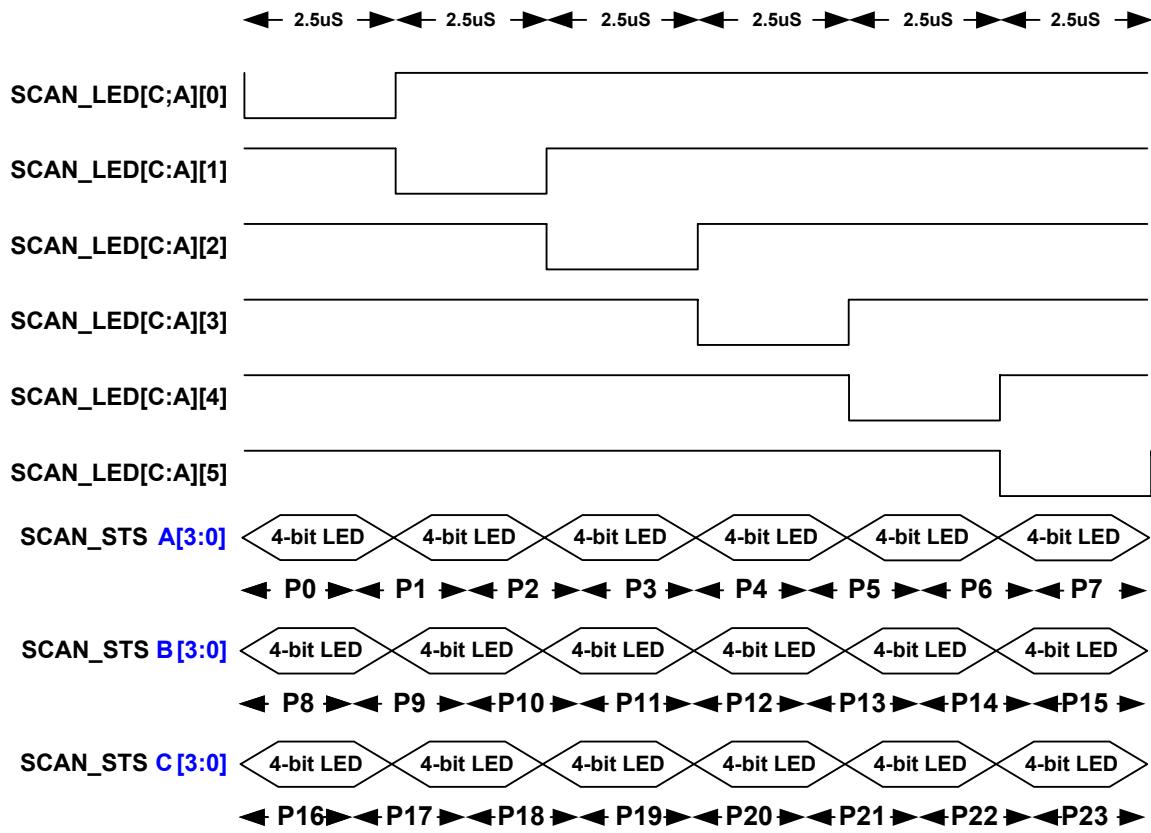
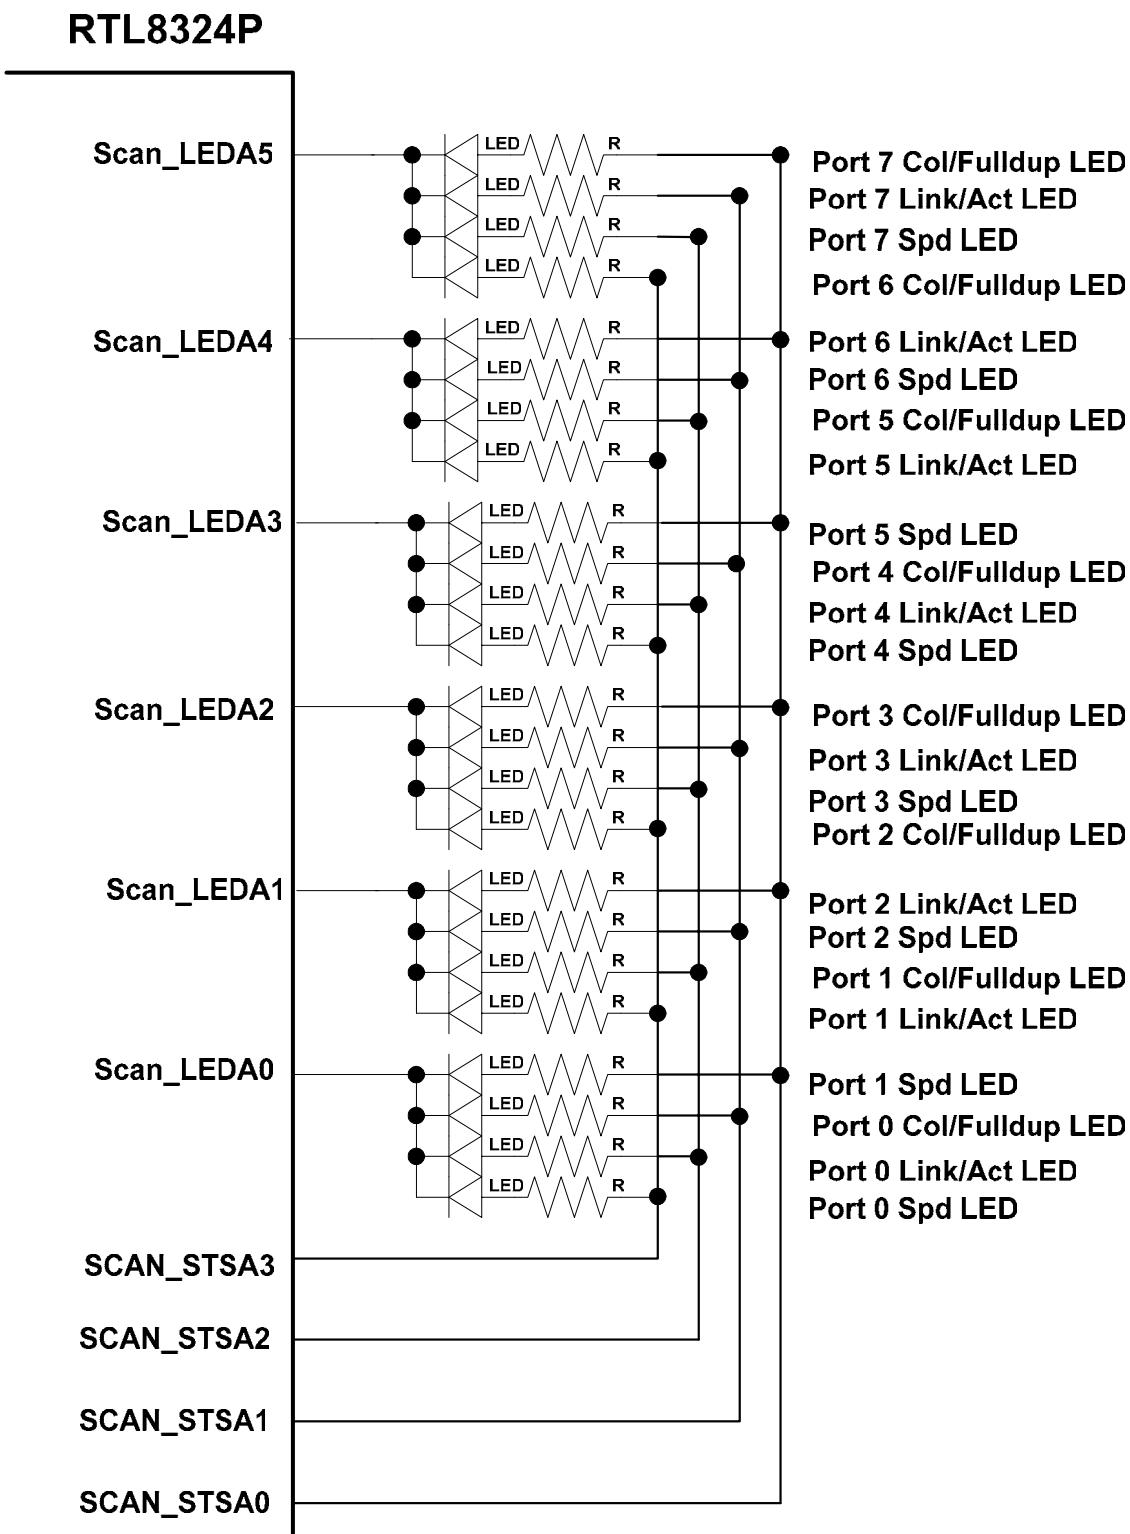
**Scan LED Timing Diagram**


Figure 13. Scan LED Timing Diagram

**External Circuit for Scan LED**

**Figure 14. External Circuit for Scan LED**

## 8.31. Port Mirroring

Port mirroring is used to forward traffic to a selected port based on one or more of the following:

- All traffic received from one or multi selected source ports (source mirroring)
- All traffic transmitted to one selected destination port (destination mirroring)

**Table 28. Port Mirror Control Register for P23-P0**

Register	Bits	Name	Description	RW	Default
0x0219	15:0	EnPortMirror(0)[15:0]	Enables the port-based mirror function. Bit n corresponds to port n. Write ‘1’ to enable a port’s mirror function	RW	0
0x021A	7:0	EnPortMirror(1)[7:0]	Enables the port-based mirror function. Used for MD_24FX Bit n corresponds to port (16+n). Write ‘1’ to enable a port’s mirror function	RW	0

**Table 29. RX Mirror Port Register for P23-P0**

Register	Bits	Name	Description	RW	Default
0x021B	15:0	Mirror_RX(0)[15:0]	Bit n corresponds to port n. Write ‘1’ to duplicate port n RX data to mirrored port.	RW	0
0x021C	7:0	Mirror_RX(1)[7:0]	Used for MD_24FX Bit n corresponds to port (16+n). Write ‘1’ to duplicate port n RX data to mirrored port.	RW	0

**Table 30. TX Mirror Port Register for P23-P0**

Register	Bits	Name	Description	RW	Default
0x021D	15:0	Mirror_TX(0)[15:0]	Bit n corresponds to port n. Write ‘1’ to duplicate port n TX data to mirrored port.	RW	0
0x021E	7:0	Mirror_TX(1)[7:0]	Used for MD_24FX Bit n corresponds to port (16+n). Write ‘1’ to duplicate port n TX data to mirrored port.	RW	0

## 9. Serial EEPROM Configuration (24LC08)

The EEPROM configuration bits are directly mapped to some of the internal registers. For example, EEPROM addresses 0x04h and 0x05h directly map to internal register 0x0005 ‘LED Display Configuration’.

The mapping rule is: EEPROM 0x00h: REG. 0x0002[7:0], EEPROM 0x01h: REG. 0x0002[15:8].

### 9.1. *EEPROM Configuration vs. Internal Register Mapping*

**Table 31. EEPROM Configuration vs. Internal Register Mapping**

EEPROM Physical Address (8-Bit Data Entry) (24LC08)	Description	Corresponding Internal Register Address Mapping	Internal Default
01~00	Internal Use	0x0002	0A80
03~02	Internal Use	0x0003	0155
05~04	LED Display Configuration 0	0x0005	0E88
07~06	Internal Use	0x0006	--
09~08	Reserved		
0B~0A	Reserved		
0D~0C	Realtek Protocol Control	0x0200	0000
0F~0E	RRCP security Mask Configuration 0	0x0201	0000
11~10	RRCP security Mask Configuration 1	0x0202	0000
13~12	Switch MAC ID 0	0x0203	0000
15~14	Switch MAC ID 1	0x0204	0000
17~16	Switch MAC ID 2	0x0205	0000
19~18	Chip ID 0	0x0206	0000
1B~1A	Vender ID 0	0x0207	0000
1D~1C	Vender ID 1	0x0208	0000
1F~1E	Reserved		
21~20	Reserved		
23~22	ALT Configuration	0x0300	0004
25~24	Port Trunking Configuration	0x0307	0000
27~26	IGMP Control Register	0x0308	0000
29~28	VLAN Control Register	0x030B	0000
2B~2A	Reserved		
2D~2C	Reserved		
2F~2E	QoS Control Register	0x0400	0010
31~30	Port Priority Configuration 0	0x0401	0000
33~32	Port Priority Configuration 1	0x0402	0000
35~34	Reserved		
37~36	Reserved		
39~38	Global Port Control Register	0x0607	0010
3B~3A	Port property Configuration 0	0x060A	AFAF
3D~3C	Port property Configuration 1	0x060B	AFAF
3F~3E	Port property Configuration 2	0x060C	AFAF

EEPROM Physical Address (8-Bit Data Entry) (24LC08)	Description	Corresponding Internal Register Address Mapping	Internal Default
41~40	Port property Configuration 3	0x060D	AFAF
43~42	Port property Configuration 4	0x060E	AFAF
45~44	Port property Configuration 5	0x060F	AFAF
47~46	Port property Configuration 6	0x0610	AFAF
49~48	Port property Configuration 7	0x0611	AFAF
4B~4A	Port property Configuration 8	0x0612	AFAF
4D~4C	Port property Configuration 9	0x0613	AFAF
4F~4E	Port property Configuration 10	0x0614	AFAF
51~50	Port property Configuration 11	0x0615	AFAF
53~52	Internal use		
55~54	Reserved		
57~56	Reserved		
59 ~~~ 5F	Reserved		
61~60	Designer Diagnostic Configuration	0xFFFF	0000
63~62	Reserved		
63~62	Reserved		
65~64	Reserved		
67~66	Reserved		
69~68	Port Disable Port0~Port15	0x0608	0000
6B~6A	Port Disable Port16~Port23	0x0609	0000
6D~6C	Reserved		
6F~6E	Reserved		
71~70	RRCP Password	0x0209	2379
73~72	Port Mirror Control Register for P15~P0	0x0219	0000
75~74	Reserved		
77~76	RX Mirror port mask for P15~P0	0x021B	0000
79~78	RX Mirror port mask for P23~P16		
7B~7A	TX Mirror port mask for P15~P0	0x021D	0000
7D~7C	TX Mirror port mask for P23~P16		
7F~7E	Reserved		
81~80	BW Control Register for P01~P00	0x020A	0000
83~82	BW Control Register for P03~P02	0x020B	0000
85~84	BW Control Register for P05~P04	0x020C	0000
87~86	BW Control Register for P07~P06	0x020D	0000
89~88	BW Control Register for P09~P08	0x020E	0000
8B~8A	BW Control Register for P11~P10	0x020F	0000
8D~8C	BW Control Register for P13~P12	0x0210	0000
8F~8E	BW Control Register for P15~P14	0x0211	0000
91~90	BW Control Register for P17~P16	0x0212	0000
93~92	BW Control Register for P19~P18	0x0213	0000
95~94	BW Control Register for P21~P20	0x0214	0000
97~96	BW Control Register for P23~P22	0x0215	0000
99~98	Port VLAN ID Assignment0	0x030C	0100

EEPROM Physical Address (8-Bit Data Entry) (24LC08)	Description	Corresponding Internal Register Address Mapping	Internal Default
9B~9A	Port VLAN ID Assignment1	0x030D	0302
9D~9C	Port VLAN ID Assignment2	0x030E	0504
9F~9E	Port VLAN ID Assignment3	0x030F	0706
A1~A0	Port VLAN ID Assignment4	0x0310	0908
A3~A2	Port VLAN ID Assignment5	0x0311	0B0A
A5~A4	Port VLAN ID Assignment6	0x0312	0D0C
A7~A6	Port VLAN ID Assignment7	0x0313	0F0E
A9~A8	Port VLAN ID Assignment8	0x0314	1110
AB~AA	Port VLAN ID Assignment9	0x0315	1312
AD~AC	Port VLAN ID Assignment10	0x0316	1514
AF~AE	Port VLAN ID Assignment11	0x0317	1716
B1~B0	Reserved		
B3~B2	VLAN TX Priority Tagging Control 0	0x0319	FFFF
B5~B4	VLAN TX Priority Tagging Control 1	0x031A	FFFF
B7~B6	VLAN TX Priority Tagging Control 2	0x031B	FFFF
B9~B8	Reserved		
BB~BA	Port VLAN Configuration0_0	0x031D	0001
BD~BC	Port VLAN Configuration0_1	0x031E	00C0
BF~BE	Port VLAN Configuration0_2	0x031F	0000
C1~C0	Port VLAN Configuration1_0	0x0320	0002
C3~C2	Port VLAN Configuration1_1	0x0321	00C0
C5~C4	Port VLAN Configuration1_2	0x0322	0000
C7~C6	Port VLAN Configuration2_0	0x0323	0004
C9~C8	Port VLAN Configuration2_1	0x0324	00C0
CB~CA	Port VLAN Configuration2_2	0x0325	0000
CD~CC	Port VLAN Configuration3_0	0x0326	0008
CF~CE	Port VLAN Configuration3_1	0x0327	00C0
D1~D0	Port VLAN Configuration3_2	0x0328	0000
D3~D2	Port VLAN Configuration4_0	0x0329	0010
D5~D4	Port VLAN Configuration4_1	0x032A	00C0
D7~D6	Port VLAN Configuration4_2	0x032B	0000
D9~D8	Port VLAN Configuration5_0	0x032C	0020
DB~DA	Port VLAN Configuration5_1	0x032D	00C0
DD~DC	Port VLAN Configuration5_2	0x032E	0000
DF~DE	Port VLAN Configuration6_0	0x032F	0040
E1~E0	Port VLAN Configuration6_1	0x0330	00C0
E3~E2	Port VLAN Configuration6_2	0x0331	0000
E5~E4	Port VLAN Configuration7_0	0x0332	0080
E7~E6	Port VLAN Configuration7_1	0x0333	00C0
E9~E8	Port VLAN Configuration7_2	0x0334	0000
EB~EA	Port VLAN Configuration8_0	0x0335	0100
ED~EC	Port VLAN Configuration8_1	0x0336	00C0
EF~EE	Port VLAN Configuration8_2	0x0337	0000

EEPROM Physical Address (8-Bit Data Entry) (24LC08)	Description	Corresponding Internal Register Address Mapping	Internal Default
F1~F0	Port VLAN Configuration9_0	0x0338	0200
F3~F2	Port VLAN Configuration9_1	0x0339	00C0
F5~F4	Port VLAN Configuration9_2	0x033A	0000
F7~F6	Port VLAN Configuration10_0	0x033B	0400
F9~F8	Port VLAN Configuration10_1	0x033C	00C0
FB~FA	Port VLAN Configuration10_2	0x033D	0000
FD~FC	Port VLAN Configuration11_0	0x033E	0800
FF~FE	Port VLAN Configuration11_1	0x033F	00C0
101~100	Port VLAN Configuration11_2	0x0340	0000
103~102	Port VLAN Configuration12_0	0x0341	1000
105~104	Port VLAN Configuration12_1	0x0342	00C0
107~106	Port VLAN Configuration12_2	0x0343	0000
109~108	Port VLAN Configuration13_0	0x0344	2000
10B~10A	Port VLAN Configuration13_1	0x0345	00C0
10D~10C	Port VLAN Configuration13_2	0x0346	0000
10F~10E	Port VLAN Configuration14_0	0x0347	4000
111~110	Port VLAN Configuration14_1	0x0348	00C0
113~112	Port VLAN Configuration14_2	0x0349	0000
115~114	Port VLAN Configuration15_0	0x034A	8000
117~116	Port VLAN Configuration15_1	0x034B	00C0
119~118	Port VLAN Configuration15_2	0x034C	0000
11B~11A	Port VLAN Configuration16_0	0x034D	0000
11D~11C	Port VLAN Configuration16_1	0x034E	00C1
11F~11E	Port VLAN Configuration16_2	0x034F	0000
121~120	Port VLAN Configuration17_0	0x0350	0000
123~122	Port VLAN Configuration17_1	0x0351	00C2
125~124	Port VLAN Configuration17_2	0x0352	0000
127~126	Port VLAN Configuration18_0	0x0353	0000
129~128	Port VLAN Configuration18_1	0x0354	00C4
12B~12A	Port VLAN Configuration18_2	0x0355	0000
12D~12C	Port VLAN Configuration19_0	0x0356	0000
12F~12E	Port VLAN Configuration19_1	0x0357	00C8
131~130	Port VLAN Configuration19_2	0x0358	0000
133~132	Port VLAN Configuration20_0	0x0359	0000
135~134	Port VLAN Configuration20_1	0x035A	00D0
137~136	Port VLAN Configuration20_2	0x035B	0000
139~138	Port VLAN Configuration21_0	0x035C	0000
13B~13A	Port VLAN Configuration21_1	0x035D	00E0
13D~13C	Port VLAN Configuration21_2	0x035E	0000
13F~13E	Port VLAN Configuration22_0	0x035F	FFFF
141~140	Port VLAN Configuration22_1	0x0360	00FF
143~142	Port VLAN Configuration22_2	0x0361	0000
145~144	Port VLAN Configuration23_0	0x0362	FFFF

EEPROM Physical Address (8-Bit Data Entry) (24LC08)	Description	Corresponding Internal Register Address Mapping	Internal Default
147~146	Port VLAN Configuration23_1	0x0363	00FF
149~148	Port VLAN Configuration23_2	0x0364	0000
14B~14A	Port VLAN Configuration24_0	0x0365	0000
14D~14C	Port VLAN Configuration24_1	0x0366	0000
14F~14E	Port VLAN Configuration24_2	0x0367	0000
151~150	Port VLAN Configuration25_0	0x0368	0000
153~152	Port VLAN Configuration25_1	0x0369	0000
155~154	Port VLAN Configuration25_2	0x036A	0000
157~156	Port VLAN Configuration26_0	0x036B	0000
159~158	Port VLAN Configuration26_1	0x036C	0000
15B~15A	Port VLAN Configuration26_2	0x036D	0000
15D~15C	Port VLAN Configuration27_0	0x036E	0000
15F~15E	Port VLAN Configuration27_1	0x036F	0000
161~160	Port VLAN Configuration27_2	0x0370	0000
163~162	Port VLAN Configuration28_0	0x0371	0000
165~164	Port VLAN Configuration28_1	0x0372	0000
167~166	Port VLAN Configuration28_2	0x0373	0000
169~168	Port VLAN Configuration29_0	0x0374	0000
16B~16A	Port VLAN Configuration29_1	0x0375	0000
16D~16C	Port VLAN Configuration29_2	0x0376	0000
16F~16E	Port VLAN Configuration30_0	0x0377	0000
171~170	Port VLAN Configuration30_1	0x0378	0000
173~172	Port VLAN Configuration30_2	0x0379	0000
175~174	Port VLAN Configuration31_0	0x037A	0000
177~176	Port VLAN Configuration31_1	0x037B	0000
179~178	Port VLAN Configuration31_2	0x037C	0000
17B~17A	Insert per-port VID enabling register0	0x037D	0000
17D~17C	Insert per-port VID enabling register1	0x037E	0000
17F~17E	Reserved		

## 10. Internal Register Descriptions

Symbols:

R:	Read	V:	Configurable
W:	Write	P:	Partially Configurable
RW:	Read/Write	X:	Not Configurable
R(W): (W: EEPROM. Permit writing by EEPROM)			

### 10.1. System Configuration Register

Table 32. System Configuration Register

Register Base Address	Offset	Description	RW	Default	Pin	EE
0x0000	0	System Reset	RW	0	X	X
	1	Switch Parameter Register	R(W)	0x84A0	X	X
	2	EEPROM Check ID	R	0	X	V
	3	Reserved	R	0x0100	X	V
	4	LED MODE	RW	0001	X	X
	5	LED Display Configuration 0	RW	1E88	X	V
	6	LED Display Configuration 1	RW	0C00	X	V

### 10.2. System Status Register

Table 33. System Status Register

Register Base Address	Offset	Description	RW	Default	Pin	EE
0x0100	0	Board Trapping Status	R(W)	0C01	X	X
	1	Loop Detect Status Register(32 bit Reg )	R	0	X	X
	2	System Fault Flag Register	R	0	X	X

### 10.3. Management Configuration Register

Table 34. Management Configuration Register

Register Base Address	Offset	Description	RW	Default	Pin	EE
0x0200	0	Realtek Protocol Control	RW	0001	X	V
	1	RRCP Security Mask Configuration (0)	RW	0	X	V

Register Base Address	Offset	Description	RW	Default	Pin	EE
	2	RRCP Security Mask Configuration (1)	RW	0	X	V
	3	Switch MAC ID (0)	R	0	X	V
	4	Switch MAC ID (1)	R	0	X	V
	5	Switch MAC ID (2)	R	0	X	V
	6	Chip ID (RO)	R	0	X	V
	7	Vender ID (0) (RO)	R	0	X	V
	8	Vender ID (1) (RO)	R	0	X	V
	9	RRCP Pass word	RW	0x2379	X	X
	0A	Port Rate Control Register	RW	0	X	X
	0B	Port Rate Control Register	RW	0	X	X
	0C	Port Rate Control Register	RW	0	X	X
	0D	Port Rate Control Register	RW	0	X	X
	0E	Port Rate Control Register	RW	0	X	X
	0F	Port Rate Control Register	RW	0	X	X
	10	Port Rate Control Register	RW	0	X	X
	11	Port Rate Control Register	RW	0	X	X
	12	Port Rate Control Register	RW	0	X	X
	13	Port Rate Control Register	RW	0	X	X
	14	Port Rate Control Register	RW	0	X	X
	15	Port Rate Control Register	RW	0	X	X
	16	Reserved		0		
	17	EEPROM RW Command Register	RW	0	X	X
	18	EEPROM RW Data Register	R(W)	0	X	X
	19	Port Mirror Control Register for P15-P0	RW	0	X	X
	1A	Port Mirror Control Register for P23-P16	RW	0	X	X
	1B	RX Mirror port mask for P15-P0	RW	0	X	X
	1C	RX Mirror port mask for P23-P16	RW	0	X	X
	1D	TX Mirror port mask for P15-P0	RW	0	X	X
	1E	TX Mirror port mask for P23-P16	RW	0	X	X

## 10.4. Address Lookup Table (ALT) Control Register

Table 35. Address Lookup Table (ALT) Control Register

Register Base Address	Offset	Description	RW	Default	Pin	EE
0x0300	0	ALT Configuration	RW	0	P	P
	1	Address Learning Control (0)	RW	0	X	X
	2	Address Learning Control (1)	RW	0	X	X
	3	Unknown SA Management 0 (RO) (0)	R	--	X	X
	4	Unknown SA Management 0 (RO) (1)	R	--	X	X
	5	Unknown SA Management 0 (RO) (2)	R	--	X	X
	6	Unknown SA Management 1(RO)	R	--	X	X

Register Base Address	Offset	Description	RW	Default	Pin	EE
	7	Port Trunking Configuration	RW	8200	P	V
	8	IGMP Control Register	RW	8200	V	V
	9	IP Multicast Router Discovery	R	0	X	X
	0A	Reserved		0		
	0B	VLAN Control Register	RW	0	P	V
	0C	Port VLAN ID Assignment (0)	RW	0100	X	X
	0D	Port VLAN ID Assignment (1)	RW	0302	X	X
	0E	Port VLAN ID Assignment (2)	RW	0504	X	X
	0F	Port VLAN ID Assignment (3)	RW	0706	X	X
	10	Port VLAN ID Assignment (4)	RW	0908	X	X
	11	Port VLAN ID Assignment (5)	RW	0B0A	X	X
	12	Port VLAN ID Assignment (6)	RW	0D0C	X	X
	13	Port VLAN ID Assignment (7)	RW	0F0E	X	X
	14	Port VLAN ID Assignment (8)	RW	1110	X	X
	15	Port VLAN ID Assignment (9)	RW	1312	X	X
	16	Port VLAN ID Assignment (10)	RW	1514	X	X
	17	Port VLAN ID Assignment (11)	RW	1716	X	X
	18	Reserved				
	19	VLAN TX Priority Tagging Control (0)	RW	FFFF	X	X
	1A	VLAN TX Priority Tagging Control (1)	RW	FFFF	X	X
	1B	VLAN TX Priority Tagging Control (2)	RW	FFFF	X	X
	1C	Reserved				
		Port VLAN Configuration ( 32*[0,1,2])	RW		X	X
	1D	VLAN_0_Entry_Configuration_0 (member[15:0])	RW	0001	X	X
	1E	VLAN_0_Entry_Configuration_1 (member[23:16])	RW	00C0	X	X
	1F	VLAN_0_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	20	VLAN_1_Entry_Configuration_0 (member[15:0])	RW	0002	X	X
	21	VLAN_1_Entry_Configuration_1 (member[23:16])	RW	00C0	X	X
	22	VLAN_1_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	23	VLAN_2_Entry_Configuration_0 (member[15:0])	RW	0004	X	X
	24	VLAN_2_Entry_Configuration_1 (member[23:16])	RW	00C0	X	X
	25	VLAN_2_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	26	VLAN_3_Entry_Configuration_0 (member[15:0])	RW	0008	X	X
	27	VLAN_3_Entry_Configuration_1 (member[23:16])	RW	00C0	X	X
	28	VLAN_3_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	29	VLAN_4_Entry_Configuration_0 (member[15:0])	RW	0010	X	X
	2A	VLAN_4_Entry_Configuration_1 (member[23:16])	RW	00C0	X	X
	2B	VLAN_4_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	2C	VLAN_5_Entry_Configuration_0 (member[15:0])	RW	0020	X	X
	2D	VLAN_5_Entry_Configuration_1 (member[23:16])	RW	00C0	X	X
	2E	VLAN_5_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	2F	VLAN_6_Entry_Configuration_0 (member[15:0])	RW	0040	X	X
	30	VLAN_6_Entry_Configuration_1 (member[23:16])	RW	00C0	X	X

Register Base Address	Offset	Description	RW	Default	Pin	EE
	31	VLAN_6_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	32	VLAN_7_Entry_Configuration_0 (member[15:0])	RW	0080	X	X
	33	VLAN_7_Entry_Configuration_1 (member[23:16])	RW	00C0	X	X
	34	VLAN_7_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	35	VLAN_8_Entry_Configuration_0 (member[15:0])	RW	0100	X	X
	36	VLAN_8_Entry_Configuration_1 (member[23:16])	RW	01C0	X	X
	37	VLAN_8_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	38	VLAN_9_Entry_Configuration_0 (member[15:0])	RW	0200	X	X
	39	VLAN_9_Entry_Configuration_1 (member[23:16])	RW	02C0	X	X
	3A	VLAN_9_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	3B	VLAN_10_Entry_Configuration_0 (member[15:0])	RW	0400	X	X
	3C	VLAN_10_Entry_Configuration_1 (member[23:16])	RW	04C0	X	X
	3D	VLAN_10_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	3E	VLAN_11_Entry_Configuration_0 (member[15:0])	RW	0800	X	X
	3F	VLAN_11_Entry_Configuration_1 (member[23:16])	RW	08C0	X	X
	40	VLAN_11_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	41	VLAN_12_Entry_Configuration_0 (member[15:0])	RW	1000	X	X
	42	VLAN_12_Entry_Configuration_1 (member[23:16])	RW	10C0	X	X
	43	VLAN_12_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	44	VLAN_13_Entry_Configuration_0 (member[15:0])	RW	2000	X	X
	45	VLAN_13_Entry_Configuration_1 (member[23:16])	RW	20C0	X	X
	46	VLAN_13_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	47	VLAN_14_Entry_Configuration_0 (member[15:0])	RW	4000	X	X
	48	VLAN_14_Entry_Configuration_1 (member[23:16])	RW	40C0	X	X
	49	VLAN_14_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	4A	VLAN_15_Entry_Configuration_0 (member[15:0])	RW	8000	X	X
	4B	VLAN_15_Entry_Configuration_1 (member[23:16])	RW	80C0	X	X
	4C	VLAN_15_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	4D	VLAN_16_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	4E	VLAN_16_Entry_Configuration_1 (member[23:16])	RW	00C1	X	X
	4F	VLAN_16_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	50	VLAN_17_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	51	VLAN_17_Entry_Configuration_1 (member[23:16])	RW	00C2	X	X
	52	VLAN_17_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	53	VLAN_18_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	54	VLAN_18_Entry_Configuration_1 (member[23:16])	RW	00C4	X	X
	55	VLAN_18_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	56	VLAN_19_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	57	VLAN_19_Entry_Configuration_1 (member[23:16])	RW	00C8	X	X
	58	VLAN_19_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	59	VLAN_20_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	5A	VLAN_20_Entry_Configuration_1 (member[23:16])	RW	00D0	X	X
	5B	VLAN_20_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X

Register Base Address	Offset	Description	RW	Default	Pin	EE
	5C	VLAN_21_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	5D	VLAN_21_Entry_Configuration_1 (member[23:16])	RW	00E0	X	X
	5E	VLAN_21_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	5F	VLAN_22_Entry_Configuration_0 (member[15:0])	RW	FFFF	X	X
	60	VLAN_22_Entry_Configuration_1 (member[23:16])	RW	FFFF	X	X
	61	VLAN_22_Entry_Configuration_2 (VID[11:0])	RW	F000	X	X
	62	VLAN_23_Entry_Configuration_0 (member[15:0])	RW	FFFF	X	X
	63	VLAN_23_Entry_Configuration_1 (member[23:16])	RW	FFFF	X	X
	64	VLAN_23_Entry_Configuration_2 (VID[11:0])	RW	F000	X	X
	65	VLAN_24_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	66	VLAN_24_Entry_Configuration_1 (member[23:16])	RW	0000	X	X
	67	VLAN_24_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	68	VLAN_25_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	69	VLAN_25_Entry_Configuration_1 (member[23:16])	RW	0000	X	X
	6A	VLAN_25_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	6B	VLAN_26_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	6C	VLAN_26_Entry_Configuration_1 (member[23:16])	RW	0000	X	X
	6D	VLAN_26_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	6E	VLAN_27_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	6F	VLAN_27_Entry_Configuration_1 (member[23:16])	RW	0000	X	X
	70	VLAN_27_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	71	VLAN_28_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	72	VLAN_28_Entry_Configuration_1 (member[23:16])	RW	0000	X	X
	73	VLAN_28_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	74	VLAN_29_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	75	VLAN_29_Entry_Configuration_1 (member[23:16])	RW	0000	X	X
	76	VLAN_29_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	77	VLAN_30_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	78	VLAN_30_Entry_Configuration_1 (member[23:16])	RW	0000	X	X
	79	VLAN_30_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	7A	VLAN_31_Entry_Configuration_0 (member[15:0])	RW	0000	X	X
	7B	VLAN_31_Entry_Configuration_1 (member[23:16])	RW	0000	X	X
	7C	VLAN_31_Entry_Configuration_2 (VID[11:0])	RW	0000	X	X
	7D	Insert per-port VID enabling register	RW	0	X	V
	7E	Insert per-port VID enabling register	RW	0	X	V

## 10.5. Queue Control Register

Table 36. Queue Control Register

Register Base Address	Offset	Description	RW	Default	Pin	EE
0x0400	0	QoS Control Register	RW	0	V	V
	1	Port Priority Configuration (0)	RW	0	V	V
	2	Port Priority Configuration (1)	RW	0	V	V
	8	Reserved (Used by RRCP software)	RW	0	V	V

## 10.6. PHY Access Control Register

Table 37. PHY Access Control Register

Register Base Address	Offset	Description	RW	Default	Pin	EE
0x0500	0	PHY Access Addressing Control	R(W)	0	X	X
	1	PHY Access Write Data	RW	--	X	X
	2	PHY Access Read Data	R	--	X	X

## 10.7. Port Control Register

Table 38. Port Control Register

Register Base Address	Offset	Description	RW	Default	Pin	EE
0x0600	0~6	Reserved				
	7	Global Port Control Register	RW	0010	V	V
	8	Port Access Authority Control (0)	RW	0	X	X
	9	Port Access Authority Control (1)	RW	0	X	X
	A	Port Property Configuration Register 0 (Port 0, 1)	RW	AFAF	X	V
	B	Port Property Configuration Register 1 (Port 2, 3)	RW	AFAF	X	V
	C	Port Property Configuration Register 2 (Port 4, 5)	RW	AFAF	X	V
	D	Port Property Configuration Register 3 (Port 6, 7)	RW	AFAF	X	V
	E	Port Property Configuration Register 4 (Port 8, 9)	RW	AFAF	X	V
	F	Port Property Configuration Register 5 (Port 10, 11)	RW	AFAF	X	V
	10	Port Property Configuration Register 6 (Port 12, 13)	RW	AFAF	X	V
	11	Port Property Configuration Register 7 (Port 14, 15)	RW	AFAF	X	V
	12	Port Property Configuration Register 8 (Port 16, 17)	RW	AFAF	X	V
	13	Port Property Configuration Register 9 (Port 18, 19)	RW	AFAF	X	V
	14	Port Property Configuration Register 10 (Port 20, 21)	RW	AFAF	X	V
	15	Port Property Configuration Register 11 (Port 22, 23)	RW	AFAF	X	V
	16	Reserved				
	17	Reserved				
	18	Reserved[15:2], SyncOk [1:0]	R		X	X
	19	Port Link Status Register 0 (Port 0, 1)	R	0	X	X

Register Base Address	Offset	Description	RW	Default	Pin	EE
	1A	Port Link Status Register 1 (Port 2, 3)	R	0	X	X
	1B	Port Link Status Register 2 (Port 4, 5)	R	0	X	X
	1C	Port Link Status Register 3 (Port 6, 7)	R	0	X	X
	1D	Port Link Status Register 4 (Port 8, 9)	R	0	X	X
	1E	Port Link Status Register 5 (Port 10, 11)	R	0	X	X
	1F	Port Link Status Register 6 (Port 12, 13)	R	0	X	X
	20	Port Link Status Register 7 (Port 14, 15)	R	0	X	X
	21	Port Link Status Register 8 (Port 16, 17)	R	0	X	X
	22	Port Link Status Register 9 (Port 18, 19)	R	0	X	X
	23	Port Link Status Register 10 (Port 20, 21)	R	0	X	X
	24	Port Link Status Register 11 (Port 22, 23)	R	0	X	X
	25	Reserved				
	26	Reserved				
	27	Reserved				
	28	Reserved				

## 10.8. MIB Counter Register

**Table 39. MIB Counter Register**

Register Base Address	Offset	Description	RW	Default	Pin	EE
0x0700	0	Port MIB Counter Object Selection Register 0 (Port 0, 1)	RW	0555	X	X
	1	Port MIB Counter Object Selection Register 1 (Port 2, 3)	RW	0555	X	X
	2	Port MIB Counter Object Selection Register 2 (Port 4, 5)	RW	0555	X	X
	3	Port MIB Counter Object Selection Register 3 (Port 6, 7)	RW	0555	X	X
	4	Port MIB Counter Object Selection Register 4 (Port 8, 9)	RW	0555	X	X
	5	Port MIB Counter Object Selection Register 5 (Port 10, 11)	RW	0555	X	X
	6	Port MIB Counter Object Selection Register 6 (Port 12, 13)	RW	0555	X	X
	7	Port MIB Counter Object Selection Register 7 (Port 14, 15)	RW	0555	X	X
	8	Port MIB Counter Object Selection Register 8 (Port 16, 17)	RW	0555	X	X
	9	Port MIB Counter Object Selection Register 9 (Port 18, 19)	RW	0555	X	X
	A	Port MIB Counter Object Selection Register 10 (Port 20, 21)	RW	0555	X	X
	B	Port MIB Counter Object Selection Register 11 (Port 22, 23)	RW	0555	X	X
	C	Reserved				

### 10.8.1. Port MIB Counter 1 Register (RX Counter) (32-bits)

Table 40. Port MIB Counter 1 Register (RX Counter) (32-bits)

Register Base Address	Offset	Description	RW	Default	Pin	EE
0x0700	D	Port 0 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	E	Port 1 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	F	Port 2 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	10	Port 3 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	11	Port 4 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	12	Port 5 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	13	Port 6 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	14	Port 7 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	15	Port 8 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	16	Port 9 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	17	Port 10 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	18	Port 11 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	19	Port 12 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	1A	Port 13 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	1B	Port 14 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	1C	Port 15 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	1D	Port 16 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	1E	Port 17 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	1F	Port 18 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	20	Port 19 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	21	Port 20 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	22	Port 21 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	23	Port 22 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	24	Port 23 MIB Counter 1 Register (RX Counter) (32-bits)	R	0	X	X
	25	Reserved				
	26	Reserved				

## 10.8.2. Port MIB Counter 2 Register (TX Counter) (32-bits)

**Table 41. Port MIB Counter 2 Register (TX Counter) (32-bits)**

Register Base Address	Offset	Description	RW	Default	Pin	EE
0x0700	27	Port 0 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	28	Port 1 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	29	Port 2 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	2A	Port 3 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	2B	Port 4 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	2C	Port 5 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	2D	Port 6 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	2E	Port 7 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	2F	Port 8 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	30	Port 9 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	31	Port 10 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	32	Port 11 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	33	Port 12 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	34	Port 13 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	35	Port 14 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	36	Port 15 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	37	Port 16 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	38	Port 17 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	39	Port 18 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	3A	Port 19 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	3B	Port 20 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	3C	Port 21 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	3D	Port 22 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	3E	Port 23 MIB Counter 2 Register (TX Counter) (32-bits)	R	0	X	X
	3F	Reserved				
	40	Reserved				

### 10.8.3. Port MIB Counter 3 Register (Diagnostic Counter) (32-bits)

**Table 42. Port MIB Counter 3 Register (Diagnostic Counter) (32-bits)**

Register Base Address	Offset	Description	RW	Default	Pin	EE
0x0700	41	Port 0 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	42	Port 1 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	43	Port 2 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	44	Port 3 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	45	Port 4 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	46	Port 5 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	47	Port 6 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	48	Port 7 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	49	Port 8 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	4A	Port 9 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	4B	Port 10 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	4C	Port 11 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	4D	Port 12 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	4E	Port 13 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	4F	Port 14 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	50	Port 15 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	51	Port 16 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	52	Port 17 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	53	Port 18 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	54	Port 19 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	55	Port 20 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	56	Port 21 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	57	Port 22 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	58	Port 23 MIB Counter 3 Register (Diagnostic Counter)(32-bits)	R	0	X	X
	59	Reserved				
	5A	Reserved				

### 10.9. System Parameter Register (Reserved)

**Table 43. System Parameter Register (Reserved)**

Register Base Address	Offset	Description	RW	Default	Pin	EE
0xFFFF	--	System Parameter Register (Reserved).	RW	0	V	V

## 11. Internal Register Settings

Register Symbols:

R:	Read	LL:	Latch Low until cleared
W:	Write	LH:	Latch High until cleared
RW:	Read/Write	SC:	Self Clearing
(W: EEPROM. Permit writing by EEPROM)			RC: Read to Clear

### 11.1. System Configuration Register

#### 11.1.1. 0x0000H: System Reset Control Register

Table 44. 0x0000H: System Reset Control Register

Bits	Name	Description	RW	Default
0	SRST	Soft Reset. A soft reset will reset the system similar to a power on reset except that the user configuration will not be cleared: 1. The MAC table and VLAN table data are kept. 2. All current user configured internal register values are kept. 3. The EEPROM download is not done again. 4. The system restarts the auto-negotiation process.  0: Normal (Default) 1: Soft reset	W/SC	0
1	HRST	Hardware Reset. Resets the system to the power on initial state: 1. Downloads configuration from strap pin and EEPROM. 2. Starts internal Memory self test. 3. Clears all the MAC, VLAN tables. 4. Resets all registers to default values. 5. Restarts auto-negotiation.  0: Normal (Default) 1: Hardware reset	W/SC	0
15:2	Reserved			

### 11.1.2. 0x0001H: Switch Parameter Register

*Note: The Write operation is reserved for IC testing mode. Do NOT write this register.*

**Table 45. 0x0001H: Switch Parameter Register**

Bits	Name	Description	RW	Default
1:0	MaxPktLen[1:0]	System Valid Max Packet Length. The minimum packet length is 64 bytes. The maximum packet length is controlled by MaxPktLen[1:0]: 00: 1536 bytes (Default) 01: 1552 byte 1x: Reserved.	RW	00 HW pin MaxPktLen
2	TXIPG_Comp	Transmit IPG Compensation. Used to compensate the oscillator frequency or incoming packet Inter-Packet Gap (IPG) tolerance. 0: Give +65 ppm TXIPG compensation (Default) 1: Give +90 ppm TXIPG compensation	RW	0
3	MaxPauseCnt	Max Pause Count for Congestion Control. 0: Supports a maximum of 128 Pause frames during congestion control (Default) 1: Continue Pause mode. Do not limit the Pause frame count during congestion control.	RW	0 HW pin MaxPauseCnt
4	DisBKP48One  (EnBKP48One)	Disable Back pressure 48 Pass One Algorithm. When the 48One algorithm is enabled, the switch will pass one incoming packet after every 48 collisions. 0: Enable 48 Pass One algorithm (Default) 1: Disable 48 Pass One algorithm	RW	0 HW pin EnBKP48One
6:5	Reserved	Internal test bit.		
7	DisCRSBKPMODE  (EnCOLBKPMODE)	Disable Carrier Based Back Pressure Mode. Half duplex back pressure algorithm selection. 0: Select Collision-based back pressure mode 1: Select Carrier-based back pressure mode (Default)	RW	1 HW pin EnCOLBKPMODE
15:8	Reserved	Internal test bit.		

### 11.1.3. 0x0002H: EEPROM Check ID

**Table 46. 0x0002H: EEPROM Check ID**

Bits	Name	Description	RW	Default
5:0	Reserved (EEPROM Check ID)	Reserved bits. Used for EEPROM existence checking. Keep the value at 000000.		
15:6	Reserved	Internal test bit.		

### 11.1.4. 0x0004H: General Purpose User Defined I/O Data Register

**Table 47. 0x0004H: General Purpose User Defined I/O Data Register**

Bits	Name	Description	RW	Default
1:0	LED MODE	00: Scan Led 01: Single-color serial (default) 10: Bi-color serial 11: RSVD	RW	01 HW pin P9TXD P8TXD
15:2	Reserved			

### 11.1.5. 0x0005H: LED Display Configuration

**Table 48. 0x0005H: LED Display Configuration**

Bits	Name	Description	RW	Default
2:0	StatLED0_mode[2:0]	Mode Selection for State LED0.  This state LED mode selection register controls the status type of the State LED0. The Status type is defined as follows:  000: Link/Act (Default) 001: 100Spd 010: Duplex/Col 011: Link/Act/100Spd 100: Duplex 101: Act 110: Link 111: Col	RW	000
5:3	StatLED1_mode[2:0]	Mode Selection for State LED1.  000: Link/Act 001: 100Spd (Default) 010: Duplex/Col 011: Link/Act/100Spd 100: Duplex 101: Act 110: Link 111: Col	RW	001
8:6	StatLED2_mode[2:0]	Mode Selection for State LED2.  000: Link/Act 001: 100Spd 010: Duplex/Col (Default) 011: Link/Act/100Spd 100: Duplex 101: Act 110: Link 111: Col	RW	010

Bits	Name	Description	RW	Default
12:9	EnLED[3:0]	<p>State LED 0, 1, 2 and Diagnostic LED Enable/Disable Control.</p> <p>EnLED[3:0] controls enabling/disabling of DiagLED, StatLED2, StatLED1, StatLED0.</p> <p>0: Disable 1: Enable</p> <p>If an LED is disabled, the corresponding serial clock will be masked.</p>	RW	0111
14:13	Diagnostic mode		RW	00
15	Reserved			

## 11.2. *System Status Register*

### 11.2.1. 0x0100H: Board Trapping Status Register

Table 49. 0x0100H: Board Trapping Status Register

Bits	Name	Description	RW	Default
0	EEPROM_detect_status	<p>EEPROM Existence Status.</p> <p>0: Exists (Default) 1: Does not Exist</p>	R	0
15:2	Reserved			

### 11.2.2. 0x0101H: Loop Detect Status Register (32-Bit Register)

Table 50. 0x0101H: Loop Detect Status Register (32-Bit Register)

Bits	Name	Description	RW	Default
23:0	LoopDetPort[23:0]	<p>Network Loop event Detect Port Status.</p> <p>If the loop detect function is enabled, the corresponding bit of LoopDetPort[23:0] will be set whenever a loop event is detected on the corresponding switch port. The set bit is cleared only when the loop event has disappeared on that port.</p> <p>When the loop detect function is enabled, the switch will periodically transmit one loop detect diagnostic frame. The normal interval time is approx. five minutes. When a loop event is detected, the interval time will be changed to fast mode. In fast mode the interval time is about 1 second in order to accelerate detection and diagnostic. The loop event will be reported in this Loop Detect Status Register.</p> <p>0: No Loop detected on this port (Default) 1: Loop detected on this port</p>	R	0
31:24	Reserved			

### 11.2.3. 0x0102H: System Fault Indication Register

**Table 51. 0x0102H: System Fault Indication Register**

Bits	Name	Description	RW	Default
0	Reserved			
1	TrunkFault	<p>Trunk Fault event flag.</p> <p>The flag indicates that there is a trunk port member link down. The trunk will still continue to operate due to the trunk auto fault recovery algorithm.</p> <p>0: No trunk fault detected (Default) 1: Trunk fault detected</p>	R	0
2	LoopFault	<p>Network Loop Fault Indication.</p> <p>When the Loop Fault indication is set, a loop detected port will be reported on the Loop Detect Port Register.</p> <p>0: Network Loop not detected (Default) 1: Network Loop detected</p>	R	0
5:3	Reserved			
11:6	FaultTkGroup[5:0]	<p>The Fault Trunk Group Indicator.</p> <p>Indicates a Link Fault in the trunk group.</p> <p>A physical link failure of an enabled trunk group will cause the corresponding bit to be set in the FaultTkGroup[5:0]. This is a real time fault status report.</p> <p>Even though the Trunk Group's fault occurred and the fault bit is set, the corresponding trunk can still work properly as fault recovery will be auto applied.</p> <p>FaultTkGroup[0] indicator for Trunk 1: (port 0, 1, 2, 3)            FaultTkGroup[1] indicator for Trunk 2: (port 4, 5, 6, 7)            FaultTkGroup[2] indicator for Trunk 3: (port 8, 9, 10, 11)            FaultTkGroup[3] indicator for Trunk 4: (port 12, 13, 14, 15)            FaultTkGroup[4] indicator for Trunk 5: (port 16, 17, 18, 19)            FaultTkGroup[5] indicator for Trunk 6: (port 20, 21, 22, 23)</p> <p>0: Trunk OK 1: Trunk Fault detected</p>	R	000000
15:12	Reserved			

## 11.3. Management Configuration Register

### 11.3.1. 0x0200H: Realtek Protocol Control Register

**Table 52. 0x0200H: Realtek Protocol Control Register**

Bits	Name	Description	RW	Default
0	DisRRCP (EnRRCP)	Disable Realtek Remote Control Protocol (RRCP). 0: Enable RRCP 1: Disable RRCP (Default)	RW	1 HW pin: EnRRCP
1	DisREcho	Disable Realtek Remote Echo Protocol. 0: Enable REcho protocol (Default) 1: Disable REcho protocol	RW	0
2	EnLoopDet	Enable Loop Detect Function. When enabled, the loop detect status will be reported in register 0x0101 (Loop Detect Status Register). 0: Disable(Default) 1: Enable	RW	0
15:3	Reserved			

### 11.3.2. 0x0201H: RRCP Security Mask Configuration Register 0

**Table 53. 0x0201H: RRCP Security Mask Configuration Register 0**

Bits	Name	Description	RW	Default
15:0	RRCP_SMask[15:0]	RRCP Management Security Mask Configuration. Configuration for ports 0 to 15. Specifies which port's incoming RRCP access commands will be responded to. 0: RRCP Access enabled port (Default) 1: RRCP Access disabled port <i>Note: Ports 0~23 RRCP security mask will be set if the hardware strap pin EnHomeVlan is pulled high during power on reset. This can be over written by EEPROM or registers access.</i>	RW	0

### 11.3.3. 0x0202H: RRCP Security Mask Configuration Register 1

**Table 54. 0x0202H: RRCP Security Mask Configuration Register 1**

Bits	Name	Description	RW	Default
7:0	RRCP_SMask[23:16]	RRCP Management Security Mask Configuration. Configuration for ports 16 to 23. Specifies which port's incoming RRCP access commands will be responded to. 0: RRCP Access enabled port (Default) 1: RRCP Access disabled port Note: Ports 0~23 RRCP security mask will be set if the hardware strap pin EnHomeVlan is pulled high during power on reset. This can be over written by EEPROM or register access.	RW	0

### 11.3.4. 0x0203H: Switch MAC ID Register 0

**Table 55. 0x0203H: Switch MAC ID Register 0**

Bits	Name	Description	RW	Default
15:0	MACID[15:0]	Switch Physical MAC Address bit[15:0]. E.g., For the 48-bit MAC address '52-54-4C-01-02-03', then MACID[15:0]=54-52.	R (W: EEPROM)	0

### 11.3.5. 0x0204H: Switch MAC ID Register 1

**Table 56. 0x0204H: Switch MAC ID Register 1**

Bits	Name	Description	RW	Default
15:0	MACID[31:16]	Switch Physical MAC Address bit[31:16] E.g., For the 48-bit MAC address '52-54-4C-01-02-03', then MACID[15:0]=54-52.	R (W: EEPROM)	0

### 11.3.6. 0x0205H: Switch MAC ID Register 2

**Table 57. 0x0205H: Switch MAC ID Register 2**

Bits	Name	Description	RW	Default
15:0	MACID[47:32]	Switch Physical MAC Address bit[47:32]. E.g., For the 48-bit MAC address '52-54-4C-01-02-03', then MACID[15:0]=54-52.	R (W: EEPROM)	0

### 11.3.7. **0x0206H: Chip Model ID**

**Table 58. 0x0206H: Chip Model ID**

Bits	Name	Description	RW	Default
7:0	ChipID[7:0]	Chip ID. Identifies the chip version for programmer version control.	R (W: EEPROM)	0
15:8	Reserved			

### 11.4. **0x0207H: System Vender ID Register 0**

**Table 59. 0x0207H: System Vender ID Register 0**

Bits	Name	Description	RW	Default
15:0	VenderID[15:0]	System Vender Identity Stream [15:0]. Used for the system vender to fill a code or name stream for switch device model number or vender name identification.	R (W: EEPROM)	0

### 11.5. **0x0208H: System Vender ID Register 1**

**Table 60. 0x0208H: System Vender ID Register 1**

Bits	Name	Description	RW	Default
15:0	VenderID[31:16]	System Vender Identity Stream [31:16]. Used for system vender to fill a code or name stream for switch device model number or vender name identification.	R (W: EEPROM)	0

## 11.6. *0x0209H: RRCP Authentication Key Configuration Register*

**Table 61. 0x0209H: RRCP Authentication Key Configuration Register**

Bits	Name	Description	RW	Default
15:0	RRCP_KEY[15:0]	<p>RRCP Access Authentication Key Configuration.</p> <p>After power on reset, the RRCP Authentication Key is set to the default value ‘0x2379’. It can be updated via the CPU interface or by an RRCP control frame with a correct current authentication key value in the frame.</p> <p>The Authentication Key checking rule for RRCP frames is defined as follows:</p> <ol style="list-style-type: none"> <li>For the Hello command frame:           <ul style="list-style-type: none"> <li>-- Broadcast Hello frame: Do not check Auth. Key.</li> <li>-- Unicast Hello frame: Auth. Key = RRCP_KEY[15:0]</li> </ul> </li> </ol> <p>Note: When the RRCP_KEY[15:0] is updated by the user, only unicast Hello frames are valid.</p> <ol style="list-style-type: none"> <li>For a Get/Set command frame:           <p>Always uses the current key value defined by RRCP_KEY[15:0]</p> </li> </ol>	RW	0x2379

## 11.7. *0x020AH: Port 0, 1 Bandwidth Control Register*

**Table 62. 0x020AH: Port 0, 1 Bandwidth Control Register**

Bits	Name	Description	RW	Default
3:0	P0RXRate[3:0]	<p>Port 0 RX Bandwidth Control.</p> <p>Configures the maximum output bandwidth of the port.</p> <p>Bit 3 is a reserved bit.</p> <p>Bit[2:0] controls the maximum RX rate of the port.</p> <p>000: Disables rate control (Default)</p> <p>001: 128Kbps</p> <p>010: 256Kbps</p> <p>011: 512Kbps</p> <p>100: 1Mbps</p> <p>101: 2Mbps</p> <p>110: 4Mbps</p> <p>111: 8Mbps</p>	RW	0000

Bits	Name	Description	RW	Default
7:4	P0TXRate[3:0]	Port 0 TX Bandwidth Control. Configures the maximum input bandwidth of the port. Bit 3 is a reserved bit. Bit[2:0] controls the maximum TX rate of the port. 000: Disables rate control (Default) 001: 128Kbps 010: 256Kbps 011: 512Kbps 100: 1Mbps 101: 2Mbps 110: 4Mbps 111: 8Mbps	RW	0000
11:8	P1RXRate[3:0]	Port 1 RX Bandwidth Control. Configures the maximum output bandwidth of the port. Bit 3 is a reserved bit. Bit[2:0] controls the maximum RX rate of the port. 000: Disables rate control (Default) 001: 128Kbps 010: 256Kbps 011: 512Kbps 100: 1Mbps 101: 2Mbps 110: 4Mbps 111: 8Mbps	RW	0000
15:12	P1TXRate[3:0]	Port 1 TX Bandwidth Control. Configures the maximum input bandwidth of the port. Bit 3 is a reserved bit. Bit[2:0] controls the maximum TX rate of the port. 000: Disables rate control (Default) 001: 128Kbps 010: 256Kbps 011: 512Kbps 100: 1Mbps 101: 2Mbps 110: 4Mbps 111: 8Mbps	RW	0000

### 11.7.1. 0x020BH~0x0215H: Port 2~23 Bandwidth Control Register

Refer to Table 62, page 71, for Configuration description of n: 1 ~ 11.

**Table 63. 0x020BH~0x0215H: Port 2~23 Bandwidth Control Register**

Bits	Name	Description	RW	Default
3:0	P2nRXRate[3:0]	Port 2n RX Bandwidth Control	RW	0000
7:4	P2nTXRate[3:0]	Port 2n TX Bandwidth Control	RW	0000
11:8	P2n+1RXRate[3:0]	Port 2n+1 RX Bandwidth Control.	RW	0000
15:12	P2n+1TXRate[3:0]	Port 2n+1 TX Bandwidth Control.	RW	0000

## 11.8. 0x0217H~0x0218: EEPROM RW Control Register

### 11.8.1. 0x0217H: EEPROM RW Command Register

**Table 64. 0x0217H: EEPROM RW Command Register**

Bits	Name	Description	RW	Default
7:0	EEPROM address		RW	0
10:8	CHIP_SEL[2:0]]		RW	0
11	Read/Write Operation	0: Write Operation 1: Read Operation	RW	0
12	Status	0: Idle 1: Busy	RW	0
13	Operation Succeeded status	0: Operation Succeeded 1: Operation Fail (Read Clear)	RW	0
15:14	Reserved			

### 11.8.2. 0x0218H: EEPROM RW Data Register

**Table 65. 0x0218H: EEPROM RW Data Register**

Bits	Name	Description	RW	Default
7:0	WdataEE[7:0]	Data to be written to EEPROM.	RW	0
15:8	RdataEE[15:8]	Data Read from EEPROM.	R	0

## 11.9. *0x0219H~0x021EH: Port Mirror Control Register*

### 11.9.1. **0x0219H: Port Mirror Control Register 0 for P15-P0**

**Table 66. Port Mirror Control Register for P15-P0**

Bits	Name	Description	RW	Default
15:0	EnPortMirror(0)[15:0]	Enables the port-based mirror function. Bit n corresponds to port n. Write ‘1’ to enable a port’s mirror function.	RW	0

### 11.9.2. **0x021AH: Port Mirror Control Register 1 for P23-P16**

**Table 67. Port Mirror Control Register for P23-P16**

Bits	Name	Description	RW	Default
7:0	EnPortMirror(1)[7:0]	Enables the port-based mirror function. Used for MD_24FX Bit n corresponds to port n. Write ‘1’ to enable a port’s mirror function	RW	0
15:8	Reserved			

### 11.9.3. **0x021BH: RX Mirror Port Register 0 for P15-P0**

**Table 68. RX Mirror Port Register 0 for P15-P0**

Bits	Name	Description	RW	Default
15:0	Mirror_RX(0)[15:0]	Bit n corresponds to port n. Write ‘1’ to duplicate port n RX data to mirrored port	RW	0

### 11.9.4. **0x021CH: RX Mirror Port Register 1 for P23-P16**

**Table 69. RX Mirror Port Register 1 for P23-P16**

Bits	Name	Description	RW	Default
7:0	Mirror_RX(1)[7:0]	Used for MD_24FX. Bit n corresponds to port n. Write ‘1’ to duplicate port n RX data to mirrored port	RW	0
15:8	Reserved			

### 11.9.5. 0x021DH: TX Mirror Port Register 0 for P15-P0

**Table 70. TX Mirror Port Register 0 for P15-P0**

Bits	Name	Description	RW	Default
15:0	Mirror_TX(0)[15:0]	Bit n corresponds to port n. Write '1' to duplicate port n TX data to mirrored port.	RW	0

### 11.9.6. 0x021EH: TX Mirror Port Register 1 for P23-P16

**Table 71. RX Mirror Port Register 1 for P23-P16**

Bits	Name	Description	RW	Default
7:0	Mirror_TX(1)[7:0]	Used for MD_24FX Bit n corresponds to port n. Write '1' to duplicate port n TX data to mirrored port.	RW	0
15:8	Reserved			

## 11.10. Address Lookup Table (ALT) Control Register

### 11.10.1. 0x0300H: ALT Configuration Register

**Table 72. 0x0300H: ALT Configuration Register**

Bits	Name	Description	RW	Default
0	DisMacAging	Global Disable Mac Table Aging Function. 0: Enable Aging function (Default) 1: Disable Aging function	RW	0
1	EnFastAgeTime	Enable Fast Aging Time Mode. 0: Disable Fast Aging time; Aging set to between 200~300 seconds (Default) 1: Enable Fast Aging time; Aging set to 12 seconds	RW	0
2	EnCtrlFFilter	Global Enable 802.1D Specified Reserved Control Frame Filtering. When network control packets are received with a destination MAC address as the group MAC address: (01-80-C2-00-00-04 ~ 01-80-C2-00-00-0F), the switch will drop the packets if the bit EnCtrlFilter=1. Otherwise (EnCtrlFilter=0) they will be flooded. 1: Enable Filtering (Default) 0: Disable Filtering	RW	1 HW pin. EnCtrlFFilter
3	EnDropUknDA	Internal test bit.	RW	0
15:4	Reserved			

## 11.10.2. 0x0301H: Address Learning Control Register 0

**Table 73. 0x0301H: Address Learning Control Register 0**

Bits	Name	Description	RW	Default
15:0	DisMacLearn[15:0]	Per-Port Disable Mac Address Learning Function (Ports 0~15). DisMacLearn[15:0] control port[15:0]. The Layer 2 MAC address learning function can be per-port disabled for security management purposes. Generally this register is used with the ALT Configuration Register (0x0300) bits ‘DisMacAging’. 0: Enable learning (Default) 1: Disable learning	RW	0

## 11.10.3. 0x0302H: Address Learning Control Register 1

**Table 74. 0x0302H: Address Learning Control Register 1**

Bits	Name	Description	RW	Default
7:0	DisMacLearn[23:16]	Per-Port Disable Mac Address Learning Function (port 16~25). DisMacLearn[23:16] control port[23:16]. The Layer 2 MAC address learning function can be per-port disabled for security management purposes. Generally this register is used with the ALT Configuration Register (0x0300H) bits ‘DisMacAging’ &. 0: Enable learning (Default) 1: Disable learning	RW	0
15:8	Reserved			

## 11.10.4. 0x0307H: Port Trunking Configuration Register

**Table 75. 0x0307H: Port Trunking Configuration Register**

Bits	Name	Description	RW	Default
0	Reserved			
6:1	EnTrunk[5:0]	Trunk Group Enable/Disable Control. Enables trunk groups.  EnTrunk[0] control for Trunk 1: (port 0, 1, 2, 3). EnTrunk[1] control for Trunk 2: (port 4, 5, 6, 7). EnTrunk[2] control for Trunk 3: (port 8, 9, 10, 11). EnTrunk[3] control for Trunk 4: (port 12, 13, 14, 15). EnTrunk[4] control for Trunk 5: (port 16, 17, 18, 19). EnTrunk[5] control for Trunk 6: (port 20, 21, 22, 23).  0: Disable Trunking (Default) 1: Enable Trunking	RW	0x00
15:7	Reserved			

### 11.10.5. 0x0308H: IGMP Snooping Control Register

**Table 76. 0x0308H: IGMP Snooping Control Register**

Bits	Name	Description	RW	Default
0	EnIGMPSnooping	Enable IGMP Snooping. The switch controller features an ASIC-based auto IGMP v1 snooping function. No software support is required. When enabled, the switch can automatically snoop IGMP packets and build up an IP multicast address table. The discovered IP multicast Router port will be indicated in the 'IP Multicast Router Port Discovery Register'. 0: Disable IGMP snooping (Default) 1: Enable IGMP snooping	RW	0
15:1	Reserved			

### 11.10.6. 0x0309H: IP Multicast Router Port Discovery Register (32 bits)

**Table 77. 0x0309H: IP Multicast Router Port Discovery Register (32 bits)**

Bits	Name	Description	RW	Default
23:0	IPMRouterDISC[23:0]	IP Multicast Router Ports Discovery Result. This is a bit map that indicates which port is an IP Multicast Router port. IPMRouterDISC[23:0] maps to port 23 ~ 0 0: Normal port (Default) 1: IP multicast Router port	R	0
31:24	Reserved			

### 11.10.7. 0x030BH: VLAN Control Register

**Table 78. 0x030BH: VLAN Control Register**

Bits	Name	Description	RW	Default
0	EnHomeVlan	Enable VLAN Function. When the VLAN function is enabled, the power on default VLAN topology is 24 Home VLANs for non-EEPROM environments. The VLAN topology can be configured by Port VLAN Configuration Registers. 0: Disable VLAN (Default) 1: Enable VLAN	RW	0 HW pin. EnHomeVLAN
1	EnUCleaky	Unicast Packet Inter-VLAN Leaky Control. Enables inter-VLAN communication for unicast forwarding packets. Normally, inter-VLAN packet switching is not valid. The RTL8324P supports a control bit to enable inter-VLAN communication in the switch without an external router. 0: Disable (Default) 1: Enable	RW	0

Bits	Name	Description	RW	Default
2	EnARPPleaky	ARP broadcast Packet Inter-VLAN Leaky Control. Enables inter-VLAN communication for ARP broadcast packet forwarding. 0: Disable (Default) 1: Enable	RW	0
3	EnIPMleaky	IP Multicast Packet Inter-VLAN Leaky Control. Enables inter-VLAN communication for ARP broadcast packet forwarding. 0: Disable (Default) 1: Enable	RW	0
4	En8021Qaware	Enable 802.1Q VLAN tag aware. If 802.1Q VLAN aware, the switch supports the ability to identify the VLAN ID from the VLAN tag. Reset to force the switch to ignore the VLAN tag header and classify the VLAN only by the PVID. 0: Disable 802.1Q VLAN aware (Default) 1: Enable 802.1Q VLAN aware	RW	0
5	EnIR_TagAdmit	Ingress Rule for Acceptable frame types control. If this parameter is set to ‘Admit only VLAN-Tagged Frames’, any frames received on that port that carry no VID (i.e., Untagged Frames or Priority-Tagged Frames) are discarded. If this parameter is set to ‘Admit all Frames’, all incoming Priority-Tagged and Untagged Frames are associated with a VLAN by the ingress rule on the receiving port. 0: Admit all Frames (Default) 1: Admit only VLAN-Tagged Frames	RW	0
6	EnIR_MembSet	Ingress Rule for Ingress Filtering control. If the Enable Ingress Filtering parameter ‘EnIR_MembSet’ is set, then all frames received on a port whose VLAN classification does not include that port in its member set shall be discarded. 0: Disable ingress member set Filtering (Default) 1: Enable ingress member set filtering	RW	0
15:7	Reserved			

## 11.10.8. 0x030C~0x0317H: Port VLAN ID Assignment Index Register 0~11

For Port(2n), and Port(2n+1) the register is defined as follows: where n=0, 1, 2, ... 10, 11  
 (Addr: 0x030CH + n).

**Table 79. 0x030C~0x0317H: Port VLAN ID Assignment Index Register 0~11**

Bits	Name	Description	RW	Default
7:0	P(2n)_VIDIndex[7:0]	Port(2n) VID assignment Index. Bit[4:0]: Port VID assignment index. Use the index value as the offset to map to the VLAN configuration table to get a 12-bit Port VLAN ID. Bit[7:5]: Reserved	RW	n
15:8	P(2n+1)_VIDIndex[7:0]	Port(2n+1) VID assignment Index. Bit[4:0]: Port VID assignment index. Use the index value as the offset to map to the VLAN configuration table to get a 12-bit Port VLAN ID. Bit[7:5]: Reserved	RW	2n+1

## 11.10.9. 0x0319~0x031BH: VLAN Output Port Priority-Tagging Control Register 0, 1, 2

For Port(8n), Port(8n+1), .... ~ Port(8n+7) the register is defined as follows: n=0, 1, 2

**Table 80. 0x0319~0x031BH: VLAN Output Port Priority-Tagging Control Register 0, 1, 2**

Bits	Name	Description	RW	Default
1:0	P(8n)_PriTagCtl[1:0]	Port(8n) VLAN Output priority Tag/Untag Control. 00: Remove the VLAN tag from a tagged frame 01: Insert priority tag into an untagged high-priority frame (set priority field: 7, VID field: 0 for high priority frame) 10: Insert priority tag into all untagged frames. (set priority field: 7, VID field: 0 for high priority frame; set priority field: 0, VID field: 0 for low priority frame) 11: Don't touch (Don't modify the packet) (Default)	RW	11
3:2	P(8n+1)_PriTagCtl[1:0]	Port(8n+1) VLAN Output priority Tag/Untag Control.	RW	11
5:4	P(8n+2)_PriTagCtl[1:0]	Port(8n+2) VLAN Output priority Tag/Untag Control.	RW	11
7:6	P(8n+3)_PriTagCtl[1:0]	Port(8n+3) VLAN Output priority Tag/Untag Control.	RW	11
9:8	P(8n+4)_PriTagCtl[1:0]	Port(8n+4) VLAN Output priority Tag/Untag Control.	RW	11
11:10	P(8n+5)_PriTagCtl[1:0]	Port(8n+5) VLAN Output priority Tag/Untag Control.	RW	11
13:12	P(8n+6)_PriTagCtl[1:0]	Port(8n+6) VLAN Output priority Tag/Untag Control.	RW	11
15:14	P(8n+7)_PriTagCtl[1:0]	Port(8n+7) VLAN Output priority Tag/Untag Control.	RW	11

## 11.11. **0x031D~0x037CH: VLAN Table Configuration Register**

Each VLAN configuration entry requires three 16-bit registers. There are 32 VLAN configuration entries in the VLAN table. The VLAN configuration entry is combined with three registers: VLAN\_Entry\_Configuration\_0, 1, 2. For VLAN m, its format is defined as follows: m=0, 1, 2, ..., 31.

### 11.11.1. **Register VLAN(m)\_Entry\_Configuration\_0** **(Addr: (0x031DH+3m))**

**Table 81. Register VLAN(m)\_Entry\_Configuration\_0 (Addr: (0x031DH+3m))**

Bits	Name	Description	RW	Default
15:0	VLAN(m)_PM[15:0]	VLAN (entry m) Port Member, 24-bit map (bit 0~15). Bit value 0: Port is not a member of the VLAN Bit value 1: Port is a member of the VLAN	RW	-

### 11.11.2. **Register VLAN(m)\_Entry\_Configuration\_1** **(Addr: (0x031DH+3m+1))**

**Table 82. Register VLAN(m)\_Entry\_Configuration\_1 (Addr: (0x031DH+3m+1))**

Bits	Name	Description	RW	Default
7:0	VLAN(m)_PM[23:16]	VLAN(m) Port Member 24-bit map (bit 16~23). Bit value 0: Port is not a member of the VLAN Bit value 1: Port is a member of the VLAN	RW	-
15:8	Reserved			

### 11.11.3. **Register VLAN(m)\_Entry\_Configuration\_2** **(Addr: (0x031DH+3m+2))**

**Table 83. Register VLAN(m)\_Entry\_Configuration\_2 (Addr: (0x031DH+3m+2))**

Bits	Name	Description	RW	Default
11:0	VLAN(m)_VID[11:0]	VLAN(m) VID[11:0] bit 11~0. Each VLAN must be assigned a 12-bit VID.	RW	0
15:12	Reserved			

## 11.12. *0x037D~0x037EH: Insert Per-Port VID (PVID) Enabling Register*

### 11.12.1. **0x037D: Insert Per-Port VID (PVID) Enabling Register 0 (P15~P0)**

**Table 84. Insert Per-Port VID (PVID) Enabling Register 0**

Bits	Name	Description	RW	Default
15:0	InsPVID_0[15:0]	To enable per-port insert PVID function (P15-P0). 0: Disable (default) 1: Enable	RW	0

### 11.12.2. **0x037E: Insert Per-Port VID (PVID) Enabling Register 1 (P23~P16)**

**Table 85. Insert Per-Port VID (PVID) Enabling Register 1**

Bits	Name	Description	RW	Default
7:0	InsPVID_1[7:0]	To enable per-port insert PVID function. (P23-P16) 0: Disable (default) 1: Enable	RW	0
15:8	Reserved			

## 11.13. QoS Configuration Register

### 11.13.1. 0x0400H: QoS Control Register

**Table 86. 0x0400H: QoS Control Register**

Bits	Name	Description	RW	Default
0	EnDSPri	<p>Enable TCP/IP TOS/DS (DiffServ) based Priority QoS.            0: Disabled (Default)            1: Enabled            When enabled, the priority definition is defined as follows:            High Priority: If TOS/DS[0:5]:            (EF) ‘101110’;            (AF) ‘001010’, ‘010010’,            ‘011010’, ‘100010’;            (Network Control) ‘11x000’            Low Priority: TOS/DS = Other codepoint values  <i>Note 1: The DS[0:5] bit location is equal to the mapping of TOS[0:5] ={precedence[2:0], Delay, Throughput, Reliability}.</i>  <i>Note 2: DS=Differentiated Services, EF= Expected Forwarding, AF= Assured Forwarding.</i></p>	RW	0
1	En8021pPri	<p>Enable 802.1p VLAN Tag Based Priority QoS Function.            0: Disable (Default)            1: Enable</p>	RW	0
2	EnFCAutoOff	<p>Enable Flow Control Ability Auto Turn Off for QoS.            Enabled: Enables auto turn off of a port’s queue flow control ability for 1~2 seconds whenever the port receives a high priority frame. The flow control ability of this port is re-enabled when no high priority frames are received at this port during a 1~2 second period.            Disabled: When EnFCAutoOff is disabled, the flow control ability of this port for any packet will be enabled as it was set.            0: Disabled (Default)            1: Enabled</p>	RW	0
4:3	QWEIGHT[1:0]	<p>Weighted round robin ratio setting of priority queue.            The frame service rate of High-pri queue to Low-pri queue is:            00: 4:1 (Default)            01: 8:1            10: 16:1            11: High priority queue first always</p>	RW	00
15:5	Reserved			

### 11.13.2. 0x0401: Port Priority Configuration Register 0

**Table 87. 0x0401: Port Priority Configuration Register 0**

Bits	Name	Description	RW	Default
15:0	PortPriCfg[15:0]	Port-based Priority setting (Port0 ~ Port15). Sets the priority QoS based on the physical port. If a port is set as a high priority port, all packets received from that port will be treated as high priority packets. Bit value 1: Sets that port as a high priority port Bit value 0: Sets that port as a low priority port <i>Note: Ports 0~15 map to bits 0~15.</i>	RW	0

### 11.13.3. 0x0402: Port Priority Configuration Register 1

**Table 88. 0x0402: Port Priority Configuration Register 1**

Bits	Name	Description	RW	Default
7:0	PortPriCfg[23:16]	Port based Priority setting (Port16 ~ Port23). Sets the priority QoS based on the physical port. If a port is set as a high priority port, all packets received from that port will be treated as high priority packets. Bit value 1: Sets that port as a high priority port Bit value 0: Sets that port as a low priority port <i>Note: Ports 16~23 map to bits 0~7.</i>	RW	0
15:8	Reserved			

## 11.14. *PHY Access Control Register*

### 11.14.1. 0x0500H: PHY Access Control Register

**Table 89. 0x0500H: PHY Access Control Register**

Bits	Name	Description	RW	Default
4:0	REG_addr	PHY Register address setting for the PHY Access command.	RW	0
9:5	PHY_ID[4:0]	PHY ID (PHY address) setting for the PHY Access command. RTL8324P connected PHY ID is fixed as: Fast Ethernet Port0 ~ 15. PHY ID: 16,17, ..., 30, 31. Fast Ethernet Port16 ~ 23. PHY ID: 8,9, ..., 14, 15.	RW	0
13:10	Reserved			0
14	PHY_RW	PHY Access Command. 0: PHY Access Read command (Default) 1: PHY Access Write command	RW	0
15	PHYCmdExeSta	PHY Access Command Execution Status. 0: Idle (Default) 1: Busy	R	0

### 11.14.2. 0x0501H: PHY Access Write Data Register

**Table 90. 0x0501H: PHY Access Write Data Register**

Bits	Name	Description	RW	Default
15:0	PHY_WD[15:0]	PHY Access Write Out Data (16 bits).	RW	0

### 11.14.3. 0x0502H: PHY Access Read Data Register

**Table 91. 0x0502H: PHY Access Read Data Register**

Bits	Name	Description	RW	Default
15:0	PHY_RD[15:0]	PHY Access Read In Data (16 bits).	R	0

## 11.15. Port Control Register

### 11.15.1. 0x0607H: Global Port Control Register

**Table 92. 0x0607H: Global Port Control Register**

Bits	Name	Description	RW	Default
0	DisFDFC  ( $\overline{\text{EnFDFC}}$ )	Disable Full Duplex Flow Control (802.3x PAUSE ability). This control bit will be applied to the switch only when a software reset is sent to the switch. This function can also be directly controlled by PHY register access through the PHY Access Control Register 0: Enable 802.3x Pause ability (Default) 1: Disable 802.3x Pause ability	RW	0 HW pin: EnFDFC
1	DisBKP  ( $\overline{\text{EnBKP}}$ )	Globally Disable Half Duplex Back Pressure Flow Control Ability. Set to globally disable the back pressure flow control ability of all ports. 0: Enable back pressure flow control ability (Default) 1: Disable back pressure flow control ability	RW	0 HW pin. EnBKP
2	DisBCSFC	Disable Broadcast Packet Strict Flood Control. This control function is used under 802.3x flow control mode. Strict flood mode will drop broadcast packets (DA: FF-FF-FF-FF-FF-FF) if any destination port member is congested. Loose flood mode allows broadcast packets to be flooded to all non-congested ports. 0: Enable Broadcast Packet Strict Flood (Strict flood mode) (Default) 1: Disable Broadcast Packet Strict Flood (Loose flood mode)	RW	0 HW pin. DisBCSFC
3	DisIPMCFC	Disable IP Multicast Packet Strict Flood Control. This control function is used under 802.3x flow control mode. Strict flood mode will drop IP Multicast packets (DA: 01-00-5E-XX-XX-XX) if any destination port member is congested. Loose flood mode allows IP multicast packets to be flooded to all non-congested ports. 0: Enable IP Multicast Packet Strict Flood (Loose flood mode) (Default) 1: Disable IP Multicast Packet Strict Flood (Strict flood mode)	RW	0
4	DisBRDCTRL  ( $\overline{\text{EnBRDCTRL}}$ )	Disable Broadcast Storm Filtering Control. Set to disable the broadcast storm filtering control function. 1: Disable Broadcast storm filtering control (Default) 0: Enable Broadcast storm filtering control	RW	1 HW pin: EnBRDCTRL
15:5	Reserved			

### 11.15.2. 0x0608H: Port Disable Control Register 0

**Table 93. 0x0608H: Port Disable Control Register 0**

Bits	Name	Description	RW	Default
15:0	PortDisable[15:0]	Port Enable/Disable Control for ports 0~15. Bit value 0: Port enable Bit value 1: Port disable When disabled, the port will disable packet transmission and reception except for Realtek Remote Control Packets. <i>Note: Ports 0~15 map to bits 0~15.</i>	RW	0

### 11.15.3. 0x0609H: Port Disable Control Register 1

**Table 94. 0x0609H: Port Disable Control Register 1**

Bits	Name	Description	RW	Default
7:0	PortDisable[23:16]	Port Enable/Disable Control for ports 16~23. Bit value 0: Port enable Bit value 1: Port disable When disabled, the port will disable packet transmission and reception except for Realtek Remote Control Packets. <i>Note: Ports 16~23 map to bits 0~7.</i>	RW	0
15:8	Reserved			

### 11.15.4. 0x060AH~0x0615. Port Property Configuration Register 0 ~ 11

For Port(2n) and Port(2n+1) the Port Property is defined as follows: n = 0, 1, 2, ..., 11 (Addr: 0x060AH +n); where n=0~11 for Fast Ethernet ports.

**Table 95. 0x060AH~0x0615. Port Property Configuration Register 0 ~ 11**

Bits	Name	Description	RW	Default
7:0	P(2n)_Property[7:0]	Port(2n) Port Property configuration. Bit [3:0]: Media Capability[3:0] = {100F, 100H, 10F, 10H}. Bit [5]: Pause ability (1: Enable). Bit [6]: AsyPause ability (Asynchronous Pause) (1: enable) Bit [7]: Enable Auto Negotiation (1: Enable).	RW	100M. 0xAF
15:8	P(2n+1)_Property[7:0]	Port(2n+1) Port property configuration. Bit [3:0]: Media Capability[3:0] = {100F, 100H, 10F, 10H}. Bit [5]: Pause ability (1: Enable). Bit [6]: AsyPause ability ( Asynchronous Pause) (1: Enable). Bit [7]: Enable Auto Negotiation (1: Enable).	RW	100M. 0xAF

*Note: A configuration update of these registers requires a software reset (via write Reg. 0x0000 bit 0 =1) to force the configuration to be written to the PHY register and restart the auto-negotiation process.*

### 11.15.5. 0x0619H~0x0624. Port Link Status Register 0 ~ 11

For Port(2n) and Port(2n+1) the Port Properties are defined as follows:  
(n: 0,1,2,. ...., 11) (Addr: 0x0619H +n).

**Table 96. 0x0619H~0x0625. Port Link Status Register 0 ~ 11**

Bits	Name	Description	RW	Default
7:0	P(2n)_LinkStatus[7:0]	<p>Port (2n) Port Link Status.</p> <p>Bit [1:0]: Link speed[1:0]:  00: 10Mbps  01: 100Mbps  10: 1000Mbps  11: NA.</p> <p>Bit [2]: Full duplex:  0: Half duplex  1: Full duplex</p> <p>Bit[3]: Reserved.</p> <p>Bit [4]: Link up:  0: Link down  1: Link up</p> <p>Bit [5]: Flow control (back pressure or 802.3x):  For ports 0~23 (Fast Ethernet ports). Defined as Pause ability.  In half duplex mode. Defined as back pressure ability.  0: Flow control disabled  1: Flow control enabled</p> <p>Bit [6]: AsyPause ability (Asymmetric Pause):  For ports 0~23 (Fast Ethernet ports) Don't Care.  In half duplex mode. Don't Care.  0: Flow control disabled  1: Flow control enabled</p> <p>Bit [7]: Enable Auto Negotiation (AN):  0: Disable AN  1: Enable AN</p>	R	0

Bits	Name	Description	RW	Default
15:8	P(2n+1)_LinkStatus[7:0]	<p>Port(2n+1) Port Link Status.</p> <p>Bit [1:0]: Link speed[1:0]:</p> <ul style="list-style-type: none"> <li>00: 10Mbps</li> <li>01: 100Mbps</li> <li>10: 1000Mbps</li> <li>11: NA.</li> </ul> <p>Bit [2]: Full duplex:</p> <ul style="list-style-type: none"> <li>0: Half duplex</li> <li>1: Full duplex</li> </ul> <p>Bit[3]: Reserved.</p> <p>Bit [4]: Link up:</p> <ul style="list-style-type: none"> <li>0: Link down</li> <li>1: Link up</li> </ul> <p>Bit [5]: Flow Control (back pressure or 802.3x):</p> <ul style="list-style-type: none"> <li>For ports 0~23 (Fast Ethernet ports). Defined as Pause ability.</li> <li>In half duplex mode. Defined as back pressure ability.</li> <li>0: Flow control disabled</li> <li>1: Flow control enabled</li> </ul> <p>Bit [6]: AsyPause ability (Asymmetric Pause):</p> <ul style="list-style-type: none"> <li>For ports 0~23 (Fast Ethernet ports) Don't Care.</li> <li>In half duplex mode. Don't Care.</li> <li>0: Flow control disabled</li> <li>1: Flow control enabled</li> </ul> <p>Bit [7]: Enable Auto Negotiation (AN):</p> <ul style="list-style-type: none"> <li>0: Disable AN</li> <li>1: Enable AN</li> </ul>	R	0

## 12. MIB Counter Register

### 12.1. ***0x0700H~0x070BH: Port MIB Counter Object Selection Register 0~11***

For Port(2n), Port(2n+1), the Port MIB Counter Object Selection Register is defined as follows:  
 $n = 0, 1, 2, \dots, 11$  (Addr=0x0700H +n).

**Table 97. 0x0700H~0x070BH: Port MIB Counter Object Selection Register 0~11**

Bits	Name	Description	RW	Default
1:0	P(2n)CNT1_MIBS [1:0]	Port(2n) Counter_1 MIB Object Selection. P(2n)CNT_1_MIBS [1:0] 00: MIB object: RX byte count 01: MIB object: RX packet count (Default) 10: MIB object: CRC error packet count 11: MIB object: Collision packet count  RX byte count. This counter is incremented once for every data byte of a received and forwarded packet (includes both good and bad packets). RX packet count. This counter is incremented once for every received and forwarded packet (includes both good and bad packets).	RW	01
3:2	P(2n)CNT2_MIBS [1:0]	Port(2n) Counter_2 MIB Object Selection. P(2n)CNT_2_MIBS [1:0] 00: MIB object: TX byte count 01: MIB object: TX packet count (Default) 10: MIB object: CRC error packet count 11: MIB object: Collision packet count  TX byte count. This counter is incremented once for every data byte of a transmitted packet (includes both good and bad packets). TX packet count. This counter is incremented once for every transmitted packet (includes both good and bad packets).	RW	01

Bits	Name	Description	RW	Default
5:4	P(2n)CNT3_MIBS [1:0]	Port(2n) Counter_3 MIB Object Selection P(2n)CNT_3_MIBS [1:0] 00: MIB object: Drop byte count 01: MIB object: Drop packet count (Default) 10: MIB object: CRC error packet count 11: MIB object: Collision packet count  Drop packet count. This counter is incremented once for every drop of a received packet. Packet drop events could be due to undersize, oversize, CRC error, lack of resources, local packet, point-to-point control packet (ex. Pause packet, LACP packet, including RRC® packets). CRC error packet count. This counter is incremented once for every received packet with a valid length but with a CRC error. Collision packet counter. This counter is incremented once for every collision event detected.	RW	01
7:6	P(2n+1)CNT1_MIBS [1:0]	Port(2n+1) Counter_1 MIB Object Selection.	RW	01
9:8	P(2n+1)CNT2_MIBS [1:0]	Port(2n+1) Counter_2 MIB Object Selection.	RW	01
11:10	P(2n+1)CNT3_MIBS [1:0]	Port(2n+1) Counter_3 MIB Object Selection.	RW	01

## 12.2. ***0x070DH ~0724H: Port MIB Counter 1 Register (RX Counter) (32 bits)***

The MIB counters are 32-bit counters. After power on reset, the counters are all reset to 0. A read access of the MIB counter will NOT reset the counter to 0. When a MIB counter MIB object is changed, then the counter will be reset to 0 and the count will restart.

The time before the next read of the same counter should not be longer than the counter's timeout. The timeout of the 32-bit MIB counter depends on the object type and the port speed, and is calculated as follows:

Packet counter timeout is calculated based on 64-byte packets and byte counter timeout is calculated based on 1518 byte packets).

**Table 98. MIB Counter Timeout**

Port Speed	MIB Object Type	MIB Counter Timeout (Sec.)
100Mbps	Packet count	28862
	Byte count	348
10Mbps	Packet count	288621
	Byte count	3481

### 12.2.1. For Port(n) MIB Counter 1 Register (32-bit). n=0, 1, 2, ... 23 (Addr: 0x070DH+n)

**Table 99. 0x070DH ~0724H: Port MIB Counter 1 Register (RX Counter) (32 bits)**

Bits	Name	Description	RW	Default
31:0	Port(n)_MIB_CNT_1[31:0]	Port(n) MIB Counter_1[31:0]	R	0

### 12.2.2. 0x0727~073EH: Port MIB Counter 2 Register (TX Counter) (32-bits)

For Port(n) MIB Counter 2 Register (32-bit): n = 0, 1, 2, ... 23 (Addr: 0x0727H+n).

**Table 100. 0x0727~073EH: Port MIB Counter 2 Register (TX Counter) (32 bits)**

Bits	Name	Description	RW	Default
31:0	Port(n)_MIB_CNT_2[31:0]	Port(n) MIB Counter_2[31:0]	R	0

### 12.2.3. 0x0741~0758H: Port MIB Counter 3 Register (Diagnostic Counter) (32-bits)

For Port(n) MIB Counter 3 Register (32-bit): n = 0, 1, 2, ... 23 (Addr: 0x0741H+n).

**Table 101. 0x0741~0758H: Port MIB Counter 3 Register (Diagnostic Counter) (32 bits)**

Bits	Name	Description	RW	Default
31:0	Port(n)_MIB_CNT_3[31:0]	Port(n) MIB Counter_3[31:0]	R	0

## 13. Characteristics

### 13.1. Absolute Maximum Ratings

WARNING: Absolute maximum ratings are limits beyond which permanent damage may be caused to the device or which may affect device reliability. All voltages are specified reference to GND unless otherwise specified.

**Table 102. Absolute Maximum Ratings**

Parameter	Min	Max	Units
Storage Temperature	-10	+125	°C
DVDD, RVDD, AVDD Supply Referenced to GND	GND-0.3	+3.63	V
VDD Supply Reference to GND	GND-0.3	+1.98	V
Digital Input Voltage	GND-0.3	DVDD+0.3	V

### 13.2. Operating Range

**Table 103. Operating Range**

Parameter	Min	Typical	Max	Units
Ambient Operating Temperature	0	-	70	°C
3.3V Supply Voltage Range (RVDD, DVDD, AVDD)	3.15	3.3	3.45	V
1.8V Supply Voltage Range (VDD)	1.71	1.8	1.89	V

### 13.3. DC Characteristics

Supply Voltage VDD: 3.3V ± 5%.

**Table 104. DC Characteristics**

Parameter	Pin Name	Condition	Min	Typical	Max	Units
Power Supply Current	Icc	24FE, wire-speed traffic load 24FE all idle			280 170	mA
Total Power Consumption	PS	24FE, wire-speed traffic load 24FE all idle			924 561	mW
TTL Input High Voltage	V <sub>ih</sub>		2.0			V
TTL Input Low Voltage	V <sub>il</sub>				0.8	V
TTL Input Current	I <sub>in</sub>		-10		10	µA
TTL Input Capacitance	C <sub>in</sub>			2.9		pF
Output High Voltage	V <sub>oh</sub>		2.6		3.6	V
Output Low voltage	V <sub>ol</sub>		0		0.4	V

## 13.4. AC Characteristics

### 13.4.1. PHY Management (SMI) Timing

Table 105. PHY Management (SMI) Timing

Pin Name	Description	Minimum	Typical	Maximum	Units
t1	MDC clock period	-	1360	-	ns
t2	MDC high level width	-	680	-	ns
t3	MDC low level width	-	680	-	ns
t4	MDIO to MDC rising setup time (Write Bits)		680	-	ns
t5	MDIO to MDC rising hold time (Write Bits)		680	-	ns
t6	MDC to MDIO delay (Read Bits)	20	-	-	ns
t7	MDC/MDIO actives from RST# deasserted	-	45	-	ms

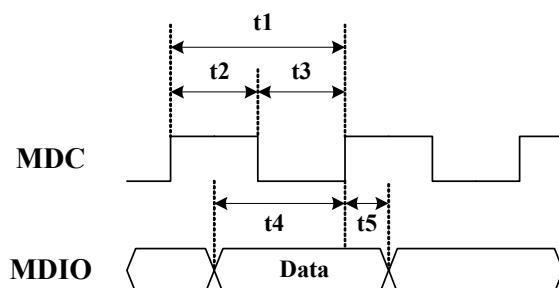


Figure 15. MDC/MDIO Write Timing

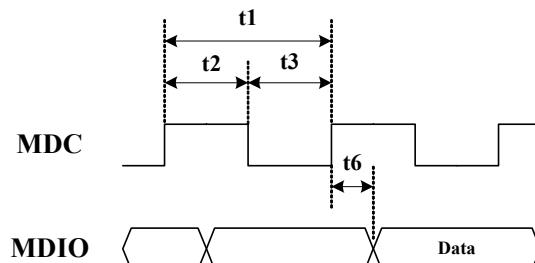


Figure 16. MDC/MDIO Read Timing

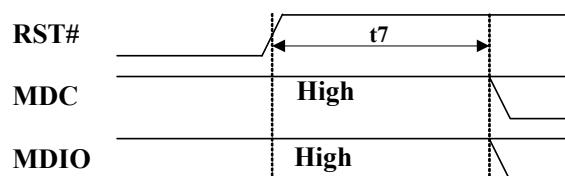


Figure 17. MDC/MDIO Reset Timing

### 13.4.2. SMII Transmit Timing

Table 106. PHY Management (SMI) Timing

Pin Name	Description	Minimum	Typical	Maximum	Units
T_opd_txd_smii	REFCLK rising edge to TXD (SYNC) delay.	2	4	5	ns

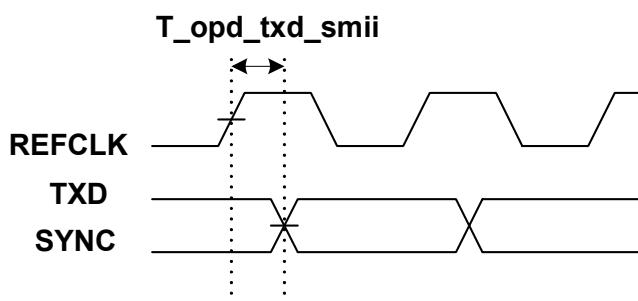


Figure 18. SMII Transmit Timing

### 13.4.3. SMII Receive Timing

Table 107. SMII Receive Timing

Pin Name	Description	Minimum	Typical	Maximum	Units
T_ipsu_rxd_smii	RXD setup time to REFCLK.	2			ns
T_iphd_rxd_smii	RXD hold time from REFCLK.	1.5			ns

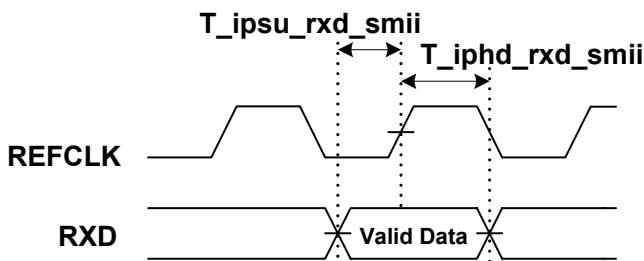


Figure 19. SMII Receive Timing

## 14. Thermal Data

### Thermal Characteristics

Heat generated by the chip causes a temperature rise of the package. If the temperature of the chip ( $T_j$ , junction temperature) is beyond the design limits, there will be negative effects on operation and the life of the IC package. Heat dissipation, either through a heat sink or electrical fan, is necessary to provide a reasonable environment ( $T_a$ , ambient temperature) in a closed case. As power density increase, thermal management becomes more critical. A method to estimate the possible  $T_a$  is outlined below.

Thermal parameters are defined according to JEDEC standard JESD 51-2, 51-6:

$\Theta_{ja}$  (Thermal resistance from junction to ambient), represents resistance to heat flow from the chip to ambient air. This is an index of heat dissipation capability. A lower  $\Theta_{ja}$  means better thermal performance.


$$\Theta_{ja} = (T_j - T_a) / P_h, \text{ where } T_j \text{ is the junction temperature}$$

$T_a$  is the ambient temperature

$P_h$  is the power dissipation

$\Theta_{jc}$  (Thermal resistance from junction to case), represents resistance to heat flow from the chip to the package top case.  $\Theta_{jc}$  is important when an external heat sink is attached on the package top.

$$\Theta_{jc} = (T_j - T_c) / P_h, \text{ where } T_j \text{ is the junction temperature.}$$

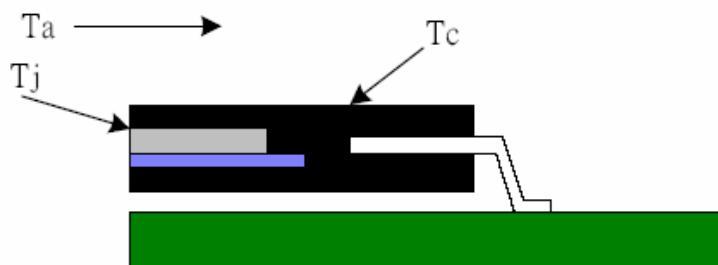

**Figure 20. Cross-section of 128 QFP**

## Thermal Operating Range

**Table 108. Thermal Operating Range**


Parameter	SYM	Conditions	Min	Typical	Max	Units
Junction operating Temperature	T <sub>j</sub>			25	125	°C
Junction operating Temperature	T <sub>a</sub>			25	70	°C

## Thermal Resistance

**Table 109. Thermal Resistances**

Parameter	SYM	Conditions	Min	Typical	Max	Units
Thermal resistance: junction to ambient	Θ <sub>ja</sub>	2 layer PCB, 0 ft/s airflow		48.5		°C/W
Thermal resistance: junction to case	Θ <sub>jc</sub>	2 layer PCB, 0 ft/s airflow		16.4		°C/W

## 15. Mechanical Information

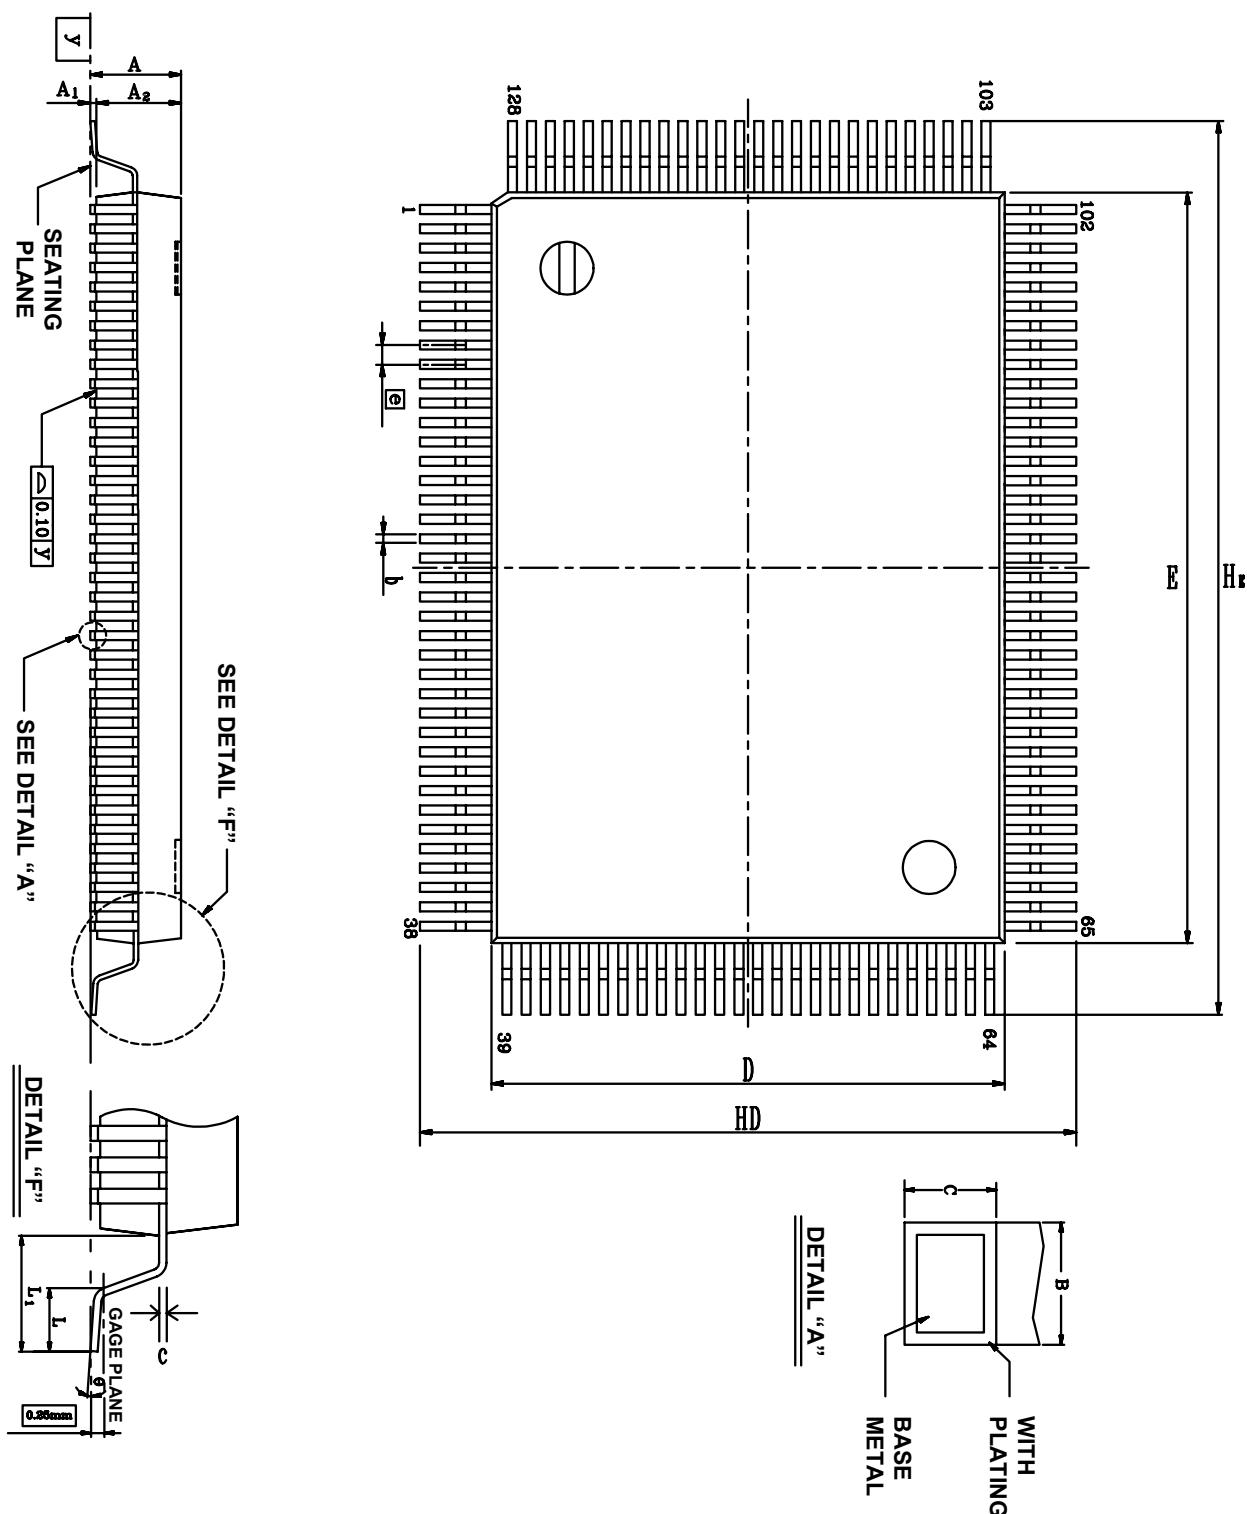

See the Mechanical Dimensions notes on the next page.

## 15.1. Mechanical Dimensions Notes

Symbol	Dimensions in inches			Dimensions in mm		
	Min	Typical	Max	Min	Typical	Max
<b>A</b>	-	-	0.134	-	-	3.40
<b>A1</b>	0.004	0.010	0.036	0.10	<b>0.25</b>	0.91
<b>A2</b>	0.102	0.112	0.122	2.60	<b>2.85</b>	3.10
<b>b</b>	0.005	0.009	0.013	0.12	<b>0.22</b>	0.32
<b>c</b>	0.002	0.006	0.010	0.05	<b>0.15</b>	0.25
<b>D</b>	0.541	0.551	0.561	13.75	<b>14.00</b>	14.25
<b>E</b>	0.778	0.787	0.797	19.75	<b>20.00</b>	20.25
<b>e</b>	0.010	0.020	0.030	0.25	<b>0.5</b>	0.75
<b>HD</b>	0.665	0.677	0.689	16.90	<b>17.20</b>	17.50
<b>HE</b>	0.902	0.913	0.925	22.90	<b>23.20</b>	23.50
<b>L</b>	0.027	0.035	0.043	0.68	<b>0.88</b>	1.08
<b>L1</b>	0.053	0.063	0.073	1.35	<b>1.60</b>	1.85
<b>y</b>	-	-	0.004	-	-	0.10
<b>θ</b>	0°	-	12°	0°	-	12°

Notes:

1. Dimensions D & E do not include interlead flash.
2. Dimension b does not include dambar rotrusion/intrusion.
3. Controlling dimension: Millimeter
4. General appearance spec. Should be based on final visual inspection.

TITLE: -CU L/F, PQFP FOOTPRINT 3.2 mm	
LEADFRAME MATERIAL:	
APPROVE	DOC. NO.
	VERSION
	PAGE
CHECK	DWG NO.
	DATE
REALTEK SEMICONDUCTOR CORP.	

## 16. Ordering Information

Table 110. Ordering Information

Part Number	Package	Status
RTL8324P	PQFP-128	Available Now
RTL8324P-LF	RTL8324P with Lead (Pb)-Free package	Available Now

Note: See page 5 for lead (Pb)-free package identification.

---

**Realtek Semiconductor Corp.**

**Headquarters**

No. 2, Innovation Road II

Hsinchu Science Park, Hsinchu 300, Taiwan

Tel.: +886-3-578-0211. Fax: +886-3-577-6047

[www.realtek.com.tw](http://www.realtek.com.tw)